SCIENTIFIC AMERICAN

(Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1904, by Munn & Co.)

Vol. XCI.—No. 2.
ESTABLISHED 1845.

NEW YORK. JULY 9, 1904

[8 CENTS A COPY
$3.00 A YEAR.

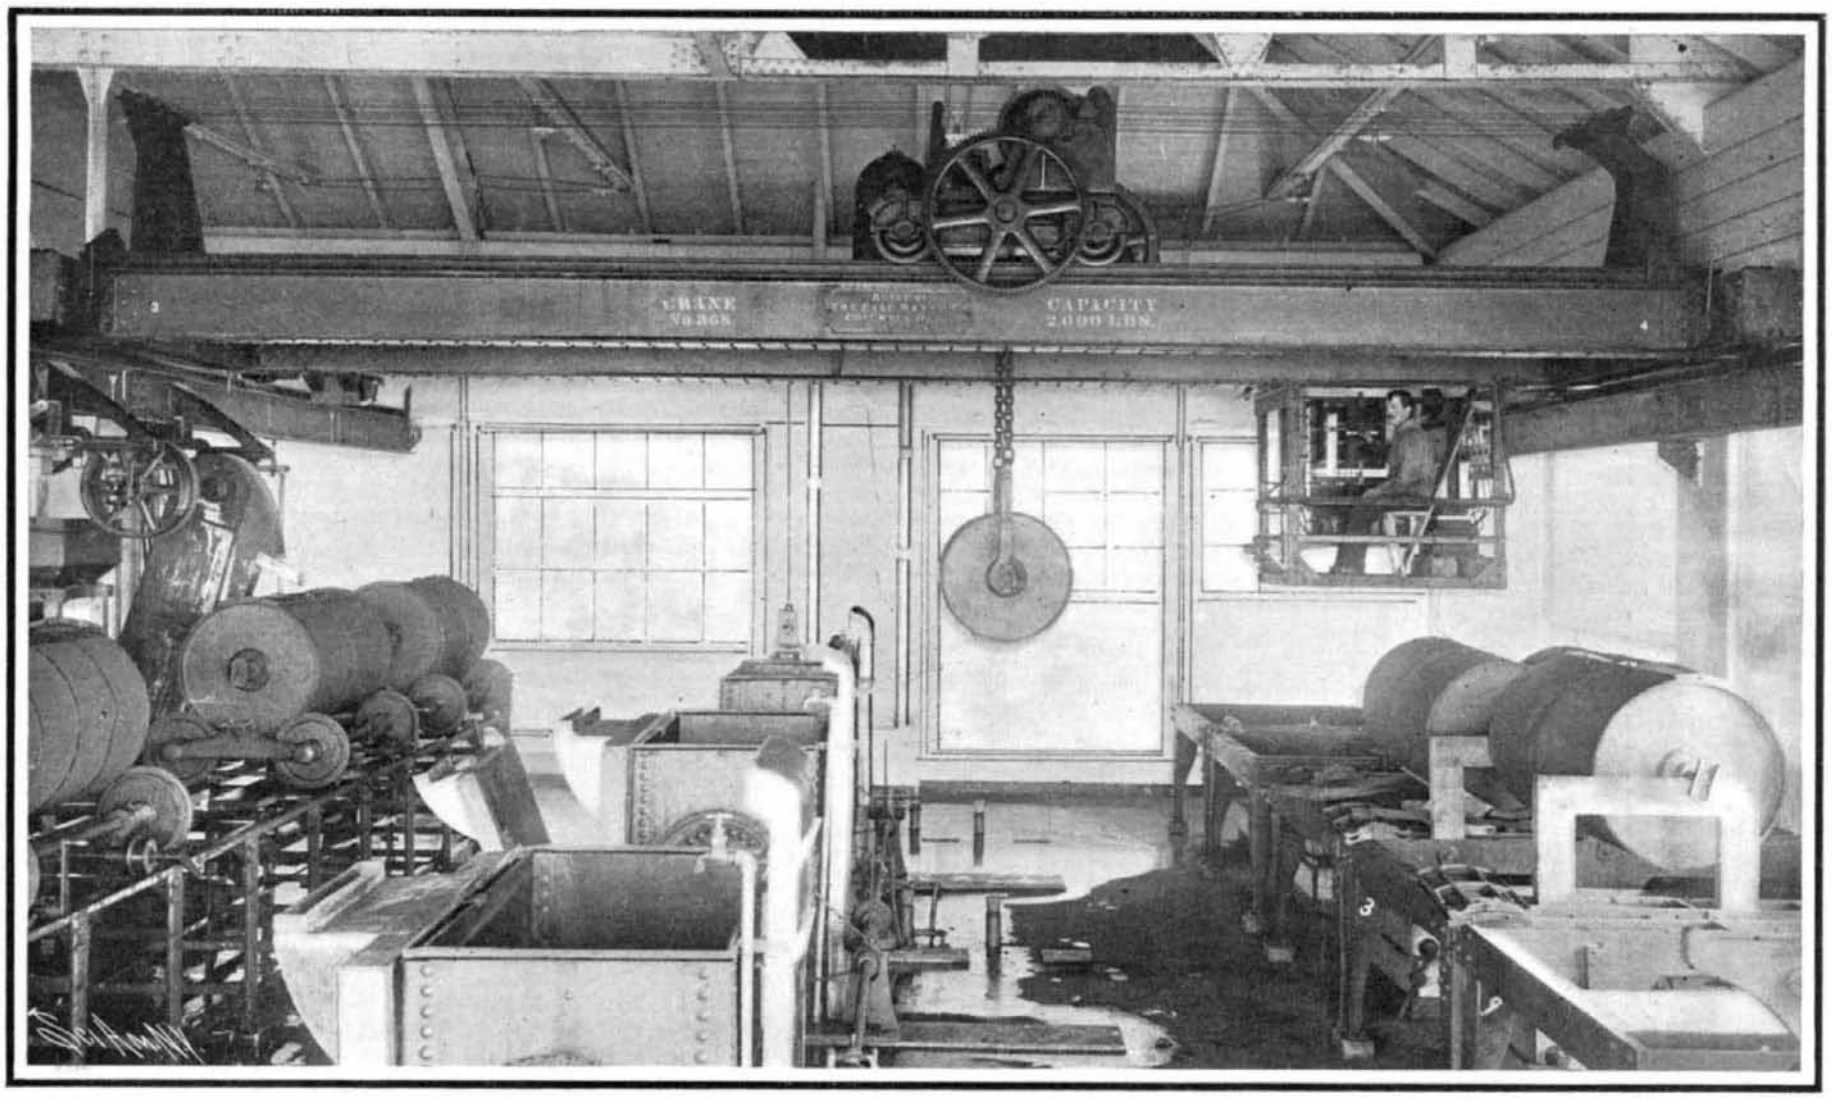

Cooking the Cleaned Grain by Steaming.

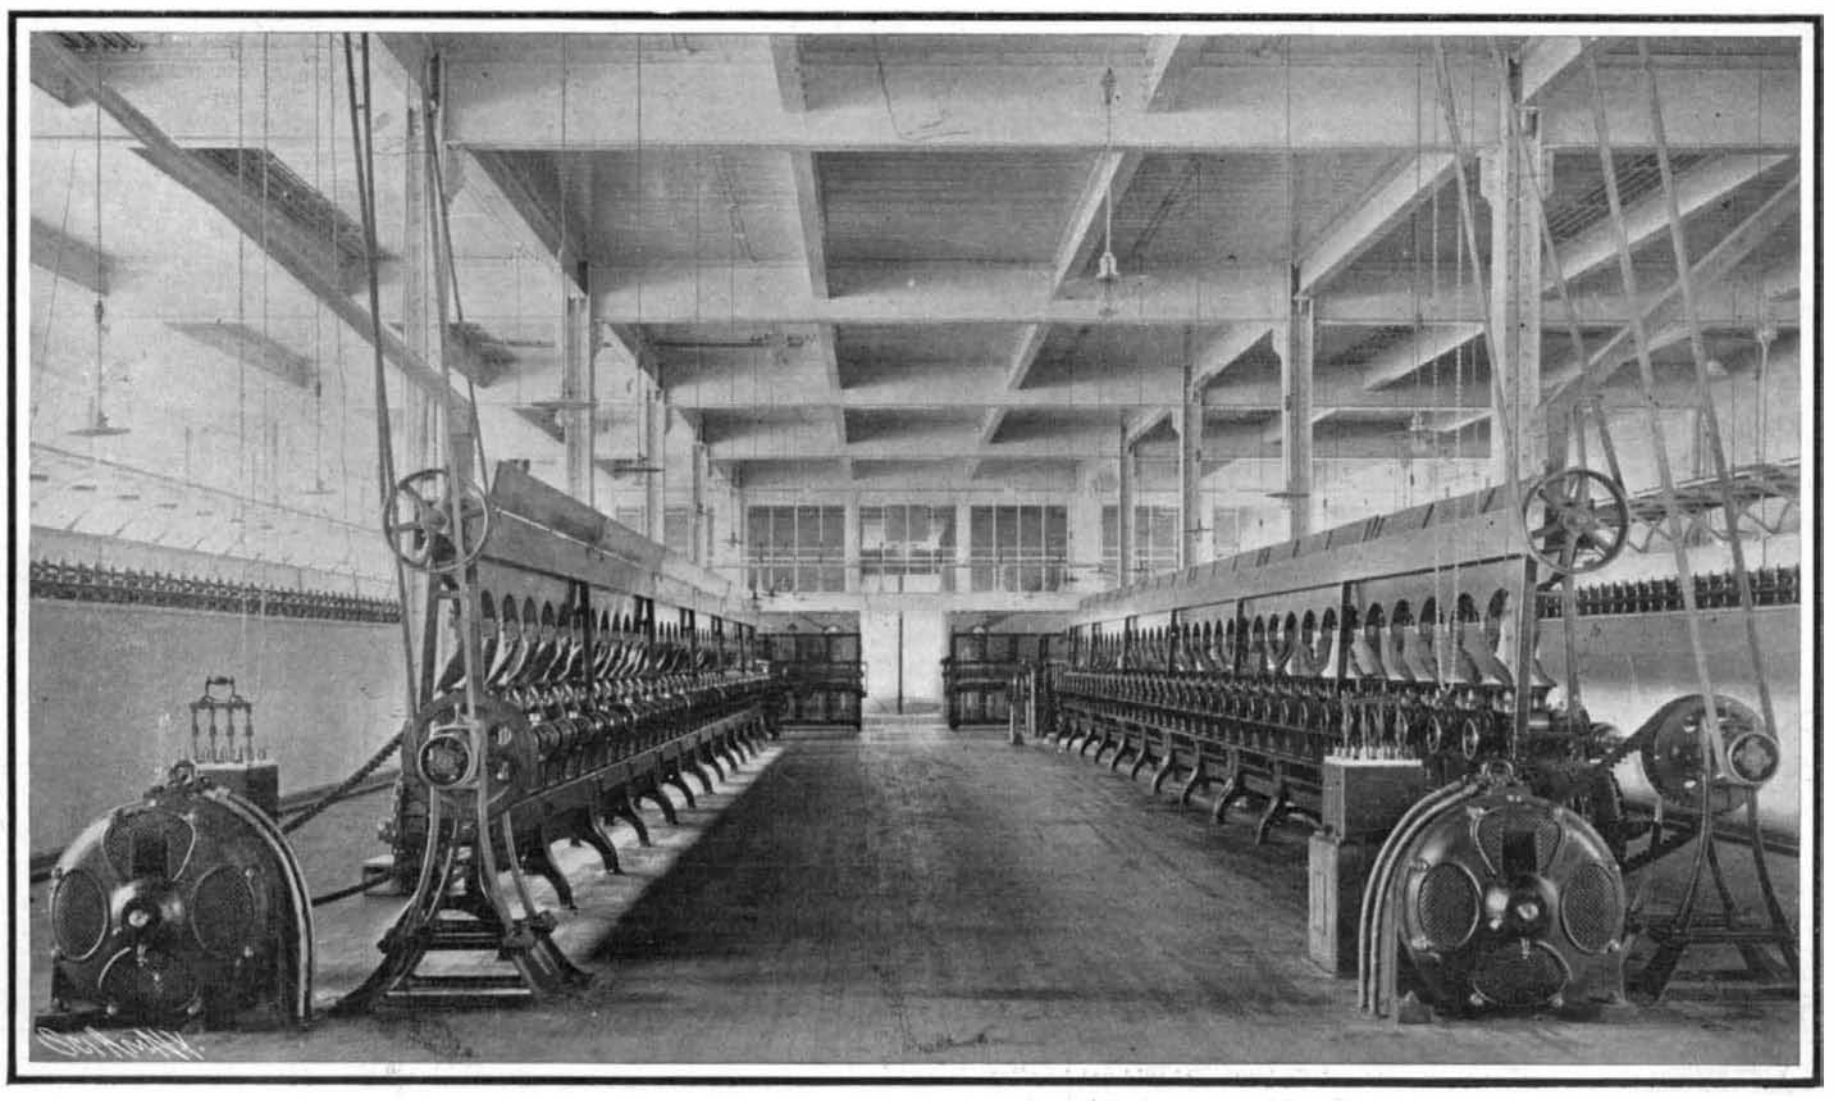

Shredding Machines Which, After the Steaming Process, Roll the Whole Wheat Kernel Into Shreds.

THE MANUFACTURE OF CEREAL FOODS WITH THE AID OF ELECTRICITY.—[See page 24.]

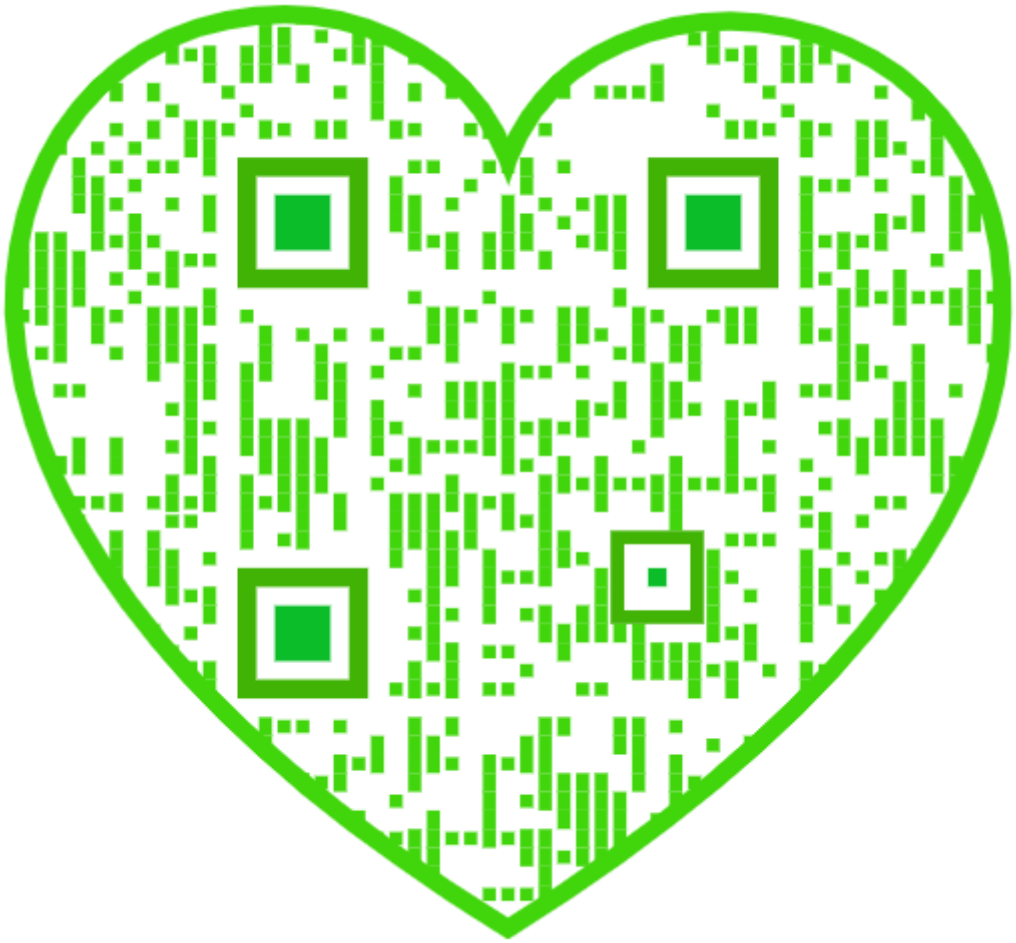

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) .....$3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
Scientific American Building Monthly (Established 1885)..... 2.50 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JULY 9, 1904.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

SANTOS-DUMONT AND THE EXPOSITION AUTHORITIES.

It is a pity that so soon after the opening of the St. Louis Exposition, so disagreeable an incident should have occurred as that attending the act of vandalism which has put M. Santos-Dumont's airship out of commission. The announcement about the airship was quickly followed by the offer of a reward of $1,000 by the St. Louis officials, for the apprehension of the miscreant who committed the deed. This certainly was a step in the right direction, and indicated the purpose and intention of the authorities to protect exhibitors and competitors who have made entries at the Exposition. This was followed, however, by a disagreeable surprise in the extraordinary report rendered by the Chief of Police, accusing Santos-Dumont of himself having committed the outrage. This is certainly adding insult to injury. Santos-Dumont is no mere showman. He is a Brazilian gentleman, who from early youth has been the victim of a passion for aeronautics. He has spent a large private fortune in indulging this taste. He has built, launched, and successfully operated some dozen aerial vessels of various types. His success in the field of aeronautics has been pronounced, and has brought to him much recognition from French and other aeronautical societies. It will be remembered that he was the successful competitor for the Deutsch prize of 100,000 francs, having sailed successfully around the Eiffel Tower and back to the point of departure. Santos-Dumont has been before the public eye in France and this country for many years. To accuse him of committing a crime such as that imputed to him, on the flimsy evidence which up to date has been placed before the public by the Chief of Police at St. Louis, would seem unworthy of serious consideration, were it not that it were placing not only doubt, but stigma, on the name of one to whom those interested in aeronautics are greatly indebted. There is every reason to believe that Santos-Dumont is considered as the most formidable competitor for the great prize of $100,000, offered by the St. Louis Exposition officials. Does it stand to reason that after he had spent many thousands of dollars in constructing the "Santos-Dumont No. 7" for the special purpose of competing for this prize, that he would deliberately commit hari-kiri? The two main accusations brought against Santos-Dumont by the Chief of Police are: First, that he brought the airship to St. Louis for exhibition purposes, and not for purposes of competition; secondly, that he has lost courage, owing to the many accidents during past years in experiments made about Paris, and he was endeavoring to escape the dangers attendant upon the competition. With regard to the first charge, it may be stated that Santos-Dumont is no charlatan, and that it is a well-known fact that he has sunk a large fortune in his aeronautical experiments. At the time that he won the Deutsch prize, it was said that he distributed the large sum of money he received among the poor of Paris.

The reflection upon his courage can not be taken very seriously. His many repeated feats of daring and his long record of successful experiments stand as sufficient refutation of an accusation which seems as unworthy as it is discourteous. The incident will no doubt produce as disagreeable an impression among those who are interested in fair play in France as in this country.

Should any serious delay follow the repairing of the injury to the airship, the authorities, it would seem, should surely afford this visitor at the Fair an opportunity of making good the harm done, and of entering the competition under as favorable conditions as before the disagreeable incident occurred.

MACHINE GRINDING.

Any one who has ever stood by the side of an iron-planing machine or lathe and watched it slowly slugging off, or what is worse, perhaps, if the job is a hurried one, see it tediously skimming the surface for a finishing cut, must have wished that there was either another way of doing the work, or that the machine could be speeded up to get along a little faster, no matter whether he was pecuniarily interested or not. It seems a great waste of time to do so little; other people think so too, and reduce the amount of stock to be removed to its lowest terms, which does not expedite the work in the least. It takes just as long, so far as the speed of the tool is concerned, to remove a sixty-fourth of an inch as it does to remove a quarter of an inch; quicker feed can be used on the finishing cut, certainly, but the loss of time is in the type of tool employed on the work. Matters have been expedited somewhat by the introduction of new tool steels of late, but there are some drawbacks to the use of them upon the equipment of machine shops generally, the old tools not having power enough to take the cuts that the steel will stand; if it is necessary to get a new outfit of machine tools to use a better steel, old shops will be handicapped for some time to come. The milling machine is the alternative of the planing machine on regular work, but it can not compete with the latter for jobs of all sorts that come to machine shops usually, and the cutters lock up a good deal of money. It comes to this, then, that we must subdue our enthusiasm and stick to the standard machines, or take a chance with still another agent, and that is the grinding machine, which has undoubtedly a future before it. Recent improvements in the capacity and range of the grinder render it available for both large and small work in manufacturing and repair work as well, from chilled rolls 12 inches in diameter down to a quarter-inch rod. If proper precautions in the management of the grinder be taken there is no tool that can compare with it in truth of surfaces, and persons who are skeptical as to this fact may quickly satisfy them by turning a shaft in a lathe, smoking it in any way, and then putting the shaft in a grinding machine; the irregularities left by the lathe tool show in a most surprising manner. The first grinding machine was undoubtedly a grindstone, and even that is no mean adjunct now to finishing metals in the hands of skilled workmen. I have seen gun barrels "turned" on grindstones by merely screwing a dog on one end by which to handle them—which would caliper remarkably well as to rotundity and size. Cutlery never sees any other tool than grinding machines of one sort or another. As regards accuracy of surface and dimensions the machine grinder will do splendid work in the hands of those who know how to run it. Rolls for certain purposes have to be as nearly perfect as human hands can make them, and it is wholly within possibility to grind a pair of rolls, superpose them with slips of the thinnest tissue paper between and have the rolls "bite" them everywhere; not one can be withdrawn without breaking it. This comes pretty near absolute accuracy. But grinding machines have peculiarities of action which it is necessary to know before undertaking their use. Abrasion causes heat; if this is even sensible heat, perceptible to the touch, there will be a change of dimension in the work caused by expansion in different parts. On the start the shaft, or whatever the job may be, is cold, but as the emery wheel traverses the heat increases and the shaft gets larger, so that by the time the surface is finished there are various dimensions when the metal is cool again.

A great variety of work can be done on the grinding machines already in market, but for the average small machine shop all over the country the cost of these tools is prohibitive. They are finely fitted up with every appliance for adjustment at certain angles and for plane and parallel work besides; but certain specific classes of work can be done by very simple machines. Take the case of lathe handles, for instance. The whole of the surface on them can be skinned over, so to speak, from the drop-forging by an emery wheel, the machine to which it is attached having formers conveniently fastened to the carriage, so that ordinarily intelligent boys or handy men can run them. Aside from this detail, which is only mentioned as an example, there are quantities of other jobs, particularly in mechanics' and carpenters' tool shops, which can be executed on a simple tool which could be sold at a low price.

Joseph Horner, an English mechanical engineer and tool-maker, has paid much attention to the grinding machine, and gives some points in Engineering which are worth noting. An objection to the method itself has been made by some who urge that the natural wear of an emery wheel would militate against accuracy of dimension, but Mr. Horner says, on this head, that mistaken notions exist as to the amount of wear of wheels. Under certain conditions wheels will show wear during long roughing cuts; this will happen if the work is speeded too high and the wheel is forced too hard. It will also occur if the wheel is too soft, but with proper management these things should not be allowed. A wheel should not show wear even in a long roughing cut and none whatever in a finishing cut. The wear is controllable to such an extent that it should not be noticeable in doing a large number of pieces of the same kind. One surface speed should not be used upon all kinds of work. Neither is one kind of wheel suitable for all classes of jobs at different speeds; this can be done, but it is not wise to undertake to cut iron, steel, and brass on the same wheel, for the time spent in changing wheels is more than made up by the better work done when the whee' is suited to the task in hand. Even on the same material the wheel may need to be hard or soft according to the character of the work to be done, either slow or fast cutting as exigencies may demand, and, in some cases, depending upon whether the machine itself is light or heavy; uniform speeds are not adhered to any more than on lathe work. Specifically the speed of the work should not exceed in revolutions from 10 to 40 feet per minute; 100 feet and over is too fast. The grinding machine is in its unappreciated stage, and has yet to obtain its proper place in machine shops.

It is asserted by a manufacturer of emery wheels that it is possible to remove one cubic inch of steel per minute from cylindrical work with proper wheels, and this is by no means the limit of capacity. The Brown & Sharpe Company illustrate the difference between turning in a lathe and grinding with an emery wheel by the fact that in the latter there are, approximately, 2,500,000 cutting points on a wheel 18 inches diameter by ¾ inch face which pass over from 1 to 4 square feet of surface per minute, while a lathe has but one cutting tool at less speed superficially in a given time.

The practice at present is to rough-turn shafts before grinding them, the allowance for the latter operation being a full sixty-fourth of one inch; sometimes a finishing cut is taken in the lathe, but this is a waste of time and does not give so good results, because the temperature is less likely to rise on a rough surface than upon a smooth one. Rough-turning work for a grinding machine should be done with coarse feed, the coarser the better, within reason, for under these conditions the grinder does its best work. The important point is to rough-turn liberally, and grind lightly, never the reverse of these processes.

THE PROGRESS OF MOSQUITO EXTERMINATION.

It having been demonstrated by many physicians and scientific men that certain species of mosquitoes facilitate the transmission of malaria and fevers from affected communities to those not affected, it follows that the only remedy is to prevent the production of the pest. The method most effective is the drainage of swamps or meadows to avoid standing pools of water; the results obtained in this way have been highly encouraging. Many desirable towns, presenting most attractive locations for residences, have acquired such reputation for having malaria and mosquitos that their development has been greatly retarded. It is to show how easily and with what small comparative expense these depressing conditions can be reversed and improved, that the National Mosquito Extermination Society was organized in this city last winter. The report of the society has recently been published, and contains many useful suggestions as to the best methods to be pursued to prevent the breeding of the mosquito. The society is desirous of enlisting in its membership all persons interested in promoting the general subject, and wishes to secure information from all parts of the country, later to be published in its annual report. As previously remarked, one of the most extensive plans for ridding a locality of mosquitoes is by a thorough drainage of meadows or swamps.

This is now recommended for the great meadows lying east of the city of Newark, N. J., covering a tract about eighteen miles long by four miles wide, or about 27,000 acres. The New Jersey State Geologist and two of his scientific associates have made a report urging the draining and filling of the Newark meadows as the only means of ridding the regions of the mosquito pest.

The report states that the agricultural value of the lands to be redeemed and cultivated would ultimately repay the cost. But the good effect on the surrounding cities and suburban towns in preventing the spread of malaria, thereby promoting the public health, is a greater reason why public aid should be demanded in co-operation with private enterprise or subscription for the prosecution of the work.

Work will have to be begun, no doubt, as that on Long Island was, at the expense of public-spirited citizens who are willing to risk money to prove in a practical way the extermination of the mosquito. It requires co-operation from so many sources that all that private citizens can do by organization and all that the cities can be induced to do in the way of appropriation will need to be combined in order to work on a territory large enough to make the demonstration convincing. It will be an excellent plan for village or town improvement associations in mosquito localities to discuss in public meetings the necessity of eliminating the mosquito pest, urging co-operation with adjoining localities, and show by maps and plans what can be done to secure permanent and lasting improvement. Ultimately, city and State aid can be secured to

assist the work, much on the same plan as State aid is now given in road building.

That the importance of the mosquito is truly understood as regards its relation to the public health in the Panama Canal territory is shown by the appointment of Dr. William C. Gorgas, Assistant Surgeon-General, U. S. A., who has instructions to provide drainage for swamps and all mosquito-breeding places in that district. He is now in Panama for that purpose.

The board of health of the village of Lyons, N. Y., has recently adopted a new rule, requiring that all open barrels, casks, or cisterns containing water shall be covered with mosquito netting, to prevent the escape of any mosquitoes breeding on the surface.

Under the right conditions it is astonishing what a large quantity of mosquitoes will develop and breed from a small amount of water.

There are localities under our own observation which have been free from mosquitoes for six years past, which for many years were unbearable to live in in hot weather, all due to the elimination of stagnant pools by simple drainage.

The extermination of the mosquito is a question of growing importance, and we hope will receive general attention among the various States and Territories of this country. The remarkable progress made in Havana, Cuba, in this direction in the prevention of yellow fever by protection from mosquitoes is a notable example of improvement resulting from hygienic scientific investigation.

A VEGETABLE BUTTER.

Our delicious table butter made supposedly from the cream obtained from cow's or goat's milk, besides having a dangerous competitor in oleomargarine, is menaced anew by a substitute no less formidable in character; this is an exotic product—the butter, in fact, extracted from the meat of the cocoanut. This must not be confounded with cacao butter, which, though sounding very similar to cocoa butter, is nevertheless prepared from an entirely different nut and used for quite other purposes.

The cocoanut tree, that most providential growth of the tropics, produces, without cultivation, a nut with which we are all familiar. Contained within its hair-covered and ovoid shell is a most delicious milk, a cooling draft which quenches the thirst of the way-worn and jaded traveler and refreshes the tired laborer. Science has made the important discovery, too, that its meat, of which there is always a generous supply, when dried and pressed furnishes a whitish substance which solidifies at 20 deg. C., but above this temperature runs into a yellow and translucid oil. The annual importations of cocoa-oils coming from India and Africa are considerable. The better grades are drawn from Cochin China, the island of Ceylon, from Australia, and from Karri-Kall, well down near the end of the Kara peninsula. These various commercial grades are obtained by pressing—first cold, then warm—the pulp extracted from the nut which has been previously divested of its shell.

This nut produces 60 per cent of oil, and the cocoanuts collected upon a hectare of land (a fraction over 2 acres) planted to these trees will yield an annual production of 800 kilogrammes of oil which readily oxidizes or becomes rancid, recalling, by its taste, the fruit from which it is derived. Till now this oil has had no other industrial use than furnishing the fats for soap or oil for the lubrication of machinery, the better sorts being employed in the preparation of textiles.

Under the name of "copra" the meat of this cocoanut comes to our shores and is here employed in the manufacture of this industrial oil, the residuum, in the form of a press cake, being fed to cattle to fatten them. According to a French publication, it is in France that this cocoanut oil is subjected to special treatment, from which it emerges to become the formidable rival above indicated of our cherished butter made from cow's milk.

A German chemist of prominence, Dr. Heuner, proposes to buy up all the cocoanut oils and to transform them into a succulent, savory, inodorous product which is soluble in ether and possesses no acid reaction; to this product he announces his intention of giving the name "vegetable butter."

Of all the vegetable oils, that extracted from the cocoanut is the one of which the composition approaches more nearly to the butter made from milk.

Like true butter, it contains 7 per cent of soluble acids, which are not found in such considerable proportion in any other fat. These are butyric acid, capric or decylic acid, which give to our table butter its pleasant aroma and a very pronounced taste of the hazelnut.

Moreover, cocoa butter contains from 25 to 30 times less water than true butter. It will keep 15 or 20 days without showing any acid reaction, and from this fact seems to offer a real superiority over animal butter for use in the preparations of dry pastry, biscuits, and such like.

The process advocated by Dr. Heuner for the treatment of cocoanut oils and from them thereby to obtain a butter in every way adapted for food is that which Dr. Schlink has already put into practice. It consists simply in relieving these oils of their fatty, volatile, and odorous acids, as well as of their other aromatic principles, by means of alcohol and bone-black. After this treatment the product obtained has the appearance of a whitish mass of the consistency of ordinary butter, possessing a sweet savor; it melts at 25 deg. C. and shows the following component parts:

Fatty matter	99.632 per cent
Mineral matter	0.011 per cent
Water	0.357 per cent

The price of cocoa butter, we are informed, is about 1 franc 60 centimes a kilogramme, something over two pounds, and is much lower than that of butter made from cream; moreover, since it contains little or no water, less of it would be required by weight, and, because of its slowness of oxidizing, confectioners and bakers would find it to their advantage to use it for cakes, pies, and other things in their lines, because they would not get stale and unmarketable so quickly.

From the standpoint of hygiene it may be well to remember that butter made from milk occupies the first rank among substances which are most favorable to the culture of microbes and of the worst ferments, while cocoa butter, on the contrary, seems to be an antiseptic medium very improperly qualified for the dissemination and propagation of bacteria. In this respect, comparative experiments made upon both of these substances have given results which do not admit of doubt as to which is the better antiseptic.

Finally, experiments upon the artificial digestion of this form of butter, carried out in the Central Hospital of Vienna, have given equally gratifying results and been confirmed later by other experiments in the different hospitals of Switzerland.

While it has not yet been satisfactorily demonstrated that cocoanut oil can furnish a butter capable of supplanting the delicious products of the dairies of Isigny and Brittany, it is, however, significant that the various boards of health have not raised their veto against the human consumption of this new product; which, let us hope, will not lend itself, like oleomargarine, to the fraudulent adulterations which defy the keen understanding of the chemist.—Translated from Science, Arts, Nature.

HISTORIC FOREST FIRES.

When all the conditions are favorable, forest fires sometimes reach gigantic proportions. A few such fires have attained historic importance. One of these is the Miramichi fire of 1825. It began its greatest destruction about 1 o'clock in the afternoon of October 7 at a place about 60 miles above the town of Newcastle, on the Miramichi River in New Brunswick. Before 10 o'clock at night it was 20 miles below Newcastle. In nine hours it had destroyed a belt of forest 80 miles long and 25 miles wide. Over more than two and a half million acres almost every living thing was killed. Even the fish were afterward found dead in heaps along the river banks. Five hundred and ninety buildings were burned, and a number of towns, including Newcastle, Chatham, and Douglastown, were destroyed. One hundred and sixty persons perished, and nearly a thousand head of stock. The loss from the Miramichi fire is estimated at $300,000, not including the value of the timber.

In the majority of such forest fires as this the destruction of the timber is a more serious loss by far than that of the cattle and buildings, for it carries with it the impoverishment of a whole region for tens or even hundreds of years afterward. The loss of the stumpage value of the timber at the time of the fire is but a small part of the damage to the neighborhood. The wages that would have been earned in lumbering, added to the value of the produce that would have been purchased to supply the lumber camps and the taxes that would have been devoted to roads and other public improvements, furnish a much truer measure of how much, sooner or later, it costs a region when its forests are destroyed by fire.

The Peshtigo fire of October, 1871, was still more severe than the Miramichi. It covered an area of over 2,000 square miles in Wisconsin, and involved a loss in timber and other property of many millions of dollars. Between 1,200 and 1,500 persons perished, including nearly half the population of Peshtigo, at that time a town of 2,000 inhabitants. Other fires of about the same time were most destructive in Michigan. A strip about 40 miles wide and 180 miles long, extending across the central part of the State from Lake Michigan to Lake Huron, was devastated. The estimated loss in timber was about 4,000,000,000 feet board measure, and in money over $10,000,000. Several hundred persons perished.

In the early part of September, 1881, great fires covered more than 1,800 square miles in various parts of Michigan. The estimated loss in property, in addition to many hundred thousand acres of valuable timber, was more than $2,300,000. Over 5,000 persons were made destitute, and the number of lives lost is variously estimated at from 150 to 500.

The most destructive fire of more recent years was that which started near Hinckley, Minn., September 1, 1894. While the area burned over was less than in some other great fires, the loss of life and property was very heavy. Hinckley and six other towns were destroyed, about 500 lives were lost, more than 2,000 persons were left destitute, and the estimated loss in property of various kinds was $25,000,000. Except for the heroic conduct of locomotive engineers and other railroad men, the loss of life would have been far greater.

This fire was all the more deplorable because it was wholly unnecessary. For many days before the high wind came and drove it into uncontrollable fury, it was burning slowly close to the town of Hinckley and could have been put out.—Gifford Pinchot in Farmers' Bulletin.

SCIENCE NOTES.

It is not a pleasant thought that the brilliant white note paper which your hand rests upon may have in it the fibers from the filthy garment of some Egyptian fellah after it has passed through all the stages of decay until it is saved by a ragpicker from the gutter of an Egyptian town; and yet it is fact that hundreds of tons of Egyptian rags are exported every year into America to supply our paper mills. At Mannheim on the Rhine the American importers have their ragpicking houses where the rags are collected from all over Europe, the disease-infected Levant not excepted, and where women and children, too poor to earn a better living, work day after day, with wet sponges tied over their mouths, sorting these filthy scraps for shipment to New York. Our best papers are made of these rags and our common ones of wood pulp, which is obtained by grinding and macerating huge blocks from some of our soft-wooded forest trees.—David G. Fairchild in the National Geographic Magazine.

Major James Harrison has just returned to England after a prolonged journey through the dense forests of Central Africa, during the course of which he saw the okapi in its natural habitat. Major Harrison penetrated the Stanley Forest to the region peopled by the pygmies, in search of this animal. His efforts in this country were, however, not successful, so he directed his way to Jabir, and thence into the great forest of De Melley. This forest is particularly dense, the trees being thickly interwoven with dense creepers and tangled undergrowth; in fact, it could only be penetrated by crawling on the hands and knees, a most difficult and arduous operation. On the sixth day after he had entered this forest, his party encountered the spoor of the okapi. This was followed for several hours, when suddenly the party came upon the animal some fifteen feet in front of them. The animal was startled by their approach, and before the major could obtain his rifle from one of the natives accompanying him, the animal had darted into the thick undergrowth. The view that the hunter obtained, however, was sufficiently long to enable him to observe its general characteristics. The animal stood between ten and eleven feet in height, was of a general tawny color about its body, and was striped over the loins. The truth of Major Harrison's story is vouched for by the natives and pygmies who accompanied him on the expedition, and they say he is the first white man who has seen the animal in its native wilds.

An expedition is being organized in Great Britain for the exploration of those regions of British Northern Nigeria Protectorate situate nearest the western shore of Lake Chad. The object of the expedition is to survey and investigate thoroughly, and to gather some zoological knowledge indigenous to the country traversed. Some three months will be spent at a place called Tonga on the Gongola River, one of the northern tributaries of the Benue, which is conveniently situated for exploring the provinces of Southern Bornu and Bauchi. The expedition is equipped with two steel flat-bottomed shallow-draft boats. These have been built in sections for easy transit to Africa, and will there be reassembled. They have been provided to facilitate navigation of the shallower rivers, and will prove of great assistance in both the survey work and the collection of zoological specimens. After completing all the work that can be accomplished from the Tonga base, the expedition will move northward into the basin of the Koma-Lugu River, where a considerable area of little-known country will be mapped and explored. Proceeding down the river to Lake Chad, Kuka will be reached. Thence it is hoped that the party will be able to proceed to the German and French spheres of influence on the southern shores of the lake, and the return journey will probably be made by way of Shari and Logone Rivers, past Lake Triburi, to the Kebbi, which is a tributary of the Benue.

THE PREPARATION OF CEREAL FOODS.

By a cereal food we are to understand a preparation of grain by which its natural properties may be conserved or enhanced by proper treatment to render it more adapted for human needs. The original cereal food was oatmeal, which has been used for centuries by the Scotch, and Sir John Froissart describes a large bag of ground oats, which every horseman carried on his saddle, and the metal plate used to prepare the coarse but not unwholesome meal. As methods improved, the product improved, until at last we had an excellent article, which began to be called a "breakfast" food. Then experimenters devised new ways of treating not only oats, but wheat and other grains as well, and soon these articles began to form an appreciable item in the total output of breadstuffs. Having described the great wheat fields of the West, their cultivation and the garnering of the grain and the manufacture of white flour, we come to the consideration of cereal foods, where the grain is treated so as to preserve the original qualities, and at the same time render it more digestible by a process of cooking and filamenting, or shredding, by which an article is produced which at first sight seems to be a form of macaroni woven into oblong shape and baked. The composition of a grain of wheat is much more complex than is generally supposed, each of its several layers and properties having a definite purpose for its being, and all of which are necessary for the perfect nourishment of mankind. The wheat kernel, even though ground and left as a whole, if without preliminary treatment, produces a flour which the human system finds difficult to assimilate. However, in the process to which we refer, the entire wheat kernel receives a peculiar treatment previous to shredding, which tends to break down the cellulose structure, and so change the starchy properties as to make the entire berry easily and naturally digested and assimilated, and this without the addition of a single foreign substance, which when used robs the bodily functions of their intended and much-needed exercise.

There is located at Niagara Falls, N. Y., a most interesting plant operated entirely by electricity, and, in fact, a large part of the product is baked by electricity generated by water from the adjacent Niagara River. The plant of the Natural Food Company is termed a "conservatory," and the name is particularly appropriate, when it is stated that the eight hundred and forty-four windows contain thirty thousand lights of glass. The building presents the appearance of having glass walls, through which streams an abundance of sunlight, making artificial light necessary only on the darkest days. Every evening, however, the electric lights are turned on, thanks to the never-failing power of Niagara, and the effect is so remarkable that it is not inaptly called "A Castle of Light." The products, which, by the bye, are far from being limited to a breakfast food, are two varieties having a common base. First, the thick, oblong cakes made of elongated shreds of wheat and termed "Shredded Wheat Biscuit;" and second, a flat, crisp cracker called "Triscuit." The system of baking these crackers, which is done by electricity, while in rapid motion along an electric carrier belt, is particularly interesting, as it is the first use made of the electrical current in commercial baking, and we have been able to secure photographs of this unique mechanism.

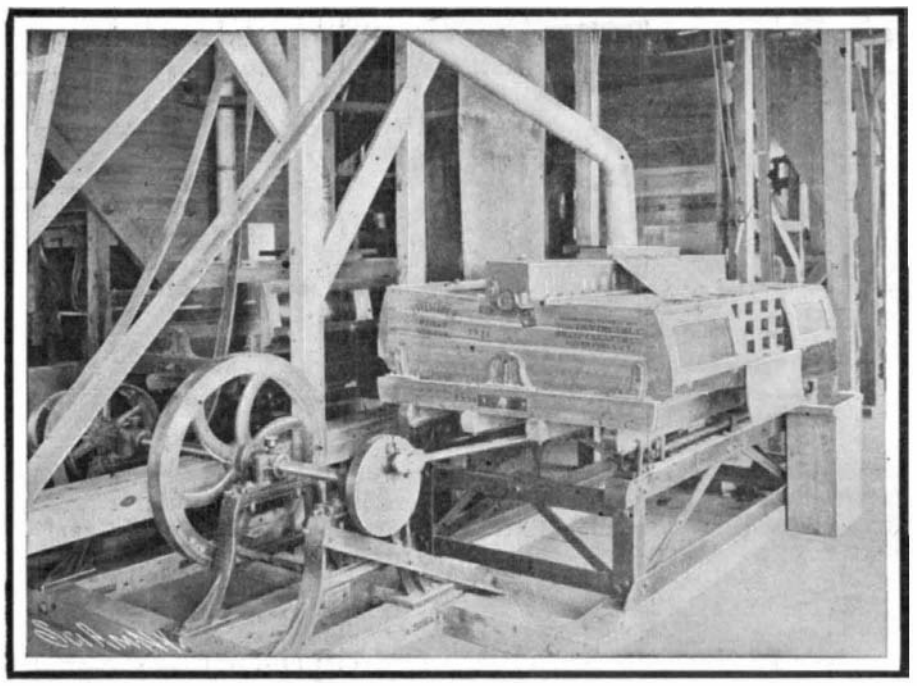

Stoner for Removing Cockle and Other Foreign Substances from the Wheat.

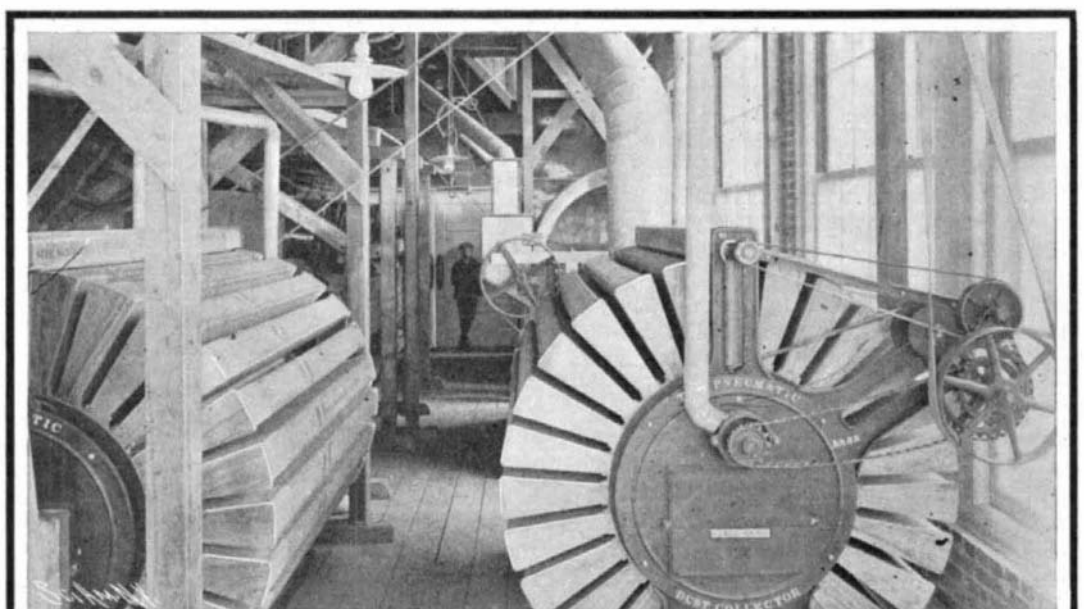

Dust Collectors in Which the Air Used in Cleaning the Wheat is Purified.

The building proper is of large size, being 463 feet long with additional sections, the total floor area being about five and one-half acres. It is built of light-colored brick, which helps to emphasize the gospel of cleanliness, which is preached in a practical manner in this plant. The construction admits of a great abundance of light, but not air; for the central tower is the only air inlet in the building, large fans serving to change the air every few minutes in all departments. This system enables the air not only to be filtered, but to be kept cool in summer and warm in winter without the danger of drafts which might jeopardize the health of the employes. To insure the integrity of this air-lock, as it were, the windows are double-glazed. Being situated in the most beautiful residence section of the city, the company, it seems, does not desire to establish direct railway connections, the wheat and finished products now being conveyed to the cars in specially constructed steel wagons, though a tunnel connecting the conservatory and the main line of the railroad is one of the possibilities.

The grain, when it reaches the building, is elevated to the top story and is automatically weighed. It then descends from story to story until as a food it leaves the lower one packed in cartons in boxes. All grain is more or less dirty; there is dust, little bits of binder wire, the "beard" of the kernel, and more or less cockle. To remove these impurities, the best practice of the miller and maltster is employed. Seeders which resemble an inclosed sieve remove the cockle, magnetic separators take out the iron, and strong air currents remove the dust, which in turn is mechanically taken from the air, and thus not being allowed to circulate in the room. These curious-looking machines never fail to impress the visitor. The grain is then washed in sterilized

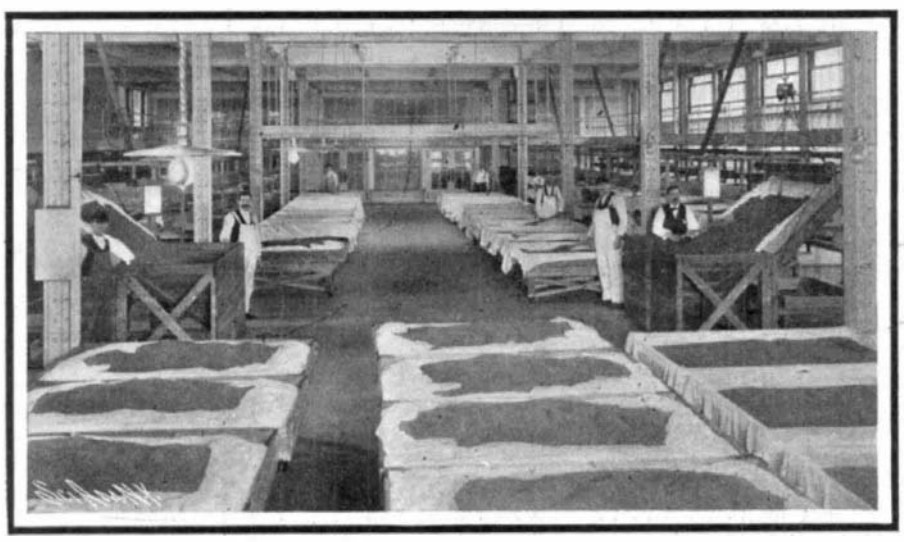

Drying the Thoroughly Cleaned and Cooked Grain Before Shredding.

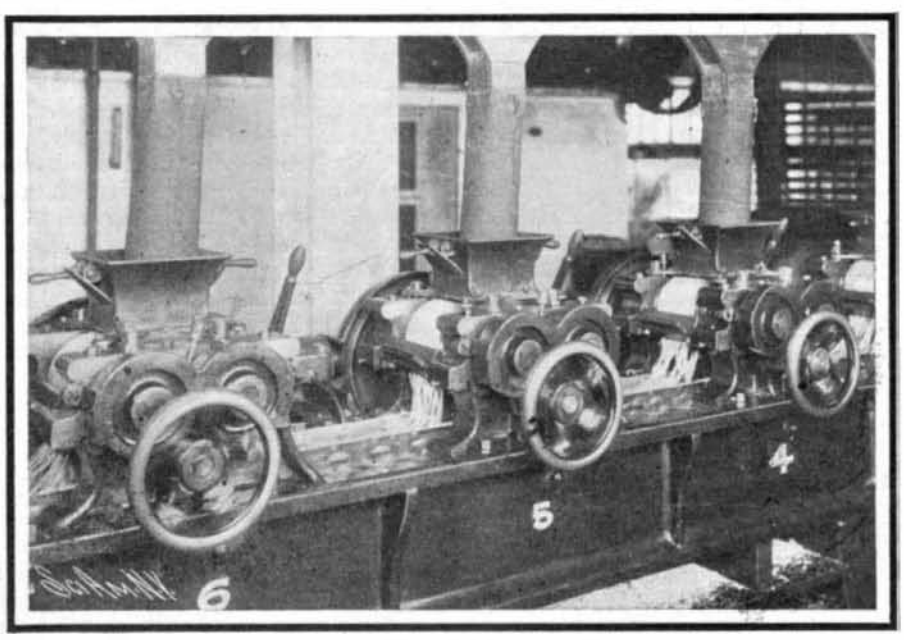

A Battery of Shredding Rolls.

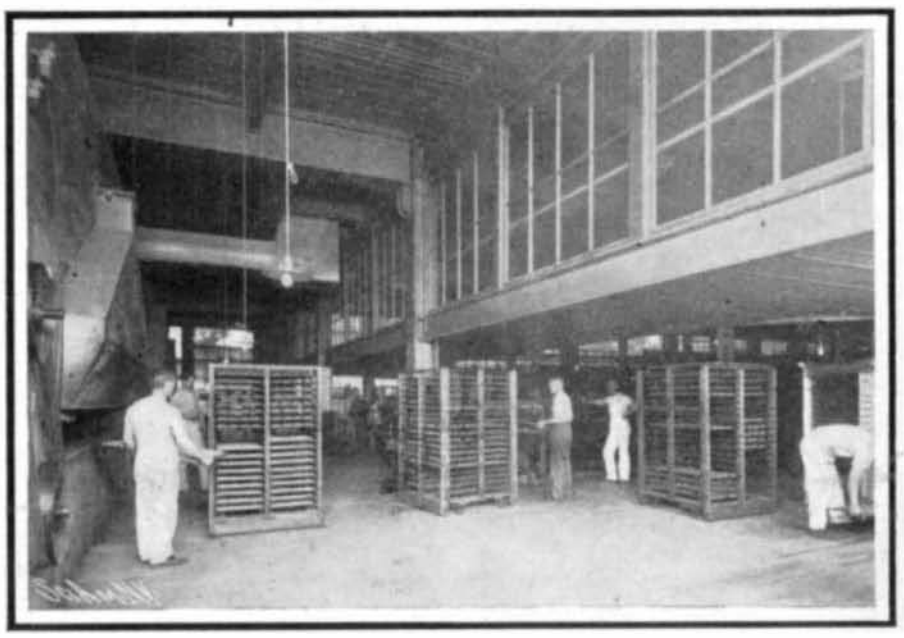

Ovens, Transfer Racks and Ends of Evaporators.

THE MANUFACTURE OF CEREAL FOODS WITH THE AID OF ELECTRICITY.

water, and is then cooked for thirty minutes by live steam, the kernels being contained in cylindrical wire sieves. Any organisms which might have adhered to the grain are destroyed. The swelled kernels are now softened to such an extent that if the shredding process were begun, they would be reduced to a pulp. It is therefore necessary to dry or cure the grain, so that the kernels will lose some of their moisture, and become rigid enough to stand the subsequent process of shredding. For this purpose the grain is spread on clean cloths, and is exposed to cool air for twenty-four hours. The kernels are turned from time to time with paddles, for they are not touched by hand at any stage of the process of manufacture, although the finished product is necessarily put into paper cartons by hand. Conveyors take the ripe berries to the floor below, where they are fed into the hoppers of the great shredding machines, each 88 feet long and actuated by a 40-horse-power motor. The shredding machines consist of 36 pairs of rollers, and a cutting and panning device. The rolls consist of a steel roller having lines or corrugations cut upon the surface; this roller antagonizes a smooth roller, and the wheat kernel is caught between the two and rolled out into a long shred, which drops upon an endless belt. Shredder No. 1 delivers one layer, shredder No. 2 the second layer, and so on, until at the end of the thirty-sixth shredder there is a corresponding number of layers. This long band of white filaments is now brought by the endless belt to the cutting device, which separates it into oblong cakes of the proper size, presses them, and finally drops them onto an automatically-advanced pan holding 48 biscuits. When the latter is filled, it is taken to a large oven consisting of a drum carrying pan-holders suspended, so that the pan will be horizontal at all times, irrespective of the rotary motion of the drum—very much like the cars in a Ferris wheel. This drum is inclosed in brick walls, so as to form an oven. The biscuits are thus kept constantly in a moving current of hot air, until to all external appearance they are done; but as in reality they have an underdone core, they are transferred to an oven of different type, where they remain for a longer period and in which the baking process is completed. The time required for cooking is thirty minutes, in addition to which the first oven bakes the biscuits for thirty minutes, and the second oven for one and one-half hours, consequently two and one-half hours are occupied in processes for rendering the wheat easily digested and assimilated.

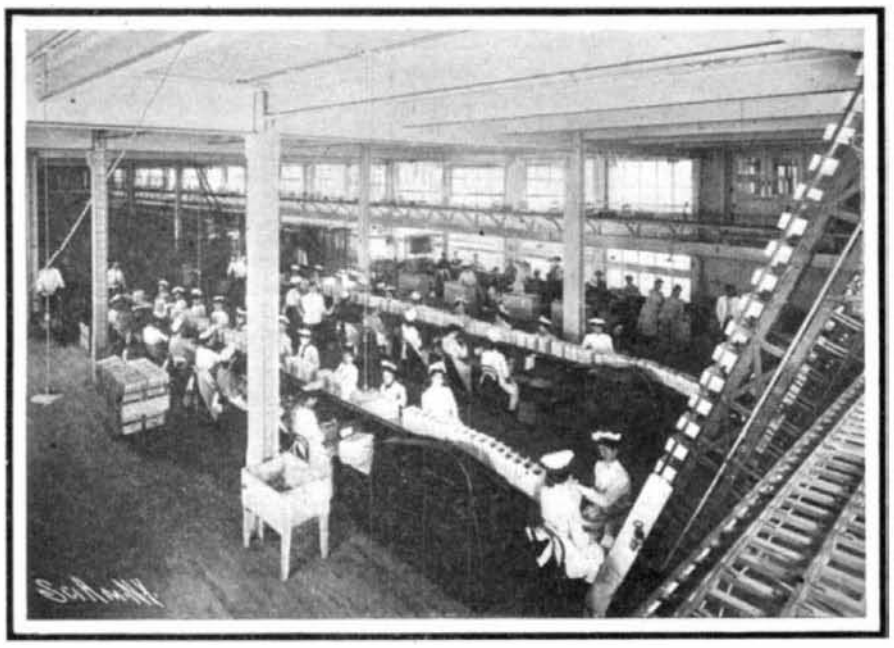

Packing Tables and Endless Carrier.

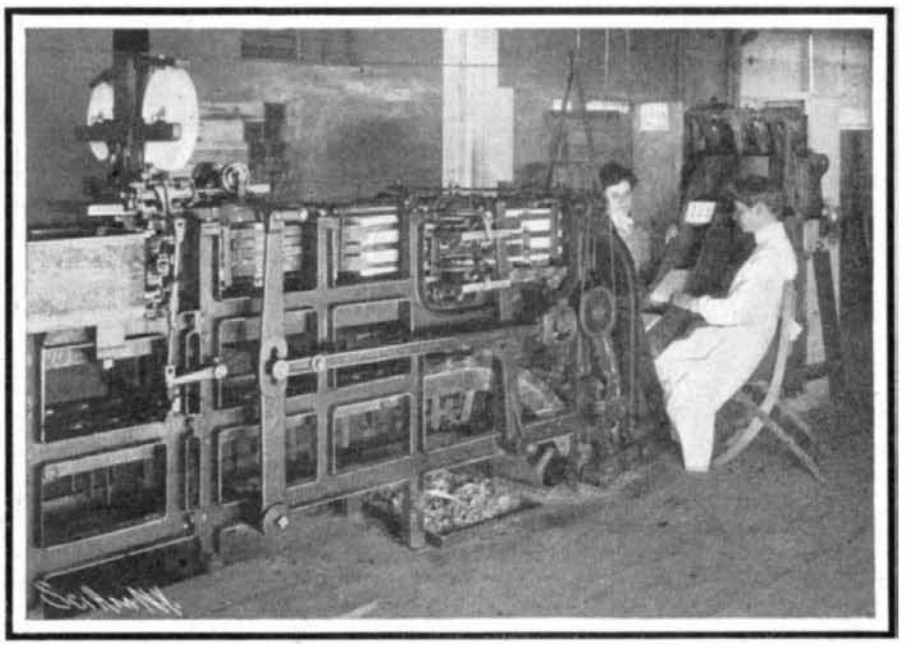

Where the Packages are Automatically Sealed.

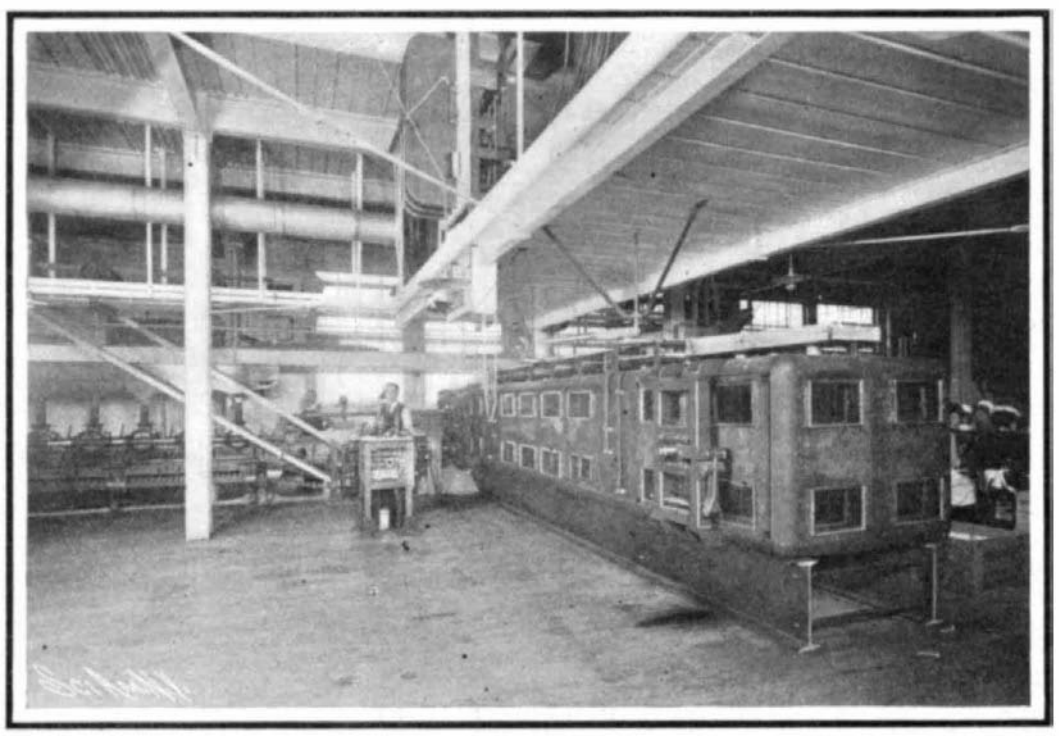

End of Shredding Machine and One of the New Electric Ovens.

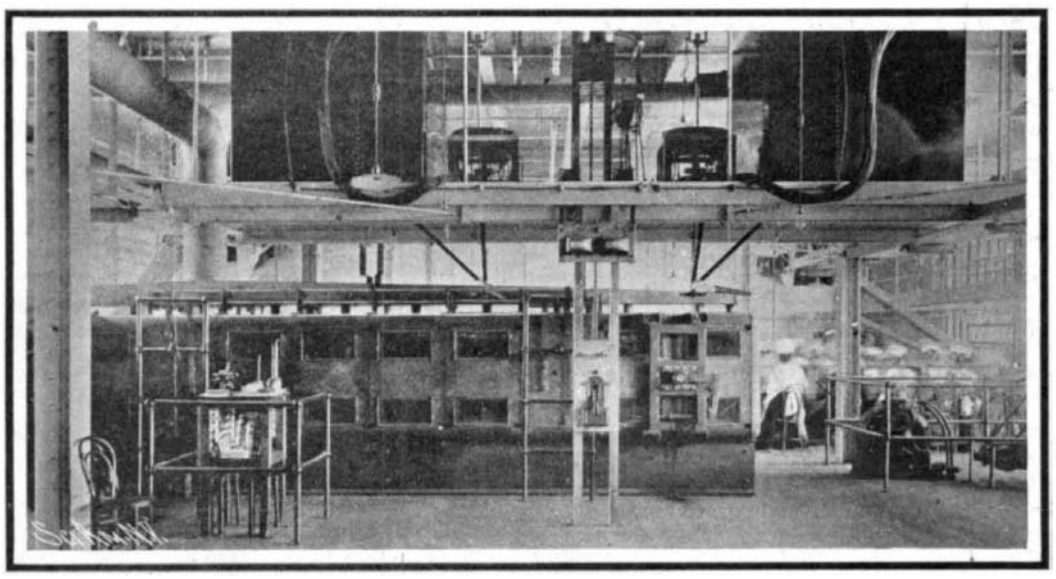

Electrically-Heated Mold.

The biscuits are now taken on the pans and put on racks, which are wheeled to the packing table, where girls, attired in spotless white aprons and caps, place them in cardboard packages or cartons, each holding twelve. These packages are then placed on an endless belt which carries them to a machine almost human in its operation. This machine turns back the flaps, glues them, pastes a strip of paper over the joint, and the endless belts pressing on the package as it passes through this long machine allow the glue to fairly set. Following this the cartons are packed in large wooden cases, which, too, are made by machinery, and the product is ready for shipment.

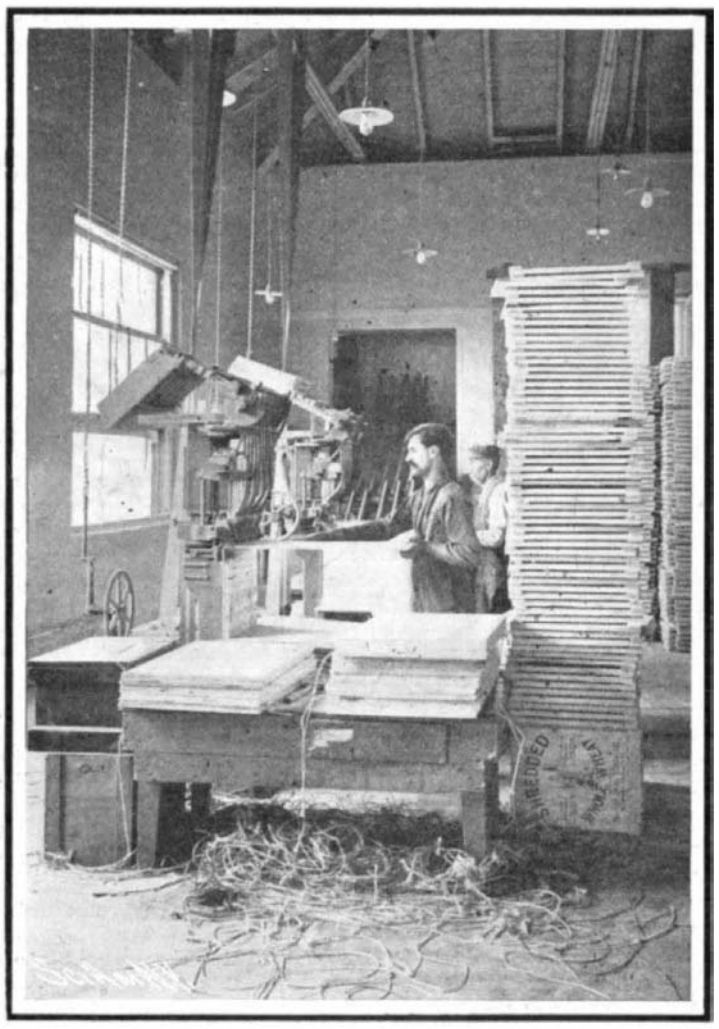

Box-Nailing Machine.

"Triscuit" is prepared on the same general lines, with the principal exception of the difference in the process by which it is baked, the finished product being a shredded wheat wafer instead of a biscuit. The various layers are compacted together by a special machine, the component parts of which somewhat resemble waffle-irons. Each bar is provided with a num-

THE MANUFACTURE OF CEREAL FOODS BY THE AID OF ELECTRICITY.

ber of sharp points which serve to indent the cracker. Current is provided to each bar, so that during the actual process of formation the cracker is baked. These forming and baking irons are carried upon an endless belt, which finally brings the cracker, or rather the sheet of crackers, to a device which cuts them apart, and, dropping on a belt, they are carried to the packing tables. Some idea of the activity of the shredding machines may be obtained when it is stated that the total number of shreds in one year's output for these two food preparations is 283,046,400,000 feet, or 53,607,272 miles, a length of shreds which would girdle the earth more than 2,144 times.

There are certain establishments where the comfort of the employe is considered without any sacrifice of self-respect on the part of the recipient, as notably in the case of some of our larger telephone companies; but in the plant of the Natural Food Company, to which we refer, even the enjoyment of the employes is carefully looked after. A beautiful lunch room is provided, and a very substantial meal, delicately served, is furnished without cost. There are flowers upon the tables, and an excellent piano is also in the room and is in daily use. The men have a similar lunch provided at a nominal cost. The shower and needle baths would be a credit to any athletic club, and the employes are given ample time to use them each week during their working hours. Various lectures and entertainments are provided, though with it all the whole plant is worked without too much suggestion of paternalism. A large lecture hall is also provided for the meetings of conventions of all kinds; and as Niagara Falls is practically the center of electrical industry, as well as being one of Nature's greatest handiworks, and easy of railway connections, it is in frequent use. Visitors are cordially welcome to this unique plant, which will remain a memorial of its founder, Mr. Henry D. Perky.

Life-Saving Equipment for Steam Vessels and Government Inspection.

BY J. H. MORRISON.

The shocking disaster of the sinking and burning of the large excursion steamboat "General Slocum" in the limits of this city, on the East River near 138th Street, on the morning of June 15 last, when about one thousand lives were lost, has strongly impressed the traveling public with the necessity of having all steam vessels better equipped with improved or more efficient fire-fighting apparatus and life-saving devices.

The accounts of the disaster show that the fire started in the forward part of the boat, near some crockery packed in hay, and within a very short time swept toward the midship, forcing the excursionists to jump overboard.

Aside from the regulations concerning protection from fire on steam vessels, the question of life-saving equipment is most urgent and important.

The first official notice thus far to be obtained of cork life preservers is in a report of a committee on the matter of a cork jacket life preserver in October, 1857, in which they say in part:

"While engaged in the consideration of cork life preservers, your committee would further state, that recent disasters have established their efficiency and reliability. Life preservers of this material, if properly made, and having sufficient buoyancy, fully comply with the requirements of the law, and are as desirable as any kind of life preservers now before the public. This opinion is, however, based upon the supposition that life preservers of this material are made in the form of a jacket, and the cork filling either in blocks or pieces.

"We desire further to state that in our opinion life preservers made in any form, and filled with cork dust or shavings, or the refuse of cork cuttings, are unworthy of confidence." And after passing a resolution to that effect, further said that "local boards are hereafter directed, when new life preservers are required, either in fitting out new steamers, or to supply the place of others which may be condemned, they shall not pass any form of life preservers, the filling of which is of cork dust or shavings, or the refuse of cork cuttings." The same opinion is held by the board in 1863, for the rules contain the same directions to refuse cork shavings, etc., as before mentioned; and in 1873 the rules say, "shall be made of good, sound cork blocks; . . . all not strictly in accordance with this rule shall be condemned by the inspectors." In 1876 there was a change in the rules, adding after "sound cork blocks," "and any other suitable material."

In 1855 they directed that all inflated life preservers, whether of India rubber or gutta percha, should be refused, as experience had shown that they did not satisfy the requirements of a proper life preserver. Tin life preservers a few years later were brought under the same censure, and were not received as in compliance with the law.

We have now before us the line marking the time of the indorsement of "sound cork block life preservers," made originally in 1857 and carried forward to 1876, a period of nineteen years. During all this time, there has not been found thus far on the record any occasion when the life preservers then in use were found wanting in buoyancy when put to the test.

It is perfectly clear how the early Board of Supervising Inspectors viewed the use of cork refuse, or the shavings of that substance, in a life preserver. There is nothing ambiguous in their report on the subject. They place themselves clearly on record. Looking at the rule after the addition of the words "and any other suitable material," it seems to leave a margin of discretion for a steamboat inspector greater than should be placed in his hands, be he either local inspector or assistant local inspector. Looking over the rules and regulations of 1904 of the Steamboat Inspection Service, it is found that under the head of life preservers, there were no less than five different manufacturers of granulated cork life preservers whose product was approved by the Supervising Board in 1885. The first granulated cork life preserver received official indorsement in 1878. When we view the records placed before us on this subject, it should be remembered that the original Board of Supervising Inspectors was largely composed of engineers of national reputation, not politicians. Between the advocates of "good sound cork blocks," and those for "granulated cork," we must await the trial of the "General Slocum" case by the Washington authorities.

Public feeling on this disaster of the "General Slocum" has been aroused to the same point of indignation as it was at the time of the "Henry Clay" disaster in 1852, with this difference, that at the earlier period there was in reality no law for the inspection of steam vessels; but the one that was passed by Congress thirty days later than that calamity had been in course of preparation for two or more years. At the present time we have abundant law on the subject, if of the right kind and faithfully carried out.

There has been considerable discussion since the late disaster on the point of the inspection of life preservers on our passenger steam vessels. There is a matter to be considered, as the law now stands, regarding this duty by the inspectors. The rules and regulations have contained the following provision for thirty years: "And it shall be the duty of the inspectors to see by actual examination that every such life preserver contains at least six pounds of good cork, which shall have a buoyancy of at least four pounds to each pound of cork." This it will be seen is an imperative order to inspect every life preserver; for it says: "It shall be the duty of the inspectors to see by actual examination that every such life preserver." New life preservers could be inspected at the factory where made. But how about those that have been on board of vessels? How are they to be tested, to find if they have lost their value of buoyancy by age? If every one on board of our steam vessels is to be annually inspected (and in the inspection district of New York by the last Annual Report of the Bureau, there are 218 inland steamboats and ferryboats over 100 tons each, and it is fair to assume that 800 life preservers would be an average for each of these vessels, as no official figures could be obtained just at this time) how long would it take an inspector to make an "actual examination" of 800 life preservers for each vessel? And how large a force of inspectors would it require to promptly perform the duty for all the vessels? If this has been a weak point in the service, it should by all means be corrected. To make a selection, as has been proposed, of say one in every twenty taken from different parts of the vessel, as a fair average of the whole equipment, and submit them to a test, and base their passage for inspection on this test, does not seem to comply with the law.

All questions affecting this disaster will be settled by an investigation before the Steamboat Inspection Bureau, and it is before this board that all technical questions will be brought out affecting all those concerned in the disaster, as well as the late inspection of the vessel. Some person or persons are responsible for this disaster, either now, or what led up to it; or the system of inspection may be so much at fault as to require being torn up root and branch. But let us wait for the decision of the responsible body, who will give this matter a thorough investigation, and who will finally locate where the blame lies.

[The coroner's jury in New York rendered a verdict on June 28 that the officers and directors of the Knickerbocker Steamboat Company, who owned the "General Slocum," together with the captain and mate, were responsible for the disaster.—ED.]

Interesting archeological discoveries have been made by MM. De Kerviler and Le Pontois during the excavation of an ancient tumulus on the estate attached to the chateau of Kerusseaux en Oueven, near Lorient. The archeologists found the extremities of two galleries, formed of parallel megaliths six feet high, and two vaults which apparently constituted the necropolis of an ancient tribe, among whom incineration and inhumation were practised concurrently. In addition to a pile of human remains there were found pogniards and knives in silex, axes in fibrolite, and some fine specimens of spherical pottery. M. De Kerviler estimates the date of the tumulus 2,000 years B. C.

Engineering Notes.

During the third quarter of the financial year American shipbuilders completed 177 vessels of 55,066 tons gross, as compared with 187 vessels of 58,588 tons gross in the corresponding period of 1903. Thirteen measuring 35,033 tons were steel steamers—a year ago the proportion was 20 of 41,803 tons—Atlantic and Gulf ports contributing seven of 17,874 tons, as compared with 11 of 15,382 tons, and the Great Lakes four of 16,744 tons, as compared with five of 17,398 tons. The grand total for the nine months is 232,133 tons, as against 230,187 tons in 1902-3.

A Select Committee of the House of Lords are considering a proposal to deepen the Manchester Ship Canal, and to raise the low-water level of the rivers Weaver and Mersey. Mr. Balfour Browne, K. C., in stating the case for the promoters, said that at present the depth of the canal was only 26 feet. In recent years the size of vessels had enormously increased, and a greater depth of water was now absolutely necessary. When the depth of the canal was fixed at 26 feet there were not half a dozen vessels built which could not get up the canal. Now hundreds of vessels were too large to navigate the canal. The deepening proposed would enable vessels of 11,500 tons deadweight to navigate the canal.

Those of our readers who are professionally concerned with the study of lateral earth pressures and related phenomena will find some interesting reading in a paper read before the American Society of Civil Engineers by Mr. E. P. Goodrich. There are many theories relative to the action of granular masses, the lateral pressures, planes of action, and planes of friction, but the results given by the formulæ evolved are somewhat at variance with each other, and with the results shown by such experiments as have already been conducted. The author of the paper to which we refer describes a comprehensive series of experiments which throw some new light on the subject generally, and will probably serve as the nucleus around which practicable working rules may be built.

The Cape to Cairo railroad, the inception of the late Cecil Rhodes, has reached the southern bank of the Zambesi River at the Victoria Falls. The first section of the project is now realized, over 1,600 miles of track having been laid down, stretching from Cape Town to this point. The construction of the single-span bridge which is to carry the track across the Zambesi gorge at a height of 420 feet is now being proceeded with, and the second section of the railroad will then be commenced. This section will run from the north bank of the Broken Hill, in the direction of Lake Tanganyika, a distance of 350 miles. Beyond that point no definite course has been decided, though there are several projected routes under consideration. According to Cecil Rhodes, this transcontinental railroad was to be 5,700 miles in length. While the track has been steadily constructed northward from Cape Town, the Egyptian end has been simultaneously proceeded with, and it is now 1,400 miles south of Khartoum. About another 2,000 miles of track has therefore yet to be laid before through railroad communication is established between Cape Town and Cairo.

Some interesting facts concerning the economy of operating motor-propelled trains upon the subsidiary and feeding sections of a trunk railroad, in comparison with the expense of maintaining and working similar lines by steam locomotives and short trains, have been furnished by the Taff Vale Railroad, of Great Britain. The type of train in operation upon this system has been described in the pages of the SCIENTIFIC AMERICAN, the train comprising a coach with the motor compartment placed at the fore end. The running cost per train mile by motor car equals 4.18 cents, as compared with 10.62 cents by steam locomotive and four carriages of the ordinary British type. The cost of repair and renewals of the motor car is much less than that of the other system, being only 2.92 cents per train mile, as against 12.44 cents for the steam-propelled train. The wages represent 3.86 cents in the former case, and 6.94 cents in the latter instance. Taken on the whole, therefore, it will be observed that the total cost per train mile of the motor car works out at only 10.96 cents, while the cost for the locomotive and carriages is 30 cents per train mile, representing a saving in the case of the former of 19.04 cents, or some 60 per cent cheaper. The economy thereby effected is very appreciable, and represents quite a considerable sum in the course of a year's operation. This result is highly encouraging, and will lead to a more extensive development of the motor-car system of handling short distance traffic. Already several of the other trunk railroads of the country, impressed with the figures obtained by the Taff Vale Railroad, are completing arrangements for the introduction of motor-propelled coaches upon their systems in those sections where the capacity of the traffic does not sufficiently warrant the employment of a locomotive and train, and wherein the working of the latter at present represents a heavy loss.

Patent Office Printing.

One of the most important branches of the work of the United States Patent Office is the printing of a liberal supply of copies of patents and the Patent Office Gazette.

The Norris Peters Company, of Washington, having special facilities for doing this work, have heretofore been awarded the contract almost every year for several years back, and have given universal satisfaction, not only to the Patent Office officials, but to all patent attorneys requiring duplicate photo-lithographic copies of drawings. We are informed this year a change has been made which is likely to create much inconvenience for attorneys.

It appears the usual course of advertising for bids for photo-lithographing and printing Patent Office work was pursued, and when the bids were opened on May 5 last, the Norris Peters Company was the only bidder. For some unexplained reason the bid was rejected by the board appointed to open bids, and new bids were advertised for, to be opened on June 15. On that date three bids were received and opened: One from Andrew B. Graham, one from the Sackett & Wilhelms Company of this city, and one by the Norris Peters Company.

The bid of the Norris Peters Company was the lowest on the first seven items, which embraces all of the work except the Official Gazette, and was about two thousand dollars less than the bid of the Sackett & Wilhelms Company, while on the Official Gazette the Sackett & Wilhelms Company were the lowest bidders. The board declined to divide the contract, but awarded the work to the Sackett & Wilhelms Company of this city as being the lowest bidders in the aggregate. It is believed that the work done by the Sackett & Wilhelms Company will be printed from aluminium, and not from stone, as has been done heretofore. In thus awarding the printing to a New York party, the drawings of the current issues of patents, etc., must be shipped by express to the Sackett & Wilhelms Company here, which is certain to cause great inconvenience to the attorneys practising before the Patent Office, as they will not be able to refer to drawings or to see them after they have passed to issue. Aside from this, there is the possible risk of loss of the original drawings through accidents or fire in transit, and the necessity of the office going to the expense of having every drawing photographed prior to being sent away for reproduction, as a check in the event of loss or possible change.

The printing required by the Patent Office has grown to such immense proportions that it is time a change was made in the methods pursued. There should be established a photographic and printing department in the Patent Office itself, equipped with every facility for rapidly reproducing drawings by the most modern machinery, supervised by a corps of experienced practical men, subject to the direction of the Commissioner of Patents.

It is a most unusual course to entertain bids from printing concerns located at distant points. If this plan is to be favored in the future, a printing establishment located on the California coast would have the same chance to be awarded a bid as one in Baltimore, only a few miles away. The consequent delay and inconvenience to attorneys and inventors is of no apparent importance. In the case of the Patent Office, it is a mistaken policy, which we suppose will be demonstrated as the contract is carried out. Attorneys and others should not be slow in lodging complaints with the Commissioner of Patents when their work is delayed or interfered with by reason of this change.

Newly-Discovered Property of Tin-Aluminium Alloy.

In a paper lately read before the Academie des Sciences, M. Hector Pecheux brings out a rather remarkable property which he observes in tin-aluminium alloys. If a rod of such alloy, having a freshly-filed surface, is placed in cold distilled water at 13 deg. C., an abundant supply of gas is given off from the filed part of the rod. This generally stops after two or three minutes. This phenomenon was observed with four alloys containing different proportions of the two elements. Analysis of the gas shows oxygen and hydrogen in the proportions of an explosive mixture. A rod of one or the other metal alone, or a rod which is not filed at the surface, will not cause the action. The rods he used were cast in a sand mold. Considering that on account of the sudden cooling in the mold the surface of the rod may have become tempered, he concludes that the action is due to this cause; at the surface of the rod the alloy takes the form of juxtaposed molecules of the two metals, and in the cold water these act like a series of thermo-electric elements of tin-aluminium (owing to the heating of the rod by the operation of filing), and the water is decomposed. This is due to the fact that the molecules of tin and aluminium have a considerable difference in specific heat (Al = 0.218 cal. Sn = 0.0562 cal.) and after the filing they have not the same temperature. Therefore they set up an electromotive force due to the thermo-electric action, and this stops when they become cooled by the water. If a filed rod is placed in an acid copper sulphate solution, bubbles of oxygen are given off and copper is deposited on the rod. A non-filed rod of tin or aluminium precipitates the copper, but no gas is given off. Sulphate of zinc produces a similar action, but gives off less oxygen.

Electrical Notes.

The power station which is being erected in London for the supply of the electric current to operate Mr. Yerkes' railroads is rapidly approaching completion. This power station when finished will be one of the largest of its type in the world. It is situated on the bank of the Thames at Chelsea. It is rectangular in shape, measuring 450 feet in length by 180 feet in width. It is erected in three tiers, and will have four chimney stacks, each 275 feet in height, with an internal diameter at the top of 12 feet. Brick has been employed throughout. A large river basin has been constructed, so that barges can come alongside the building, and unload the coal direct into the bunkers, a Temperley and a laced steel conveyor being built for this purpose. Large water filters have also been built, so that the water used in the boilers can be filtered first, thereby removing all impurities and reducing furring in the tubes to the minimum. The building has been divided into two sections. The riverside half contains the battery of sixty-four Babcock & Wilcox water-tube boilers, each of which develops about 1,200 horse-power. The boilers are erected in two tiers, with the coal bunkers above. Mechanical stokers and superheaters have been adopted. In the second part of the building the turbines and generators are installed. The plant will comprise eight turbines working eight generators, the power supplied aggregating 60,000 horse-power. The current will be of the alternating type, and the potential will be 11,000 volts. Nearly 20,000 tons of steel have been used in the construction of the building, and the foundations, which are of concrete and brick, are sunk to a depth of forty feet. Three electric railroads will draw their power from this station—the District, the Baker Street and Waterloo, the Great Northern, Piccadilly and Brompton, and in cases of emergency the Central London and the Metropolitan and District railroads. The total cost of the station will be $12,500,000.

In October, 1886, in a small room on the top floor of an old house in Pittsburg, Pa., three hundred incandescent lamps were lighted continuously for a period of about two weeks by alternating current, transmitted a distance slightly exceeding two miles, over a single-phase circuit comprising two copper wires of No. 4 B. & S. gage. The potential used was 1,000 volts, the frequency about 130 cycles per second, and the lamps were connected in parallel to the secondary circuits of half a dozen transformers. The ratio of transformation was 1,000 to 50. This was the first instance, in America at least, in which alternating current was used in transmitting electric energy beyond laboratory distances for the supply of translating devices connected in multiple arc. In the history of American industrial progress the Lawrenceville test, as it has been called, was an event of no little importance. Prior to the Lawrenceville test, distribution of electric energy to lamps or motors had been accomplished by continuous-current systems operating at potentials of 110 to 220 volts. The commercial significance of the Lawrenceville test is strikingly illustrated—although the impression conveyed by the illustration is a somewhat exaggerated one—by the story of the manager of a gold mine in Colorado, who, in 1896, was able to operate a stamp mill located at a distance of about three miles from his water power by alternating current transmitted to the motor over a circuit consisting of iron telephone wire of ordinary size. This was accomplished by using a high-potential single-phase alternating current. The cost of the telephone wire was about sixty dollars. It is stated that an estimate for a continuous-current plant to do the same work had been submitted by a manufacturer of continuous-current machinery, and that these plans called for the installation of copper circuits costing more than sixty thousand dollars.—L. B. Stillwell, in Cassier's Mag.

The British Admiralty seems to have met with some success in the utilization of liquid fuel upon war vessels. The torpedo-boat destroyer "Spiteful" has been passed into the Portsmouth Fleet Reserve, after satisfactorily undergoing her power trials. This vessel is only fitted for oil fuel, and is the first warship to be so equipped. The one great difficulty that has confronted the experimenters is the excessive smoke emitted by the consumption of oil, but this drawback has now been successfully overcome. No more smoke is emitted than with steam coal. One of the greatest advantages accruing from the use of liquid fuel is the economy in men. The number of stokers required for the vessel is decreased by ten or more. As the method adopted upon the "Spiteful" has proved so completely successful, the furnaces of two battleships are to be converted to burning liquid fuel immediately.

Correspondence.

The Colorado Cañon.

To the Editor of the SCIENTIFIC AMERICAN:

Your article last week on the Colorado Cañon was very interesting; but the Hance trail, while it may be the shortest, is not considered the safest and easiest. My daughters, two young ladies, were there in the summer of 1902, and went down the Bright Angel trail, a good portion of the way with horses, and the rest of the way on their own feet, without any ropes, and entirely without the assistance of the guide, except to show them the way, and scrambled up again, also without assistance, to their horses, and while the way was rough, at no point was it absolutely dangerous if proper caution is exercised. The horses were thoroughly trained, and went the whole distance without any guidance except to follow the guide's horse. My daughters let them take their own way, as instructed to do by the guide. S. S. MYERS.

Philadelphia, June 29, 1904.

Narrow-Gage Railroads.

To the Editor of the SCIENTIFIC AMERICAN:

I have read with interest the articles on narrow-gage railroads in your issues of May 21 and June 11.

I am well acquainted with the D. & R. G. R. R. of Colorado, and its construction was a wonderful achievement at the time it was built, some twenty-five years ago.

In 1899 I, as general manager of the E. P. & N. E. Railway, constructed the branch line known as the Alamogordo & Sacramento Mountain Railway in New Mexico. The distance from Alamogordo to Cloudcroft is 26 miles. The altitude of Alamogordo is 4,300, and of Cloudcroft 9,000 feet. The road is standard gage, 30 deg. curvature and 5.2 per cent gradient at its maximums. This road equals the D. & R. G. R. R. in its maximum of curvature, and exceeds it by 1.2 per cent in gradient, and has been in thoroughly successful operation ever since its completion. J. A. EDDY.

El Paso, Tex., June 21, 1904.

The New Element Europium.

In 1892 De Boisbaudran observed a spectrum in the case of certain solutions containing samarium which was characterized by three rays lying near together λ = 466.2, 462.7, and 459.3. These he supposed to belong to a new element and he designated it by the letters $Z\varepsilon$. In another case he observed with several similar products a fluorescent band which was included between the rays λ = 622 and 611. This element he designated by $Z\xi$. Later on, Demarçay succeeded in isolating a new earth from the oxides of this group and he called the new element *europium*. This latter element has the spectral characteristics of $Z\varepsilon$ and $Z\xi$. The solutions also have a slight absorption spectrum for which he determined the wave-length. The new element exists in a very small quantity as compared with samarium and gadolinum. It lies between these two in the series of rare earths. Demarçay obtained it by eighteen fractional operations.

More recently this work has been taken up by Messrs. Urbani and Lacombe, and they have separated the europium in sufficient quantity to determine the atomic weight. They used 610 grammes of oxides which represented the portion containing europium, coming from the treatment of one ton or more of monazite sands. These oxides contain samarium and gadolinum for the greater part. The europium was separated by a series of fractional operations which required three thousand crystallizations in all. The monazite sands are found to contain about 0.00002 of europium oxide. They also formed the sulphate of europium. After precipitating by alcohol, the neutral sulphate is crystallized from an aqueous solution and this salt has the formula $Eu_2(SO_4)_3.8H_2O$. It forms well-defined crystals of a slightly pinkish hue. It is not altered in the air, but takes the anhydrous form about 375 deg. C. The anhydrous sulphate is calcined at 1,600 deg. C., and becomes transformed into oxide. When thus prepared the oxide has a well-defined rose color, the oxide which is formed at a low tempera by calcining the oxalates is almost white. The atomic weight of europium has been calculated very closely by three different methods and the results are almost identical, fixing the atomic weight at 151.79, within a small percentage.

The Current Supplement.

The current SUPPLEMENT, No. 1488, opens with a very exhaustive and fully illustrated article on the Willamette Meteorite by Henry A. Ward. In an article by William J. S. Lockyer, "A New Epoch in Solar Physics" is described. Herbert G. Wells, whose scientific phantasies have earned for him an international reputation, discusses the discovery of the future. Mr. P. L. Sclater of the Royal Society tells much that is interesting of the Tasmanian wolf. The Zoelly steam turbine is fully described. The article by Messrs. Stromeyer and Baron on "Water Softeners" is continued.

THE SUBMARINE TORPEDO TUBE.

Although there was quite an animated discussion recently in the Board of Construction of the United States navy as to the value of the submerged torpedo tube, in which some eminent naval authorities were strongly opposed to its use in our new battleships and cruisers, the consensus of opinion of the members of the Board was in favor of the tube; and orders were given to install it on many ships now under construction, which were not originally intended to carry the submerged tube. We think that the decision was a wise one, particularly in view of the fact that the other great naval powers are, without a single exception, building such tubes on their later ships. One point urged against the submerged tubes is that their equipment, and the provision of submerged torpedo rooms in which they can be installed and operated, make a serious inroad upon the available space below the protective deck. There is no denying that, as our drawing shows, the torpedo room does monopolize considerable space, extending, as in the present instance, entirely across the width of the ship. On the other hand, the moral and military value of the submerged tube is so great as to quite outweigh any such considerations of economy and space. Its moral effect will be to keep the enemy at a distance, even when the ship itself may have been so damaged by the enemy's fire as to tempt the enemy to run in and sink it by heavy gun fire at close range or by using the ram, while the ship itself, during the varied maneuvers and favorable opportunitie sea fight, may find itself in a position where it c e its submerged tube with a good probability of hitting the enemy.

The torpedo tube shown in our engraving is of the type that is used on the battleship "Maine." The torpedo room is located in the forward part of the ship, below the protective deck, and its floor is therefore about 10 or 12 feet below the water-line. It is entirely shut off from the rest of the ship by two transverse watertight bulkheads. Two torpedo discharge tubes are mounted within the compartment, the one firing through the port side, and the other, as shown in our engraving, to starboard. The two tubes are not arranged centrally within the compartment, but are staggered, one being near the aft bulkhead, and the other near the forward bulkhead. Carried in racks attached to the aft bulkhead are a half dozen Whitehead torpedoes, three for each tube. In the drawing this bulkhead is broken away to show a torpedo in place; the rack that holds it is not visible, being covered by the torpedo. The center line of the tubes is arranged at right angles to the longitudinal axis of the ship. The tubes themselves are to all intents and purposes smooth-bore guns, of which the torpedoes are the projectiles. They are bolted securely to the floor, and their muzzles are bolted to a massive ring riveted into the plating and framing of the ship's side. The muzzles of the tubes, or the points where they open on the surrounding water, are closed by gates operated by hand-wheels, as shown in our drawing, the gate being normally closed, to prevent the entrance of water within the tube. When the tube is in action, a Whitehead torpedo, with its war-head, containing over 200 pounds of gun-cotton, is picked up from the rack by means of chain slings, suspended from overhead trolleys attached to the deck above, and is brought around on this trolley to the breech of the tube. The breech is provided with a breech-mechanism, consisting of an inner and an outer hinged cover. These are swung open, and the torpedo is thrust home into place and the breech mechanism is locked. The nest of tubes, which will be noticed lying along the breech of the gun tube, are compressed air reservoirs, one end of the nest connecting with the interior of the tube at the breech, and at the other end with a small firing-chamber containing a charge of gun-powder. The torpedo is discharged as a projectile by firing this charge of powder, and the object of the nest of tubes is to provide a pneumatic cushion between the powder gases and the base or rear half of the torpedo, the purpose being to insure that the acceleration of the torpedo shall be gradual, and that it shall not receive any heavy shock from the explosion of the powder, the powder gases acting to compress the air in the tubes, and the air being driven from the tubes against the torpedo.

Before the torpedo is fired, however, the gate or valve at the muzzle of the tube is, of course, opened, and at the instant of firing, a half-round shield or mouthpiece is automatically carried into the water on the forward side of the axis of the torpedo tube. This serves to stop the rush of water past the mouth of the tube, and enables the torpedo as it is fired to get clear of the side of the ship's hull before it strikes the water. As the torpedo passes out of the tube, a latch on the former is released by engaging a suitable projection on the tube, and this latch opens a connection between the compressed-air chamber and the engines of the torpedo, thereby insuring that the engines are running and ready to assist the flight of the torpedo, by the time it is clear of the ship and fully immersed in the water.

The torpedo tube is operated in the torpedo room by three men and an officer. In most cases, the torpedo will be fired from the deck above; for it is manifest that the officer in the torpedo room cannot possibly sight the gun himself. In firing by this method, sights will be arranged on the upper deck in the same vertical plane as the axis of the torpedo, and parallel with the same. Since the torpedo tube is built rigidly into the structure of the ship, it is evident that the tube must be traversed by steering the ship itself, until the tube is brought to bear in the desired direction. When the ship's course has been altered sufficiently to bring the enemy's ship in line, the proper corrections for respective speeds of the ship, etc., having been made, the officer on deck having received word by telephone from the torpedo room that the torpedo is loaded and ready for firing, closes an electrical circuit, and the torpedo is fired. The torpedo is provided with automatic means for preserving it at the desired depth of about 10 feet, at which it is designed to travel; and for steering the little submarine, there is arranged within the torpedo a 3-inch gyroscope wheel, which is attached to a steering engine that acts directly upon the rudders. By setting the gyroscope on the exact course required, this wonderful little device takes charge of the steering, and will bring the torpedo, even should it be momentarily deflected, back to the true course, and keep it there as long as the torpedo is running.

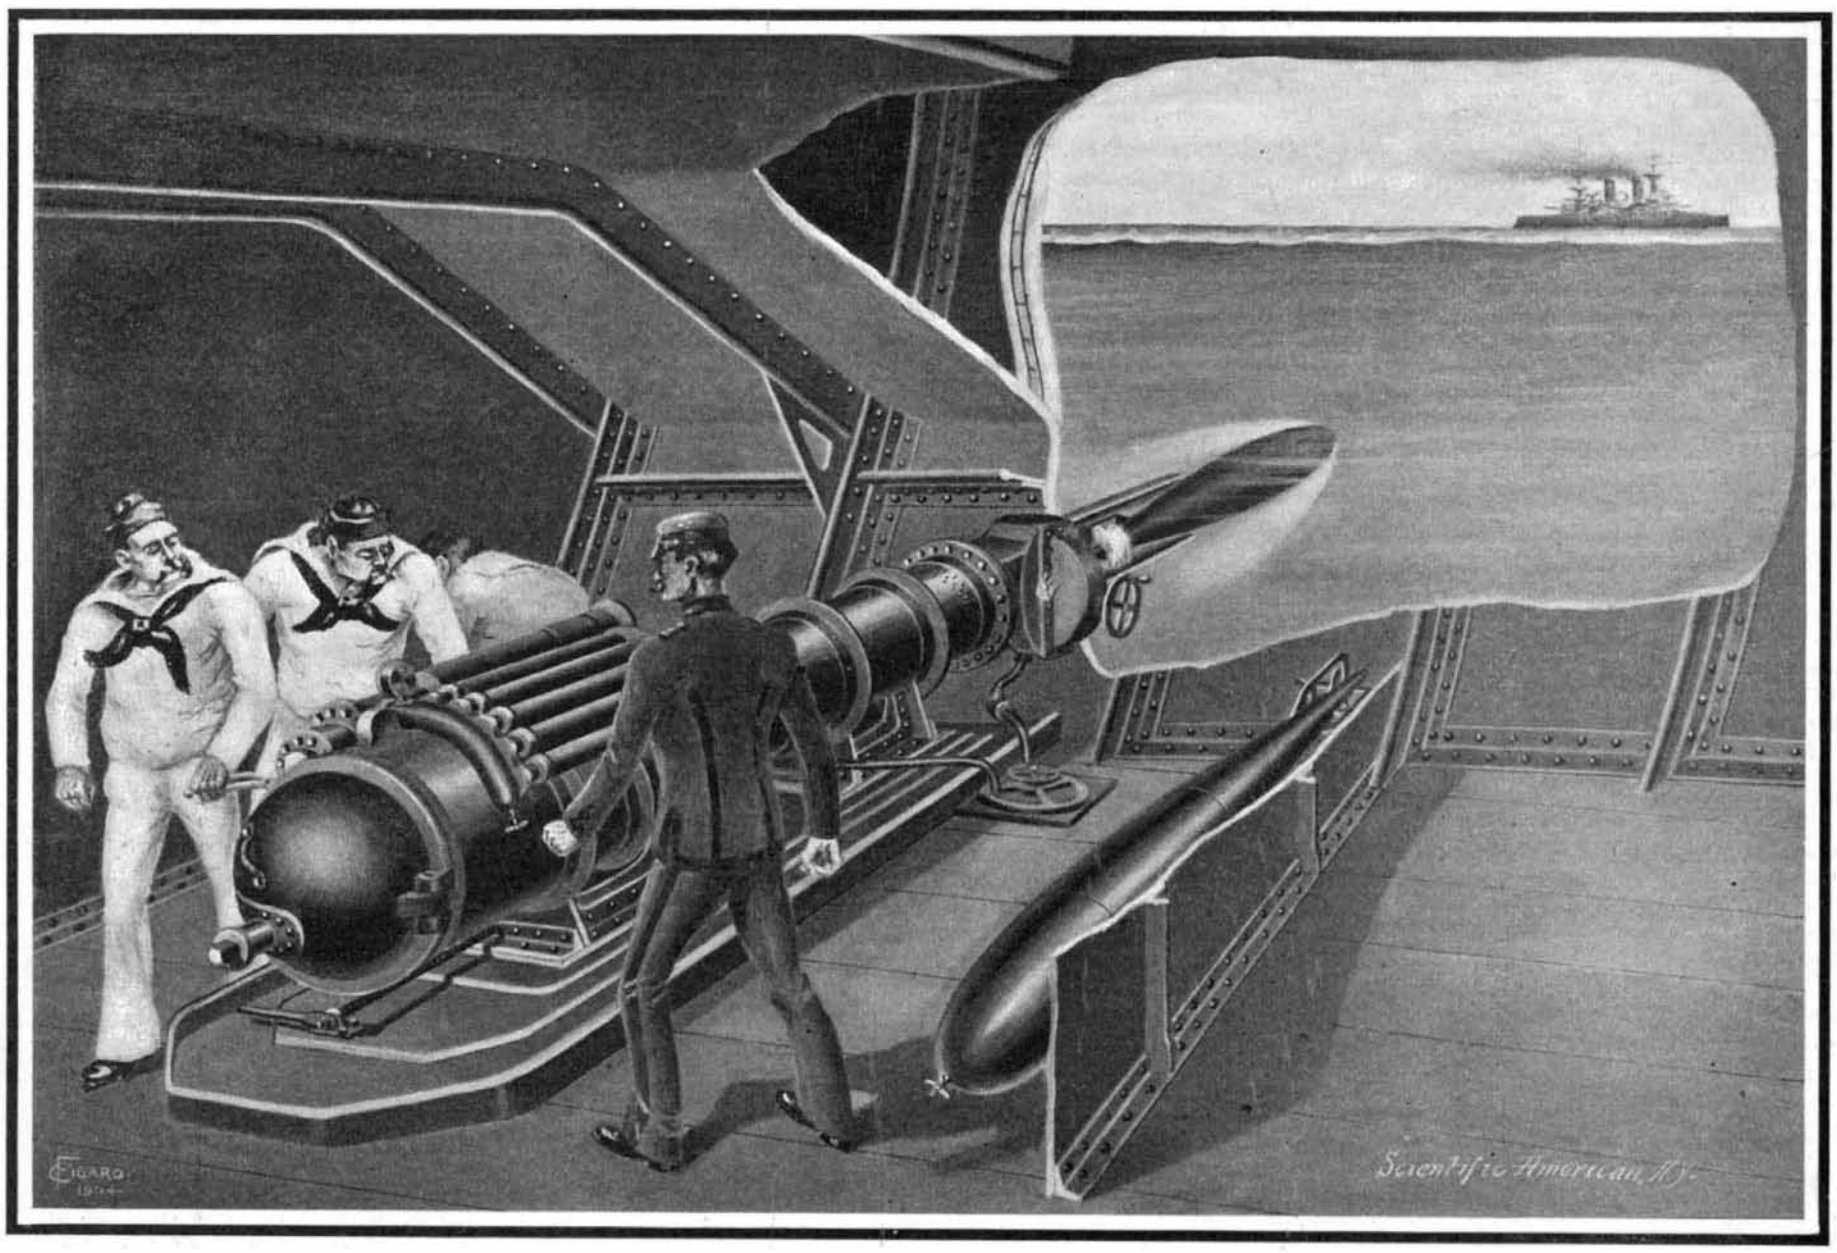

The tube opens through the side of the ship at a depth of about 10 feet below the surface. The torpedo room is situated immediately below the protective deck, the sloping side of which, and the waterline belt armor beyond, are shown broken away.

SUBMERGED TORPEDO ROOM OF A MODERN BATTLESHIP.

A Huge Cableway.

A huge cableway, which when completed will be the longest in the world, is to be constructed on the Argentine side of the Andes Mountains by the engineering firm of Adolf Bleichert & Co., of Leipsic (Germany). This cableway is to extend from the Chilecito station of the Argentine Northern Railroad for a total distance of 32 miles. Its termination at this end will be 14,933 feet above sea level, and the engine station that will be erected at this point of the cableway will be the highest in the world. No less than 87 miles of rope will be required for the cableway. The project will necessitate many remarkable engineering difficulties being surmounted, since at one or two points the cableway will have to span gorges 2,800 feet wide by 650 feet deep. The cableway is to have a carrying capacity of 44 tons of ore per hour, and cars each containing 1,100 pounds of ore are to be dispatched at intervals of 45 seconds.

THE GORDON BENNETT CUP RACE.

BY SPECIAL CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

No less than six different nations were represented in the cup race this year, and it proved an event of the greatest interest. The race was held in Germany, and the Kaiser took an active hand in carrying out the arrangements.

The starters in the race were as follows: Germany had three representatives, Jenatzy and Baron De Caters, each on a Mercedes car, and Fritz Opel on an Opel-Darracq. England was championed by Edge on a Napier car, and Sidney Girling and Jarratt, each on a Wolseley. The three Austrian cars were also of the Mercedes type, but were built at the Vienna works. They were mounted by Werner, Braun, and Warden. The latter is the well-known American chauffeur. Belgium was represented by three racers of the Pipe make, piloted by Baron de Crawhez, Hautvast, and Angieres. The three French racers are of different makes and these cars were the winners in the eliminating trials, which were held before the cup race. The Richard-Brasier car was mounted by Théry, the Mors car by Salleron, and the Turcat-Méry (De Dietrich make) by Rougier. Italy had also three cars, all of the Fiat make, piloted by Cagno, Lancia, and Storero. The Swiss car of the Dufaux make was unable to start at the last minute on account of an accident.

This gave a formidable array of eighteen racing cars, which is by far the largest number which has yet entered the Cup race. This made the race of greater interest this year than ever before, and it thus represented a great industrial battle between the different nations, some of which were already in the front rank, while the others were making their *début*. The cars were all weighed just before the start, and all came very close to the limit weight of 2,200 pounds. The German cars were painted white, the English green, the Austrian black and yellow, the Italian black, the French blue, and the Belgian yellow.

The route which was chosen for the Cup race lies in the Taunus region, to the north of Frankfort and not far from the Rhine. The route makes a somewhat

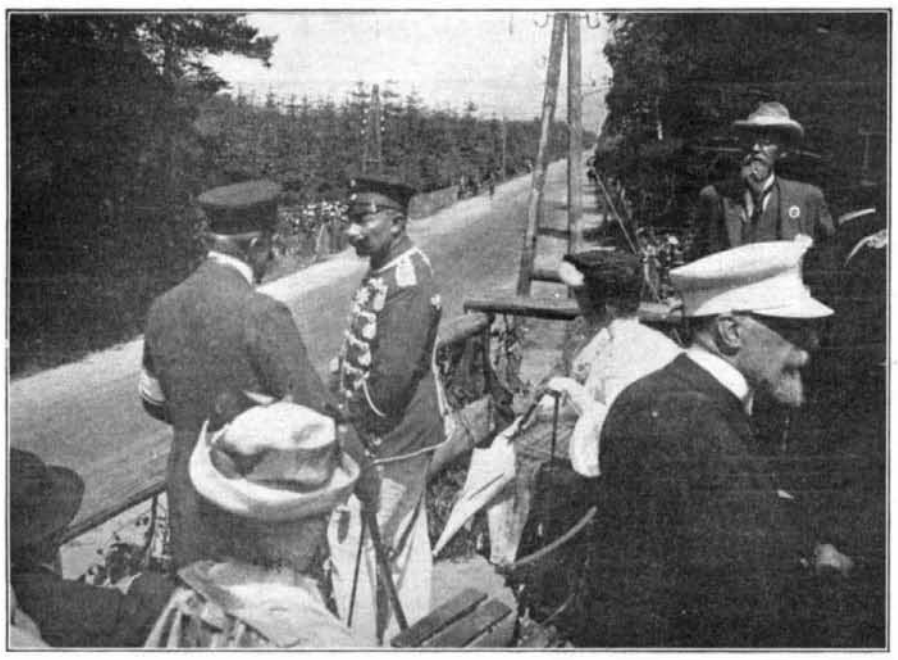

Kaiser Wilhelm Viewing the Races from the Grand Stand.

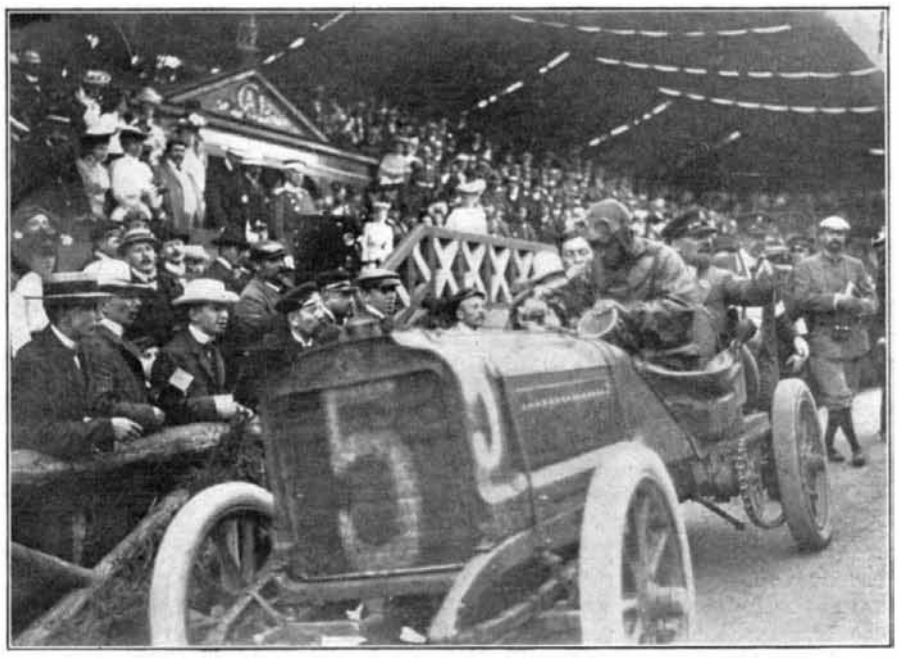

Thery, the Winner, at the Finish, in Front of the Kaiser's Box.

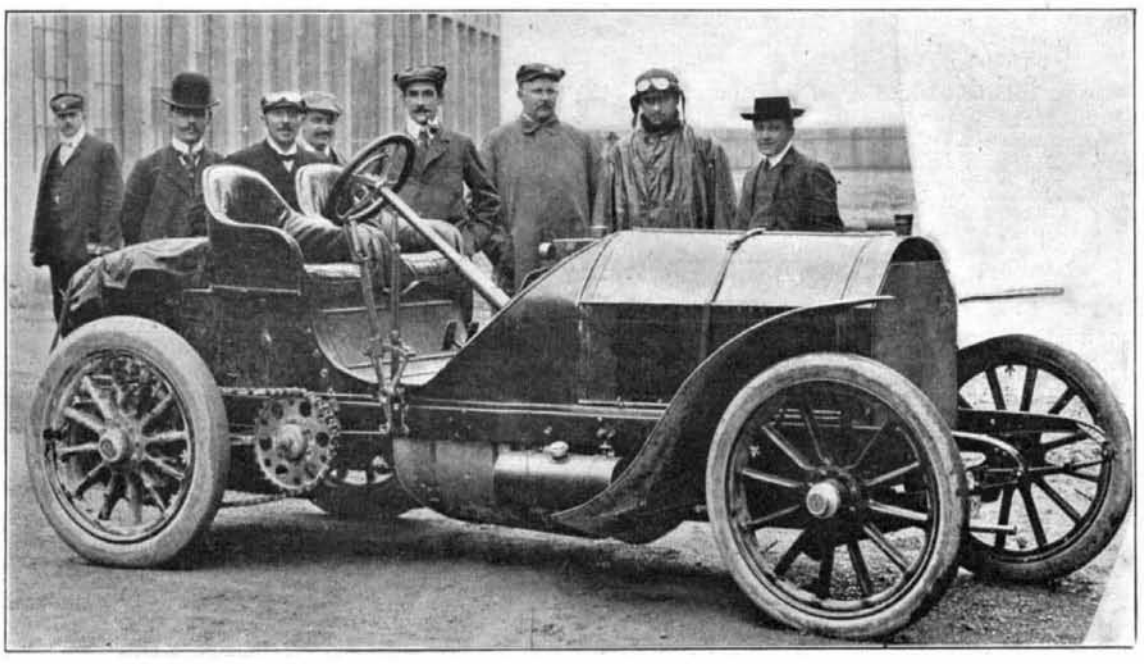

Mercedes Car, with Jenatzy, Who Came in Second.

Baron de Crawhez on a Pipe Car (Belgian).

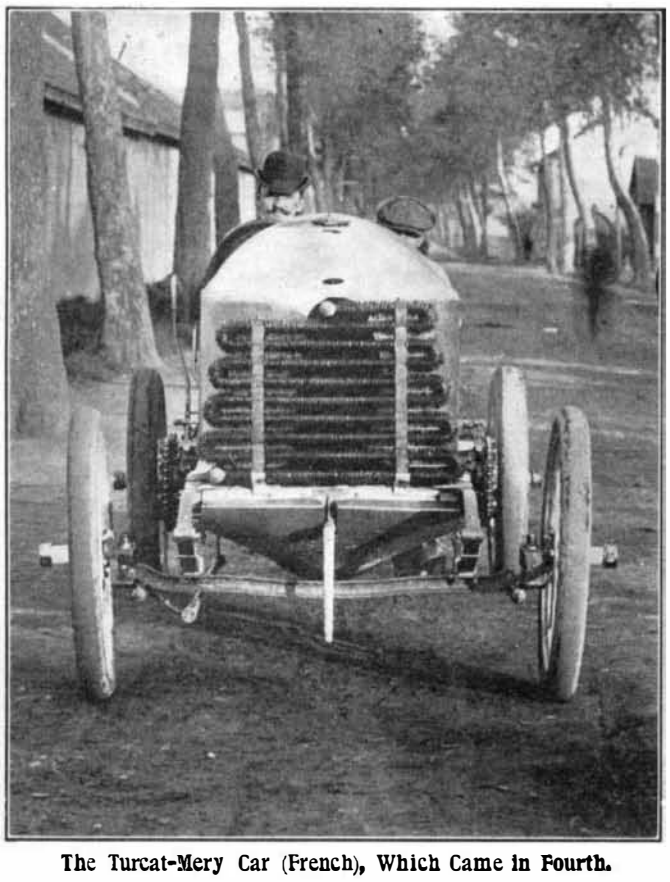

The Turcat-Mery Car (French), Which Came in Fourth.

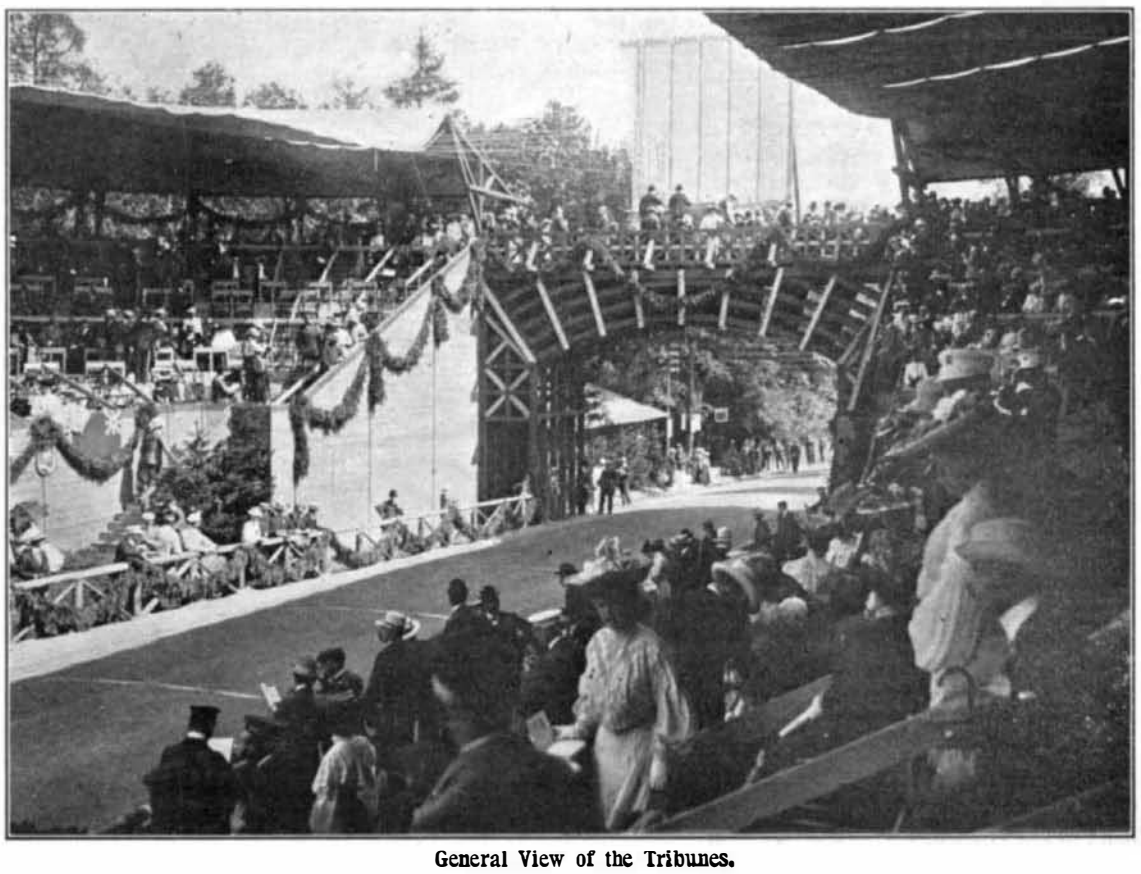

General View of the Tribunes.

THE GORDON BENNETT CUP RACES ON THE HOMBURG CIRCUIT.

elliptical circuit, passing through Limburg, Weilburg, Usingen, and Homburg, besides a number of smaller towns. The starting point of the race was chosen at a point near Homburg, known as the Saalburg. The part of the road which lies through the towns was neutralized, and did not count in the racing distance. There were ten control points on the route. The total racing distance for the four rounds which the cars had to make is 528 kilometers (327 miles). The condition of the road in the circuit is reasonably good, but there are some very steep grades and a number of short turns, which gave a severe strain on the cars.

One of the main points to be noticed in this year's event is the large proportion of well-tried racers, representing the leading makes. It was not so in last year's race; although there were as many as twelve competitors, many of them had not made much of a record on the road. In the front rank this year were six Mercedes cars. Three of these had been built in Austria, but on the same lines as the German cars. The French team was represented by three of the leading makes, each of which had already distinguished itself in the different races, and these cars were only chosen after a severe contest in the eliminating trials, where they came out ahead of other competitors, who were also record-winners. It seemed certain from the start that the struggle would be between the French and German teams; then came the English, Belgian, and Italian, which are in the second rank.

The start was to take place from the Saalburg at 7 o'clock in the morning. At daybreak everybody was up, and the starting point was the scene of great animation. The chauffeurs looked after their cars and made the final preparations, while an immense crowd began to assemble, and take their places in the tribunes or along the track. Excellent order was maintained among the crowds by the large number of troops, which had been called out for the occasion. The Kaiser arrived from the neighboring town, where he had spent the night. He appeared on horseback, while the Empress accompanied him in a carriage. With him came the Crown Prince and other members of the royal family. The Kaiser took his place in the imperial tribune amid great cheering, and shook hands with the principal competitors. The tribunes were filled to overflowing with an immense crowd, among which were chauffeurs from all parts of the world. The excitement increased as the time approached for the start. Jenatzy was the first in line, with his Mercedes car. At the signal he made a superb start amid wild cheering, and was soon out of sight.

Edge, on his Napier car, followed at an interval of seven minutes, and after him came Werner, and so on for the eighteen competitors. In general, all the cars made a good start, except that of De Caters, which had some difficulty with the ignition, and was thereby delayed some minutes. Jenatzy was the first to make the turn. He appeared in sight, and passed at lightning speed. Shortly after him came Edge, who appeared to be in good form. He was followed very closely by Théry, who had started fifth in order, but passed two of the other competitors *en route*. His time for the first round was but one-half second behind that of Jenatzy.

The time for each round was posted on an immense bulletin board as each car passed the line. On the first round the English team held a good place, followed by Salleron on his Mors car. However, the interest of the race was centered in the match between Théry and Jenatzy, as it seemed certain that one or the other would win.

On the second round Jenatzy passed first, then Théry, but the latter had started 35 minutes after, and his time was then 1 min. 46 sec. in advance of his rival. On the third round Théry had gained 10 minutes, and his performance showed the greatest regularity. The other competitors followed at short intervals. On the last round every spectator was on his feet; all eyes were turned to watch for the first car. Although Jenatzy arrived first, it was Théry who won the race by 11 minutes, and his time for the four rounds was 5 hours 50 min. 8 sec. Of the other cars, as many as ten had been able to finish, or twelve in all out of a total of eighteen. The Kaiser, accompanied by the Empress and the royal family, received the leading French delegates, and congratulated them upon their success.

The results of the race, as to the time required to make the complete distance of four rounds, or a total of 528 kilometers (327.4 miles) racing distance, are as follows: The time made by Théry was 5 hours 50 min. 3 sec.; Jenatzy, 6:1:28 1-5; De Caters, 6:46:31 2-5; Rougier, 6:47:11 1-5; Braun, 6:59:49 1-5; Hautvast, 7:2:36 2-5; Salleron, 7:15:15 3-5; Lancia, 7:17:54 1-5; Girling, 7:22:54 1-5; Cagno, 7:23:36 3-5; Werner, 7:32:14; Jarrott, 7:36:52. The average time made by Théry was very close to 60 miles an hour.

As to the types of car which made the best time, the order is as follows Richard-Brasier (French); two German Mercedes cars; Turcat-Méry (French); Austrian Mercedes car; Pipe (Belgian); Mors (French),

The greatest interest, of course, centers in the winning car of the Georges Richard-Brasier type. This car is among the leading Paris makes, and was designed by M. Brasier, the engineer of the company. It is expected to furnish a complete technical description of these cars as soon as they return to Paris. In the meantime it may be mentioned that they carry a four-cylinder motor of the vertical pattern, which is rated at 80 horse-power. The ignition is carried out by a magneto, which is driven from the motor. Chain gearing is used for the transmission from the motor to the rear wheels. The front part of the car is of somewhat square form, and is provided with a radiator of the wing type in front. The radiator is cooled by an air-fan placed just behind it and driven from the motor.

The car weighs about 2,140 pounds, and the distance between axles is 8 feet 8 inches. The gage is 50 inches. At full speed of the car the motor is coupled direct to the rear part. The gear-changing box provides for three different speeds. In the racing car all the valves of the motor are mechanically operated. The truck is built of pressed steel, and has front wheels 32 inches in diameter and rear wheels 33 inches.

The Turcat-Méry car, which is among the winners, is another of the leading French makes. It is built by the well-known De Dietrich Company, who adopted this type of car, which was designed by two Marseilles engineers, in preference to the type which they formerly built. Although one of the new cars, it is already a record winner, and came out among the first in this year's eliminating trials.

This car is equipped with a four-cylinder motor, which is rated at 100 horse-power. Contrary to the usual practice, the motor uses automatic inlet valves. There are four such valves per cylinder. The motor is provided with magneto ignition. The car has a pointed or torpedo-shaped front box, with the radiator mounted in the extreme front and beyond the pointed end. A double chain transmission is used from the motor to the rear wheels. The chassis of these cars is built of wood, reinforced with steel plates. The front and rear wheels are 35.2 and 35.6 inches in diameter respectively. The complete car weighs 2,090 pounds. The axles are spaced 9 feet 1 inch apart, and the wheel gage is 4 feet 8 inches.

The Mors racing car has also a 100 horse-power motor of the vertical four-cylinder type. It is built in the boat-shaped or torpedo form, which gave these cars such an attractive appearance last year. The radiator is mounted below the pointed end of the car, and is nearly concealed from view. The motor drives the differential by a direct coupling when at the highest speed. The inlet valves are of the automatic type. This car also uses a chain transmission to the rear wheels. The complete car weighs 2,200 pounds, and the chassis is built of pressed steel. The wheels are spaced 8 feet 8 inches apart, with a 3 foot 1 inch gage, which is comparatively narrow.

The three Belgian cars, one of which took a good place, were built by a leading Brussels firm. The four-cylinder motor of these cars is formed by two castings having two cylinders each. All the valves are operated by a single cam-shaft, and means are provided for relieving the compression of the motor when starting. The admission of gas to the motor is regulated by a throttle-valve, which is placed on the inlet pipe leading from the carbureter. The motor is rated at 100 horse-power.

Accumulators, with spark coil and plug, are used for the ignition. One of the peculiarities of the Pipe automobile is the use of a newly-invented form of magnetic clutch for coupling the motor to the rear shaft. The clutch is formed of a set of disks, one of which has the magnetizing coil imbedded below the surface. When the current is thrown on, the disks come together, and connect the motor to the rear shaft. This clutch has already been described in detail. The gear-changing box provides for four speeds. The chassis is built of wood strengthened with metal.

The Italian cars are built by the Fabrica Italiana, of Turin. The motor is designed for 75 horse-power. It has four vertical cylinders. Magneto ignition, of the Jucisa system, is employed. The inlet valves of the motor are mechanically operated. At starting, the compression of the motor can be relieved. The gasoline reservoir is placed in the rear, and is under pressure. The honeycomb type of radiator is used on these cars, and the flywheel of the motor is placed just behind the radiator, having the form of an air-fan. The distance between axles is 9 feet 3 inches, and the complete car weighs 2,177 pounds.

Briquette fuel is now extensively used in mines, mills, factories, smelting works, chemical works, etc., in all parts of Germany, and the results are said to be eminently satisfactory. For instance, experiments with lignite briquettes in a plain grate furnace resulted in the generation of 5 kilos. of steam per 1 kilo. of fuel, or a relative capacity of two to three compared with ordinary steam coal.

Weeds Used in Medicine.

The United States Department of Agriculture has just issued Farmers' Bulletin No. 188, entitled "Weeds Used in Medicine." The bulletin was prepared by Alice Henkel, Assistant in Drug and Medicinal Plant Investigations, Botanical Investigations and Experiments, Bureau of Plant Industry.

Attention is called to the fact that certain well-known weeds now either generally or locally infesting the country are the sources of crude drugs at the present time obtained wholly or in part by importation from abroad. Roots, leaves, and flowers of several of the species most detrimental in the United States are gathered, prepared, and cured in Europe and not only form useful commodities there, but supply to a considerable extent the demands of foreign lands. Hence it appears probable that while weeds can hardly be made desirable, still in his fight to exterminate them the farmer may be able to turn some of them to account. Some of the plants coming within this class are in many States at present subject to anti-weed laws, and farmers are required to take measures toward their extermination. It seems, therefore, desirable to make these pests sources of profit where possible.

The prices paid for crude drugs from these sources are not great and would rarely tempt anyone to pursue this line of work as a business. Yet, if in ridding the farm of weeds, and thus raising the value of the land, the farmer can at the same time make these pests the source of a small income instead of a dead loss, something is gained.

In order to help the farmers to obtain the best possible results for such products, instructions for collecting and preparing crude drugs from weeds are briefly given.

The plants mentioned in the bulletin are burdock, dandelion, the docks, couch grass, and pokeweed (principally root drugs); foxglove, mullein, lobelia, tansy, gum plant, scaly grindelia, boneset, catnip, hoarhound, yarrow, fleabane, blessed thistle, jimson weed, and poison hemlock (of which either the leaves, flowers, herb, or seeds are used in medicine); and also wormseed, and black and white mustards, of which only the seeds are used.

Descriptions of these plants are given, together with the common names by which they are known in different localities, the habitat (or, in other words, the kinds of places or soils in which they are likely to be found), their geographical range, information as to the parts to be collected, their uses, the extent to which they are imported, and the prices usually paid by dealers.

The principal uses for which these plants are employed in medicine are briefly indicated, but notice is given that none of the drugs mentioned should be taken without the advice of a physician.

Suggestions are also given relative to the manner of disposing of the crude drugs and of packing and shipping them.

The bulletin contains 31 illustrations of the weeds described. It is for free distribution and can be obtained on application to Senators, Representatives, and Delegates in Congress, or to the Secretary of Agriculture, Washington, D. C.

Wireless Telegraphy from Panama to New England.

It is said that a contract has been signed with a New York wireless telegraphic company, providing for five of the longest wireless circuits in the world. The government has been given the full use of the system, and incurs the expense of installing it. The contract is the first step toward the realization of a plan for placing New England and Panama in wireless communication. After the establishment of the service, its extension to the Orient is a matter of no difficulty. The circuits are as follows:

Key West to Panama, 1,000 miles.
Porto Rico to Key West, 1,000 miles.
South Cuban coast to Panama, 720 miles.
Pensacola to Key West, 450 miles.
South Cuba to Porto Rico, 600 miles.

Stations have already been erected by the company on the Atlantic Coast from New England to Florida, and by means of the naval wireless station to be erected at Panama connections will be made with the De Forest stations now in course of construction on the Pacific, and thence to the Aleutian Islands, which station will be the key to the Alaskan business.

The death occurred recently of Col. Hiram M. Carpenter at Bellevue Hospital in New York. Col. Carpenter was the inventor of a number of electrical devices, particularly in the direction of the improvement of batteries, and at one time had accumulated a comfortable fortune, but at the time of his death was poverty-stricken. He was 64 years of age and won his title during the civil war, when he served with the Iron Brigade of Wisconsin, and the Twelfth New York Cavalry.

A CURIOUS FORMATION OF HORSE'S SKULL.

BY ED. J. C. WRAITH.

Near Swan Hill, Victoria, there was found not so very long ago the skull of a horse which tells a pathetic story. When quite young the animal evidently escaped with a piece of manila rope tied tightly around his jaws. In the struggle for existence, the rope became embedded in the bones of the upper and lower jaws. The opening of the lower jaw, through which the rope passes, at first sight would seem to have been drilled; but in reality it was worn away by the friction of the rope on the bone.

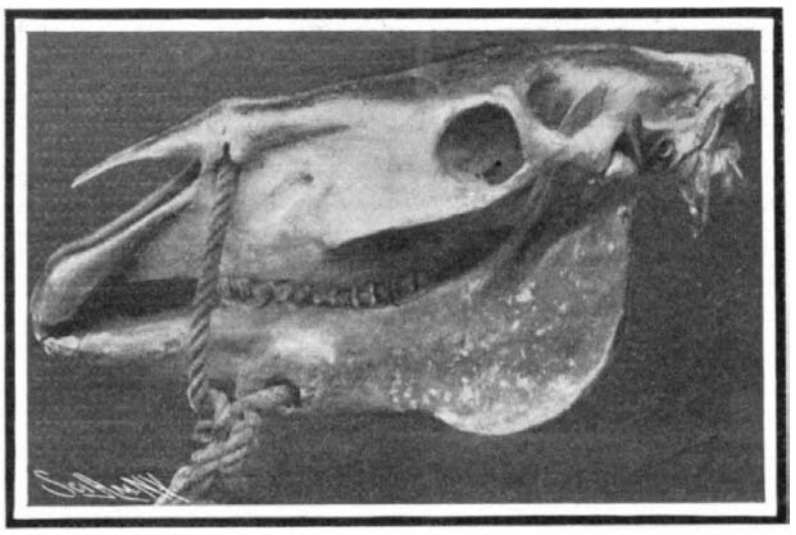

HORSE'S SKULL WITH A ROPE EMBEDDED THEREIN.

THE NEW NEMETHY FLYING-MACHINE AND THE PRINCIPLE OF ITS CONSTRUCTION.

BY DR. ALFRED GRADENWITZ.

More than two years ago a flying-machine built by Mr. E. Némethy, of Arad, Hungary, on the well-known kite principle, was discussed in these columns. In this flying-machine an air propeller was rapidly rotated by a gasoline engine. In the course of the experiments made on this machine, as well as by direct observations, the inventor became convinced that on the kite principle a machine could not travel any great distance horizontally, unless an amount of energy quite out of proportion to the effect produced be expended. Birds, on the other hand, do not show any visible effort, and as their wings are placed in a perfectly horizontal plane, their flying resembles much more the flying of paper arrows than of kites. Némethy, accordingly, decided on imitating, in the novel type of flying-machine which he has just designed, that other schoolboy's toy, the paper arrow, the following rules being followed in its construction:

Any flying body, moving horizontally in the air, will undergo a *statical* drift, equivalent to the weight of the air volume which would be statically displaced in the same interval of time in the case of a vertical fall through the air.

Any body falling vertically through the air will, in its fall, displace statically an amount of air equal to the volume of the body, plus the volume of the air cushion formed below the falling body, the existence of which was discovered by Loessl.

If the weight of the flying body be either equal to or smaller than the weight of the amount of air displaced according to the above, the body will float in the air; if this weight be greater, the body will sink, like a body that floats or sinks in water, according as its weight is equal to or else smaller or greater than the amount of water displaced.

For a flying surface moving horizontally through the air at a speed v, the volume V of the air cushion causing the surface to float will be equal to the product of the cross section f of the air cushion by the length L of the same, the latter being equal to the length of the flying surface l plus the speed v.

Accordingly, $V = fL = f(l + v)$.

The weight j of the air cushion being equal to the product of its volume by its specific weight,

$$G = Vj = f(l + v)\ j.$$

The total weight of a flying-machine therefore should not be greater than the weight of the air cushion G.

In the case of a broken flying surface, similar to bird wings, the volume of the bearing surface will be greatest if the wings are inclined downward to the horizontal at an angle of 22 deg. 30 min. The angle B, according to Loessl, is 45 deg. If a be the length of each swinging wing, the cross-section of the air cushion f will be:

$$f = 2a \cos \alpha \frac{(a \sin \ + a \cos \alpha)}{2}$$

$$f = 2a \cos \alpha \frac{a}{2}$$

$(\sin \alpha + \cos \alpha) = a^2 \cos \alpha (\sin \alpha + \cos \alpha)$. In the case of $\alpha = 22$ deg. 30 min., $\cos \alpha (\sin \alpha + \cos \alpha) = 1.2071$.

This figure (1.2071) thus is a constant for calculating the most favorable magnitude of the bearing surface in the case of the weight and speed of a flying body being given.

When birds move their wings up and down, they swim through the air in accordance with the above laws, the horizontal speed necessary for obtaining the statical drift, as well as the lifting effect in rising, being due to the sliding component of the helicoidal movement of the wings, while the statical drift itself may be varied by altering the horizontal speed. The cross-section of the bearing air cushion is equivalent to the mean value of the cross sections obtaining in the up and down movement of the wings, i. e., to the cross-section corresponding to the horizontal position of the swinging wings.

Birds that float in the air, without moving their wings, may equally be said to swim through the air in accordance with the above laws; the surface of attack offered to the wings by the corresponding position of the body, the wings, and the tail of the bird, being at any time such as to drive the bird in the direction desired. As a sailing ship, by virtue of a corresponding adjustment of the sails and the rudder, may be driven even by a back wind acting at sharp angles, the fact that birds in floating through the air may even move against the wind, is very easily accounted for.

A dynamical flying-machine, designed according to the above laws and able to float in the air at a given speed, requires for horizontal flight as much motive power as necessary to drive the floating machine against its front resistance, with any possible strength of the wind, at a speed such as to secure the length of bearing air cushion necessary for the drift. If the motor be stronger than would be necessary for obtaining the floating motion according to the above, the flying-machine, besides floating horizontally, would rise from the ground, the machine being pushed forward on the ground at a higher speed than would be necessary for horizontal flight, and the flying surface receiving a rising direction by lifting the rudder as soon as this increased speed is obtained.

The front surfaces should be as small as possible, and the bearing surfaces so designed as to have the longitudinal axis coincide with the direction of flight. In order to insure a stable floating of flying-machines, constructed according to the above laws, the load should be so distributed on the latter as to have the center of gravity of the whole machine lie below the center of gravity of the supporting air cushion, this position being maintained during the flying movement.

In order to design a suitable dynamical flying-machine according to the laws enunciated, Mr. Némethy uses a bearing surface resembling an arrow, made from linen, silk, aluminium, or the like, the wings of which should best be inclined downward to the horizontal line at an angle of 22 deg. 30 min., so as to obtain the maximum cross section of air cushion, the axis of curvature being parallel to the line of flight.

In order to obtain the necessary horizontal speed, parallel wheels or air propellers may be used, the latter being located either in the middle of the bearing surfaces or laterally, or else both in the middle and laterally, being driven by an automobile motor or the like. The weight of the whole flying-machine, including the motor, should according to the above be less than the weight of the supporting air cushion.

The airship may be made dirigible by means of a stern rudder, a vertical rudder, and, if necessary, by two lateral rudders. In order to start the airship from the starting slope or cause the airship to rise from the ground or to alight, the inventor provides a set of wheels on which the whole machine may roll along. By driving these wheels either by means of the propeller motor or a special motor, either in conjunction with or simultaneously with the air propeller, the whole flying-machine may be used on the roads as an automobile, or else the initial speed may be so rapidly increased as to enable the airship to rise even from an ordinary road.

Although the machine has been constructed, no test has yet been made. Until that test is made, we must forbear criticising the construction.

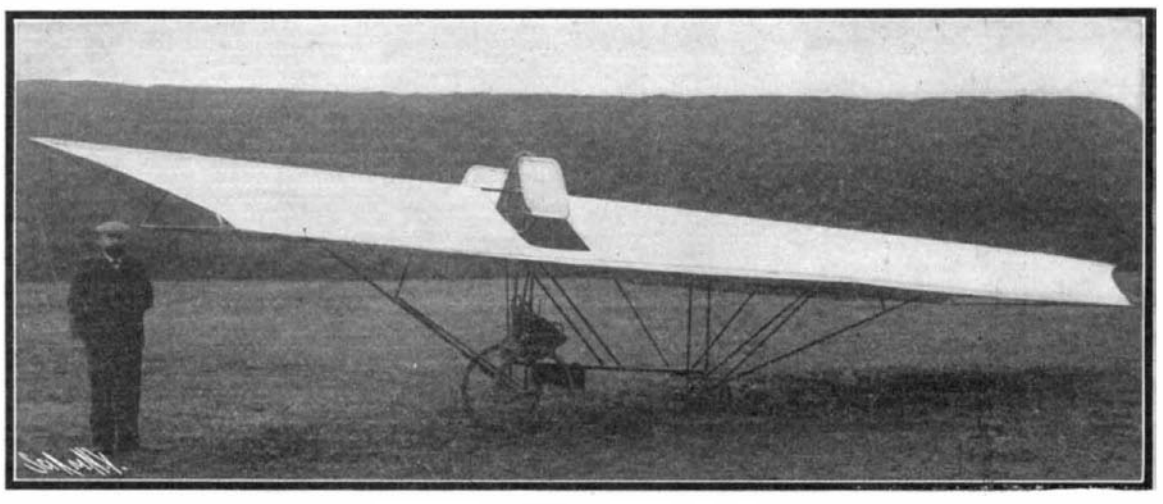

NEMETHY'S NEW FLYING-MACHINE.

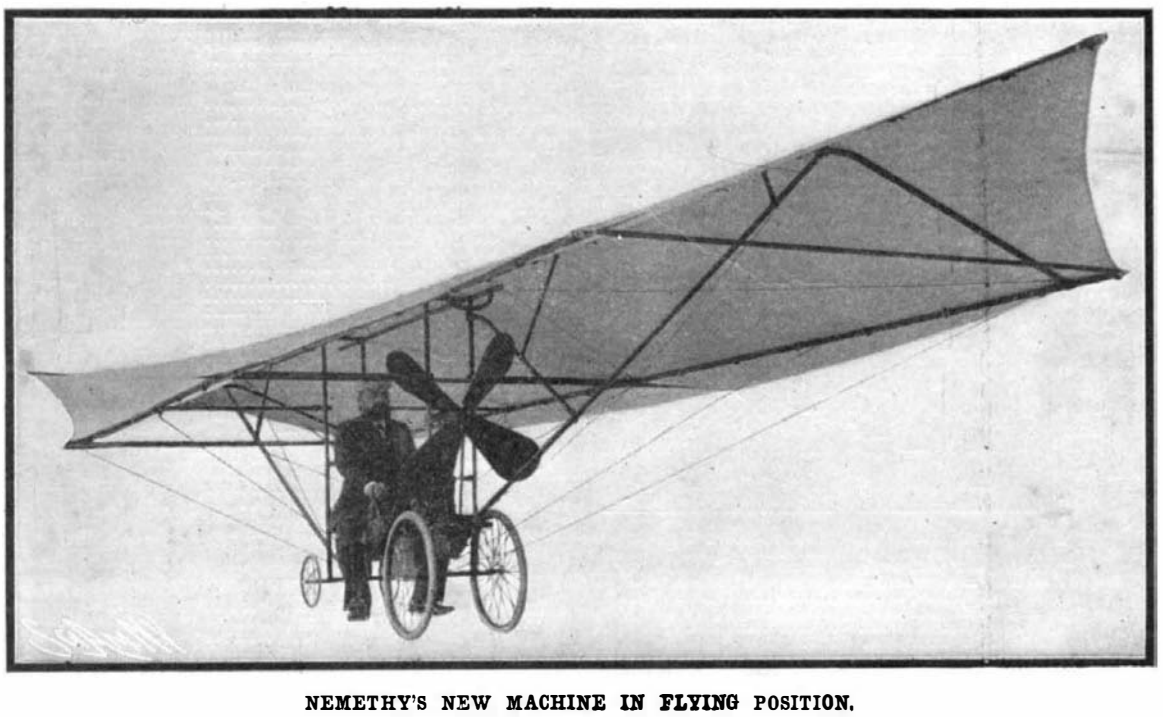

NEMETHY'S NEW MACHINE IN FLYING POSITION.

Extent of the Fish-Hatching Industry.

We no longer speak of hatching thousands of fry, but of millions and hundreds of millions. The number of eggs, fry, fingerlings, and adult fish distributed by the Bureau of Fisheries in 1902 aggregated one and one-half billion. It is certain that the shad, whitefish, laketrout, and pike perch fisheries, each of vast importance, have not only been saved from entire depletion, but that they have been maintained, chiefly through artificial propagation, at a high degree of productiveness. That these fisheries are industries to-day, valued at nearly $3,000,000 annually, is due entirely to artificial propagation by the Bureau of Fisheries.—From the National Geographic Magazine.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

RAIL.—L. STEINBERGER, New York, N. Y. Certain advantageous features are embodied in this invention, among them being provision for allowing the rail to rock slightly during the passing of a train, and insuring a more constant and nearer perfect contact; for providing a bearing-surface for distributing pounding action; for relieving the rail and support of undue strains; for limiting movements thus set up in the rail; for supporting the rail against displacement; for more effectively shedding rain, sleet, snow, etc.; for more thoroughly insulating rail from cross-tie, and for providing a form of rail more readily distinguishable from ordinary rails, thereby preventing accidents.

SUPPORT FOR RAILS.—L. STEINBERGER, New York, N. Y. Mr. Steinberger's invention relates to a means for supporting rails and admits of general use, but is particularly applicable to railway systems employing the so-called "third rail" for the purpose of distributing the electric curent. Among the several objects of the invention, one is to permit a maximum relative movement as between the rail and its support in a plurality of directions. Another, to provide an insulated rail-support presenting the least possible mechanical contact-surfaces to the rail, thereby allowing the rail free movement and avoiding possibility of rail sticking to its support, and thereby bending or breaking it.

ELECTRIC SIGNALING SYSTEM.—J. DIANOVSZKY, Passaic, N. J. The object in this case is to provide a system, more especially designed for preventing collisions of trains and arranged to automatically bring a train to a stop when it passes into a section occupied by the train ahead to allow the engineer of the last train to put himself in telegraphic communication with the engineer of the train ahead, or vice versa, and to allow proper dispatch of the trains from a terminal station without danger of derailing or collision by imperfectly set switches.

ELECTRIC RAILROAD-CROSSING SIGNAL.—T. C. CLARK, Cambridge, Ohio. This signal for warning teams and pedestrians, comprises two circuit-closing devices arranged in the track, one each side of the crossing and about one hundred and fifty yards from the same, an electric bell which is mounted in a box at the crossing and arranged to be rung upon the approach of a train in either direction, a commutator with electric motor for turning it by which the time during which the bell is to continue in operation is controlled, and electromechanical devices for opening and closing the various circuits and holding them open or closed, as required, and also a circuit-breaking device for the track-circuit.

ELECTRIC SIGNALING SYSTEM.—S. M. YOUNG, New York, N. Y. In this patent the invention consists in a signaling system especially adapted for use on electric railways where the motive power employed is a source of direct-current energy. The object is to provide means whereby the condition of any section of the railway may be visibly, audibly, or otherwise indicated—as for instance, through the operation of semaphore-arms, bells, lights, etc.—or whereby the speed of movement of any car upon the railway may be modified upon entering or leaving any section of such railway—as, for instance, by automatically varying the resistance of the motor-circuit.

Of Interest to Farmers.

PLANTER.—J. H. GROOTERS, Allendorf, Iowa. In this case the purpose is to provide a means for releasing the seed from the seed box or boxes at proper periods, which means are controlled by the guide wire, chain, or cable used in connection with the machine, and further features relate to the construction of the seed-dropping devices, means for regulating the winding of the chain or cable upon the drum, and the construction of the drill shoes which are provided with devices at their lower ends for releasing seed to be dropped into the ground.

DEVICE FOR OPENING OR CLOSING GATES.—H. C. MORGAN, Eugene, Ore. By this improvement the inventor so arranges the ropes and pulleys as to enable the operator to open and close the gate from any point on the ground, in a wagon, or on a load of hay, or the gate may be opened by a cable on the ground or by a man on horseback or without the use of ropes as may be desired.

Of General Interest.

ATTACHMENT FOR MARINERS' COMPASSES.—J. ROPER, St. Johns, Newfoundland. This attachment enables bearings of heavenly bodies, landmarks, lights, and distant objects to be taken accurately, enables accurate bearings to be taken at night, the mariner to discover deviation of his compass by taking fixed bearings and comparing with compass indication, accurate bearings to be taken with binnacle without its removal or interference with its hood or top, bearings to be taken off pole-compasses, and to discover by noting bearings of a fixed object from time to time how tide is setting.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of the paper.

IMPROVED SCREWDRIVER.

Electricians and others who are required to drive screws in difficult and inconvenient places, will appreciate the value of the screwdriver here illustrated. The blade of the screwdriver consists of two jaws, over which a sleeve is fitted. This sleeve is so arranged that when moved forward it will crowd the jaws together, permitting them to be inserted



in the screw slot, and when the sleeve is withdrawn, the jaws will spread and hold the screw by pressing against the side walls of the screw slot. The screw can then be driven without the necessity of being held by the hand. Mr. S. E. Condon, 266 Hewes Street, Brooklyn, N. Y., who is the inventor of this screwdriver, desires to dispose of his patent, either outright or on a royalty, to some established manufacturer.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring theinformation. **In every case it is necessary to give the number of the inquiry.**

MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 5719.—Wanted, a proofing compound for oiled clothing which will dry with a surface free from all stickiness.

AUTOS.—Duryea Power Co., Reading, Pa.

Inquiry No. 5720.—For makers of refrigerating plants of one half or one ton capacity.

For hoisting engines. J. S. Mundy, Newark, N. J.

Inquiry No. 5721.—For information in regard to making wood alcohol, acetate of lime, etc., in connection with charcoal production.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 5722.—For manufacturers of sad-irons or flat-irons which are heated by gasoline.

If it is a paper tube we can supply it. Textile Tube Company, Fall River, Mass.

Inquiry No. 5723.—For manufacturers of small, complicated springs and clips, of music wire.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 5724.—For parties to make small special steel chains of 16 gauge (B. & Sharpe) wire.

WANTED.—Exclusive sale improved automobile specialties. Specialties, Box 773, New York.

Inquiry No. 5725.—Wanted, a 3 h. p. marine boiler.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company. Foot of East 138th Street, New York.

Inquiry No. 5726.—For manufacturers of pile drivers.

Sheet metal, any kind, cut, formed any shape. Die making, wire forming, embossing, lettering, stamping, punching. Metal Stamping Co., Niagara Falls, N. Y.

Inquiry No. 5727.—For makers of creosote shingles for roofing purposes.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 5728.—For small fancy tassels made of paper, card, etc.

Inquiry No. 5729.—For parties to make to order stampings of wrought iron or soft steel plate, 3/8 inch thick.

Inquiry No. 5730.—For makers of photo-button frames and photo jewelry.

Inquiry No. 5731.—For makers of rotary fans driven by clockwork.

Inquiry No. 5732.—For makers of brick-making machinery.

Inquiry No. 5733.—For makers of gas balloons.

Inquiry No. 5734.—For the address of the firm in Connecticut making little Egyptian charms.

Inquiry No. 5735.—For makers of electric and motor truck for hose truck for fire department.

Inquiry No. 5736.—Wanted, a patent for a good selling appliance, for sale at a fair figure.

Inquiry No. 5637.—Firms manufacturing machinery for a pencil factory.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending June 28, 1904

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Abdominal hernia-pad, combined, A. E. Magoris 763,683
Acid proof composition, F. A. Pank 763,421
Adding and recording machine, W. H. Pike, Jr. 763,692
Adjustable bracket for mirrors, etc., Eble & Martin 763,380
Air brake apparatus, O. A. Alexander 763,834
Alarm device, E. L. Fitch 763,386
Aluminium, electrolytic manufacture of, G. Gin 763,479
Attaching and detaching device, W. A. Alexander 763,453
Audiphone, C. J. Massinger 763,414
Automatic coupling, Lukens & Hughes 763,771
Automatic signal, T. F. Keating 763,613
Automobile, L. Lacoin 763,494
Axle, vehicle, J. B. Baynes 763,839
Bag frame, B. vom Eigen 763,740
Bake pan, J. A. Bailey 763,653
Baling press, W. H. Kauffman 763,905
Bar which cannot be sawed through, P. D. Ziegler 763,651
Barometer, aneroid, F. E. Collinson 763,659
Barrel hoop, wire, J. F. Pool 763,794
Barrel rack, A. A. Charlebois 763,855
Basket, E. L. Walker 763,580
Basket, grape, E. L. Walker 763,578
Basket handle, detachable, E. R. Walker 763,577
Beating engine bed-plate, S. R. Wagg 763,817
Bed, folding, H. Brandt 763,358
Beet lifter and topper, Smith & Giddings 763,571
Bench. See Toy bench.
Binder, loose leaf, G. P. Williams 763,583
Block molding machine, L. P. Normandin 763,942
Block signal, automatic electric, W. A. Luby 763,411
Blotter holder, J. A. Walsh 763,646
Boat, C. A. Manker 763,684
Boiler check, A. B. Haller 763,881
Book binding, C. Chivers 763,857
Book, manifolding, H. E. Delbare 763,598
Book protector, S. L. Greene 763,554
Boot or shoe, K. Engel 763,600
Boot tree, inflatable, H. G. Hoyes 763,489
Boring machine, Duquette & Heath 763,738
Bottle, E. E. Lewis 763,914
Bottle filling machine, W. F. Fanning 763,601
Bottle, non-refillable, A. G. Abizaid 763,534
Bottle, non-refillable, G. Zister 763,831
Box fastener, D. A. Schnabel 763,430
Brake and mud guard, combined, F. L. Fisher 763,871
Brewing kettle, hop jack tank, and cooker, combined, C. F. Hettinger 763,606
Brick drier, moving, I. P. Armstrong 763,349
Briquet machine, F. Meyer 763,498
Broom heads, making, S. P. Edmiston 763,665
Bucket, lifting, Hains & Weaver 763,391
Bucket, well, C. A. Crane 763,371
Building block forming machine, W. Raab 763,634
Burial caskets, etc., handle for, G. A. Schebr 763,799
Burner. See Gas burner.
Burner, P. B. Curran 763,728
Button, C. Schmidt 763,512
Calipers, J. T. Lemon 763,913
Can caps or seals, tool for locking, H. A. Truesdale 763,937
Candle extinguisher, G. Stevenson 763,440
Cap, convertible tourist and automobile, R. Fox 763,602
Car check, J. W. Aregood 763,836
Car door, grain, W. A. McGuire 763,622
Car dumping mechanism, metallic, A. Becker 763,841
Car, flexible wheel base, G. L. Stuebner 763,807
Car guard rail, street, J. J. Collins 763,723
Car, hopper, Russell & Ames 763,696
Car, hopper bottom, Wolff & Lipschutz 763,706
Car lubricating apparatus, W. J. Raum 763,693
Car, metallic flush floor dump, A. Becker 763,947
Car roof, metallic railway, J. J. Souder 763,438
Car underframe, railway, C. E. Bauer 763,589
Car wheel, D. P. Rennie 763,930
Cars, device for loading or unloading trains of, J. A. McManus 763,779
Carbon from pulverized carbonaceous materials, separating, J. D. Daring 763,859
Carbon sheet holder, F. Jefferson 763,762
Carbonating apparatus, A. Heymann 763,753
Carousel, H. S. Thomas 763,811
Carpet fastener, W. Haussler 763,485
Case. See Exhibition case.
Celluiose, converting wood, Ewen & Tomlinson 763,472
Cement, composition of matter for, A. L. Ginter 763,746
Cement derived from ashes and making same, M. W. Marsden 763,685
Certificate of deposit, A. W. Moore 763,778
Chafe iron, roller, T. H. Brady 763,715
Chair, F. Bennett 763,656
Check-canceling press, A. Dietze 763,733
Chest protector, C. Uebel 763,815
Christmas tree holder, J. C. Chenot 763,856
Chuck, G. R. Rich 763,796
Churn, C. Y. Roberts 763,636
Churn, S. C. Lavender 763,769
Circuit closing device, A. B. Chance 763,464
Clay or other insoluble materials, apparatus for separating, M. W. Phillips 763,792
Clay or other insoluble materials, separating, M. W. Phillips 763,923
Clock chiming and repeating mechanism, C. A. Jacques 763,899
Cloth shearing machine, W. F. Ambach 763,835
Clothes pin, A. E. Pickert 763,793
Coal sieve or separator, J. G. Brock 763,362
Coat and hat hanger, M. H. & B. F. Burton 763,461
Coherer, W. S. Hogg 763,894
Coin receptable, H. P. Townsend 763,522
Coke, making, M. R. Conley 763,369
Coke oven, electric, M. R. Conley 763,368
Colors, preparation of salts of iron for use in oil, R. Vidal 763,574
Concentrating table, G. A. Overstrom 763,783 763,784
Concentrating table actuating mechanism, G. A. Overstrom 763,785
Concrete wall making apparatus, H. Dohl 763,376
Condiment holder, I. W. Livingstou 763,916
Continuous kiln, P. L. Youngren 763,533
Conveyer, J. C. Hoshor 763,896
Conveying driving mechanism, J. C. Hoshor 763,897
Cop cutting mechanism, T. Hansen 763,882
Copper sulfate, making, G. Gin 763,478
Corn cutting and shocking machine, D. T. Phillips 763,632
Corn husking machine husking roller, E. A. Johnston 763,611
Corn shock binding device, W. J. Nicholson 763,781
Corn shock loader, D. T. Phillips 763,631
Corn shock or hay loading or stacking apparatus, J. Peterson 763,506
Cotton blending and cleaning apparatus, C. B. Sample 763,798
Cotton cleaner and gin feeder, J. W. Gooch 763,748
Cotton picker, pneumatic, R. Getzlaff 763,589
Coupling device, Schmidt & Mayland 763,431
Coupling pins in couplings, device for holding fractured, Harlow & Gillett 763,883
Crank motion, variable, E. E. Emerson 763,742
Crate for berry boxes, etc., folding, E. L. Walker 763,579
Cremating furnace, W. Horsfall 763,562
Cross tie, E. J. Johnson 763,900
Cuff holder, E. E. Dean 763,860
Culinary utensil, C. Canclini 763,593
Cultivator, S. W. Rowell 763,511
Cultivator, motor driven, L. Imperiale 763,760
Current motor, alternating, M. C. Massie 763,774
Curtain fixture, window, C. E. Heinrich 763,486
Curtain pole, W. M. Black 763,713
Curtain pole, self supporting, C. Benson 763,844
Curtain ring, A. L. Parker 763,691
Cutter, T. B. Miller 763,687
Cutting tool, A. E. Venn 763,527
Damper regulator, stove, J. R. Reed 763,928
Decorative light, H. Sax 763,428
Deflectious, apparatus for reading angular, P. H. Wynne 763,829
Dental plates, swaging or fitting, A. L. Fisher 763,385
Dental tool guard, R. L. Magoon 763,918
Desk or writing table attachment, school, Gilson & Rowe 763,878
Die for cutting taper threads, W. Vosper 763,816
Directory, telephone, M. G. Brownell 763,940
Diseases, cabinet for treatment of hemorrhoids or other, B. F. Johnson 763,765
Dispensing vessel, J. G. Lowe 763,917
Door hanger, C. E. Harrington 763,393
Drapery hook, L. Nachmann 763,780
Draw clamp for draw benches, Berghof & Theberath 763,710, 763,711
Drawer guide, W. Laakso 763,492
Drier. See Brick drier.
Drying materials, L. Gathmann 763,387
Drying substances, L. Gathmann 763,388
Drilling machine, T. G. Davis 763,373
Duplicating machine, C. H. Colter 763,725
Dye and making same, orange tetrazo, Jedlicka & Schedler 763,761
Dyeing composition, G. M. Lawton 763,616
Easel, E. C. Entler 763,382
Eaves trough hanger, C. S. Wolford 763,449
Educational device, O. H. Powers 763,926
Electric battery, P. J. Kamperdyk 763,674
Electric fixture support for outlet boxes, W. F. Bossert 763,355
Electric lighting system for vehicles, J. A. Little 763,495
Electric machinery control, dynamo, E. R. Carichoff 763,658
Electric machines in adjustable relation, means for securing the stators and rotors of, Bohmlander & Pfeifer 763,845
Electric regulating switch, Dix & Sandford 763,861
Electric switch, W. S. Tobie 763,520
Electric transmitter, Mundy & Smith 763,501
Electrical exchange, automatic, Lundquist & Erickson 763,412
Electrical uses, resistance for, J. F. Tracy 763,812
Elevator, G. Visco 763,946
Elevator doors, locking and interlocking attachments for sidewalk, P. H. Jackson 763,609
Embossing press attachment, H. G. Turner 763,524
End gate, wagon, C. E. Byington 763,718
Engine cylinder, steam, L. R. Alleman 763,586
Engine drum, hoisting, derrick, or similar, A. E. Norris 763,417
Engine exhaust muffler, explosive, D. Ogden 763,626
Engine lubricating apparatus, E. D. Caldwell 763,719
Envelope, E. Z. Wanous 763,944
Envelope, safety, H. Rueve, Jr. 763,797
Exercising machine, Frazee & Whitcomb 763,475
Exhibition case, revoluble, D. Woods 763,584
Explosion motor, R. Algrin 763,535
Explosive, W. Kirssanoff 763,675
Explosive compound, C. M. Hall 763,665
Explosive motor, rotary, C. A. Marlitt 763,773
Eyeglass nose guard, G. J. Kirby 763,907
Fabric cutting machine, Seiberling & Smith 763,804
Faucet, combination, S. S. Williamson 763,827
Faucet, two way, S. S. Williamson 763,826
Feed water supply regulating apparatus, J. Davie 763,730
Feeding mechanism, E. A. Oakes, Jr. 763,625
Fence-gate, G. H. Harman 763,392
Fence stay clamp, wire, P. B. Yeider 763,830
Fence, wire, W. M. Wadleigh 763,446
Fence wire tightening device or tool, F. Vogelzang 763,445
Fertilizer, E. F. Wright 763,450
File, cabinet or index, A. E. Walker 763,704
File or rasp cutting machine, H. Crane, Jr. 763,727
Film developing machine, J. M. Brainerd 763,357
Filter beds, apparatus for removing material from the surface of, H. W. Blaisdell 763,354
Fire shutter, P. Ebner 763,381
Firearm ejector mechanism, E. Beach 763,458
Firearm removable joint pin, A. H. Day 763,467
Fireproof ceiling, H. Schmidt 763,513
Fireproof floor and ceiling construction, H. & C. D. Oliver 763,680
Fish line float, F. Hachmann 763,557
Fishing gaff, M. F. Cook 763,726
Flask. See Foundry flask.
Fluid shut-off, W. & J. Boekel 763,714
Fluid switch, N. H. Medbery 763,686
Flushing drains and sewers, means for, Shone & Ault 763,641
Folding chair, A. J. Jackley 763,490
Folding gate, J. Guerin 763,804
Folding machine, C. A. Sturtevant 763,644
Food, means for preparing liquid, S. Januliewicz 763,401
Foundry flask, E. J. Cochran 763,465
Garment clasp, M. Coffey, reissue 12,237
Gas burner, incandescent, L. T. Alton 763,587
Gas check, F. Geiger 763,876
Gas generator, P. Meyer 763,919
Gas generator, acetylene, W. W. Cozins 763,595
Gas generator, acetylene, A. V. Sanford 763,638
Gas making apparatus, C. M. Baker 763,455
Gas producer, P. J. Buckley 763,460
Gear, transmission, F. G. Gies 763,477
Gear, two-speed reversing, F. A. Ferguson 763,548
Gearing for the transmission of power, wheel, G. S. Baker 763,654
Glass drawing machine, J. E. Berry 763,353
Glass grinding machine work holder, Starr & Garrett 763,439
Glass lamps, etc., manufacture of, E. W. Bryce 763,849
Glass sheets, apparatus for making, J. Proeger 763,633
Glove, decoration, P. Doppenschmitt 763,736
Glove washing form, C. Krell 763,406
Gold dredging machine tumbler, W. Ferris 763,869
Governor, engine or like, Taylor & Evans 763,573
Grader, road, H. Woods 763,650
Grain separator, S. A. Furman 763,875
Grating, safety, G. T. E. Henriksen 763,890
Grinder, wet, J. J. Rexroth 763,635
Grindstone fixture, T. P. Ellis 763,469
Gun sight, A. M. Andrews 763,348
Hair drier, D. J. Buckley 763,717
Hair retainer, J. E. Daughters 763,597
Handle, Parmenter & Kohler 763,627
Harvester, C. Hesse 763,891
Harvester attachment for raising and saving down grain, W. M. Wadleigh 763,447
Harvester, corn, W. V. Phillips 763,424
Harvester, corn, E. L. Schanck 763,569
Harvester, corn, D. T. Phillips 763,630
Harvester tongue truck, E. A. Johnston 763,403
Harvester, binding and shocking machine, corn, D. T. Phillips 763,629
Harvesting machine grain elevating device, A. Gaspelin 763,854
Hat fastener, C. Dorn 763,862
Hatch cover, R. R. Lacey 763,493
Hay frame loader or unloader, J. B. Young 763,532
Headache, mechanical appliance for cure of, E. A. Turner, Jr. 763,814
Headlight, F. C. & G. L. Wilson 763,648
Heating apparatus, Walz & Doherty 763,705
Heating apparatus, J. Collis 763,724
Heating furnace, C. W. Bray 763,847
Heating furnace, J. Hirschmann 763,892
Heel, boot or shoe, M. Winants 763,649
Hinge, spring, E. Bommer, reissue 12,236
Horseshoe calk, M. R. Jackson 763,669
Horseshoe, R. E. Johnson 763,901
Hose coupling, J. A. Allen 763,652
Hose coupling, W. H. Bailey 763,837
Hose nozzle holder, A. L. Clubb 763,594
Hydraulic intensifier, C. B. Albree 763,833
Hydraulic lift, R. H. Campbell 763,720
Ice cream mold, G. F. Dickson 763,732
Incandescent bodies, means for suspending, E. Kramer 763,678
Induction motor, alternating current, G. B. Dusinberre 763,379 763,547
Insect destroyer, Wiesen & Crisp 763,823
Insecticide compound, O. D. Goodell 763,481
Insulating support for electric third rails, F. R. Slater 763,434
Internal combustion engine, H. C. Waite 763,819
Iron. See Smoothing iron.
Jar, W. S. Teeple 763,810
Jaw wrench, sliding, A. D. Erb 763,470
Jewel mounting, A. A. Boismaure 763,846
Joint, F. E. Greenwood 763,483
Journal box or bearing for roll shafts, S. Hughes 763,399
Key guard, A. Morell 763,920
Knitting, G. Brabrook 763,356
Knitting machine, circular spring needle, E. Wilcomb 763,825
Knitting machine needle and jack, Hurley & Sibbald 763,400
Knockdown case, R. Schouten 763,801
Lace tipping machine, Albrecht & Ringwalt 763,832
Lamp wick raiser, J. Middaugh 763,776
Lantern globe mold, A. B. Houghton 763,758
Latch, gate, P. N. Risser 763,426
Lathe templet controlled turner, J. Hartness 763,886
Leather press, M. A. Holmes 763,895
Life preserver, A. Tabn 763,518
Lightning arrester, G. Babcock 763,350
Lightning rods, apparatus for demonstrating the efficacy of, H. Simpson 763,516
Linotype machine, P. T. Dodge 763,735
Liquid receptable indicator, M. Bray 763,716
Lock for levers in interlocking machines, J. P. Coleman 763,366
Locking bar pipe, C. H. Hoskins 763,898
Loom dobby, Schwarzenbach & Lier 763,432
Loom, filling replenishing, W. I. Stimpson 763,441
Loom, hand, S. H. Woodbury 763,828
Loom harness mechanism, C. E. Nutting 763,418
Loom stop motion, J. M. Grey 763,556

Wood-working Machinery



For ripping, cross-cutting, tapering, grooving, boring, scroll-sawing, edge moulding, mortising; for working wood in any manner. Send for catalogue *A.*

The Seneca Falls Mf'g Co.,
96 Water St., Seneca Falls, N. Y.

ENGINE & FOOT LATHES — **MACHINE SHOP OUTFITS, TOOLS & SUPPLIES** — CATALOGUE FREE — **SEBASTIAN LATHE CO.** 120 CULVERT ST. CINCINNATI, O.

Veeder Counters



to register reciprocating movements or revolutions. Cut full size.

Booklet Free

VEEDER MFG. CO.
Hartford, Conn.

Cyclometers, Odometers, Tachometers, Counters and Fine Castings.

TAKE THE NICKEL PLATE ROAD FOR THE ST. LOUIS FAIR.

Lowest Rates and many unusual privileges. Special $15.00 rate on certain dates. Full information on application to local Agents, or R. E. Payne, General Agent, 291 Main St., Buffalo, N. Y., or A. W. Ecclestone, D.P.A., 385 Broadway, New York.



Marine Motors

If you want a Gasoline Motor, with all the good points and none of the bad, buy a

"RELIABLE"

Either jump or make and break Spark.

Boston Gasoline Engine Co.
134 Broad St., Boston, Mass.

HIGHEST GRADE GREY IRON CASTINGS
For Gasoline Engines and Cylinders
All kinds of Automobile Castings.
FRONTIER IRON WORKS, 2 Auburn Ave., Buffalo, N. Y.

Lackawanna Motors

are Simple and Valveless. Easy to start and easy to operate.

For automobiles and launches.

3 to 24 H.P.

Cut shows Lackawanna Reversing Device attached to our 6 H. P. marine motor. No reversing gear necessary

LACKAWANNA MOTOR COMPANY
51-61 Letchworth St. - - Buffalo, N. Y.

A GOOD INVESTMENT

For **$1.75** we will send by express (not prepaid), complete N. D. Outfit with full instructions for learning

TELEGRAPH OPERATING.

A fascinating study that will enable you to earn good wages. Send for our catalog.

Established 1879.

J. H. BUNNELL & Co., Inc. 20 Park Place New York

Complete Electric Lighting Plant
Price, $34.00

Dynamo only, for eight 16-c.p. lamps, $26.00; lamps, wire, fixtures, etc., $8.00; just suitable for residences, small factories, yachts, etc. A strictly first-class guaranteed outfit. We wind for any special purpose to order, usually without extra cost. Send for Bulletin No. 3.



The Elbridge Electrical Mfg. Co., Water Street, Elbridge, N. Y., U. S. A.

Electric Motor

The Rienco Motor runs at high speed when connected to one cell of almost any kind of battery. It rotates in either direction and is reversed without changing connections. It is fitted with grooved pulley. Price **50c.** Postage and packing 15c. **Motor Outfit No. 8**—consists of 1 Rienco Motor; 1 Rheostat, or speed regulator; 2 Small Dry Batteries and 10 feet of wire. Price **$1.** Postage and packing 30c. Send stamp for catalog.

Ithaca Electric Novelty Co.
Box 33, ITHACA, N. Y.

THE 2½ H.P. WEBER JUNIOR PUMPER

has a capacity of 50 gallons 125 feet and 100 gallons 67 feet. Equals 30 men pumping water. All complete ready to attach to pump. Uses gasoline in proportion to water pumped. Weight 800 lbs. Engine speed 375 revolutions. Can be used for other power purposes. Simple, safe and economical. Outside dimensions, 9 ft. long, 3 ft. wide, 5 ft. high. Capacity, 25 gallons per minute 250 feet.



Weber Gas and Gasoline Engine Co.,
P. O. Box 1114a, Kansas City, Mo.
EASTERN OFFICE, 115 Liberty Street, New York City.

Yankee Spark Plug, $2

FOR GAS ENGINES

Cannot carbonize or short circuit. Compression end cleans point at each explosion. Guaranteed. Everything for the Automobile, Bicycle and Motor Boat.

Big Free Catalogue

E. J. WILLIS CO. 2 Park Place, New York

Eclipse Pocket Ammeter
for general battery testing. 0 to 20 amperes.

Flexible cord attached and contact spur in case, which is **drawn back into case,** when carried in pocket. Size of watch and very light weight. Can be used in any position. Particularly designed for Auto. use. Price **$5.00.**

ELDREDGE ELECTRIC MFG. CO.
223 Main St., Springfield, Mass.



Automatic Machines FOR FORMING WIRE

from coil into shapes similar to cuts. We can furnish machines or goods, as desired.

Send for Catalogue.

BLAKE & JOHNSON,
P.O. Box 7, WATERBURY, CONN.

Loom temple, J. F. Carberry	763,462
Loom temple, P. McPherson	763,619
Loom warp puller, A. Petersen	763,628
Lubricating device, A. G. Elvin	763,599
Lubricating oil, system for distributing and filtering, C. E. Lefebvre	763,681
Lumber matching machine pressure attachment, A. Milne	763,777
Magneto electric generator, B. P. & F. I. Remy	763,510
Mail bag catcher, E. Petter	763,625
Mallet, G. B. Goddard	763,553
Manhole, H. C. Baker, Jr.	763,708
Marble, artificial, Feldhamer & Oelgiesser	763,583
Match, B. Jacob	763,670
Match box, C. F. Peveto	763,667
Mattress frame, F. J. & W. C. Van Cise 763,442	763,443
Megaphone, collapsible, H. Sturges	763,808
Metal extrusion apparatus, Heyl-Dia & Musker	763,559
Mine trap door, J. Wack	763,703
Minerals, separation of, Goyder & Laughton	763,749
Mower folding reel support, E. A. Johnston	763,902
Mowing machine attachment, E. A. Johnston	763,402
Music transposition chart, W. H. Finley	763,870
Musical instrument, automatic, Gilman & Tirrell	763,877
Nailing machine, C. F. Pym	763,927
Nitramins with formaldehyde and a product thereof, reacting on, Homolka & Erber	763,756
Nitrous anhydrid and nitrates, making, H. von Keler	763,491
Nut lock, C. A. Kocab	763,677
Nut lock, W. V. Wesson	763,821
Nut lock, J. D. Franklin	763,874
Nut lock, J. M. Schofield	763,932
Ore concentrating table, G. A. Overstrom 763,786	763,787
Ore separator and concentrator, C. Van Hoesen	763,441
Overalls, J. Landers	763,647
Overshoe holder, J. Stawartz	763,654
Packing, E. A. Horn	763,398
Pail, dinner, H. Sobey	763,487
Pail, slop, E. Pierce	763,924
Pan. See Bake pan.	
Panel, metal ceiling, Caldwell & Jaeger	763,852
Paper box machine feed attachment, C. Shuman	763,943
Paper feed roll mechanism, S. J. Seifried	763,514
Paper hanger or bill poster, Kerns & Ackley	763,768
Paper roll holder, sample, F. Hawke	763,394
Pegging machine, J. F. Davey	763,466
Pen, H. W. Stone	763,517
Pencil, lead, C. von Schemuitzky	763,429
Piano pedal support and bearing, I. Larsen	763,680
Pianoforte action, P. Krumscheid	763,910
Picture hanger, C. Winter	763,448
Piling, M. R. Vanderkloot	763,526
Pin tongue, D. A. Seligman	763,805
Pipe and nut wrench, J. Rumery	763,427
Pipe dressing machine, O. Quandt	763,568
Pipe joint, Crawford & Gordon	763,542
Pipe repairer, G. W. Switzer	763,809
Pitman, J. L. Scott	763,802
Plane iron adjusting device, Carleton & Trask	763,721
Planter, corn, R. E. Elliott	763,867
Pliers, wire tightening, R. E Quick	763,507
Plunger elevator, C. E. Oschger	763,782
Pocket case, F. Christian	763,722
Polishing machine, G. A. Ensign	763,743
Potential varying and current reversing apparatus, M. Laur	763,615
Printer's quoin, J. Ruesch	763,637
Printer's ink fountain, J. W. Eggleston	763,866
Printing and embossing presses, wiping device for plate, W. O. Down	763,544
Printing press, W. Fullard	763,552
Printing press, W. G. Johnston	763,672
Printing press, H. F. Bechman	763,840
Printing press, platen, R. E. & A. Kemper	763,405
Projectile, chambered, C. F. & H. E. Cowdrey	763,370
Pulley, friction clutch, J. T. Cyr	763,596
Pulley hub and bushing, self-oiling loose, E. A. Lind	763,409
Pulley, sash, J. Duffy 763,545,	763,546
Pulverizing machine grate, Schoellhorn & Albrecht	763,639
Pump, T. Stebbins	763,935
Pump controlling apparatus, G. V. Ellis	763,741
Pump, double acting deep well, W. B. Erb	763,664
Pump, inflating, H. K. Austin	763,707
Pump, liquid, H. Collins	763,367
Pumping apparatus, adjusting device for oil well, F. P. Myers	763,621
Purse and hose supporter, combined, Tayler & Flint	763,519
Quoin lock, Banse & Knapp	763,709
Radiator, J. W. Brown	763,591
Rail bending tool, hydraulic, C. Wigtol	763,531
Rail joint, H. C. Hunt	763,668
Rail joint, D. O. Brunner	763,848
Rail lubricator, M. W. Bird	763,537
Rail support, J. T. Shannon	763,640
Rails, contact device for under-contact third, F. R. Slater	763,435
Rails, etc., timber joint for guard, W. F. Spillman, Sr.	763,933
Railway crossing gate, M. J. Vernet	763,702
Railway frog, J. Ford	763,872
Railway or farm gate, E. D. Mills	763,499
Railway signal, J. P. Coleman	763,540
Railway signaling means, H. A. Johnson	763,766
Railway signaling system, automatic, W. N. Owen	763,420
Railway switch, electric, Gray & Brand	763,390
Railway signals, electrically controlled automatic block system for operating, A. Oesterreicher	763,921
Railway switch, etc., fluid pressure actuated, G. W. Whiteman	763,822
Railway third rail, electric, J. Caesar	763,364
Railway tie, A. M. Bowman	763,538
Railway train operated time signal system, W. B. Severance	763,515
Railway wagon balance, N. Jeppsson	763,671
Rake, H. C. Hart	763,885
Range, Q. Crane	763,541
Range, coffee, J. A. Forney	763,473
Reaping machine, J. Berglund	763,712
Recoil check, Meigs & Stout	763,775
Refining engines, apparatus for returning stock to, S. R. Wagg	763,818
Reflector, prism glass shade, O. A. Mygatt	763,688
Reflector shade for artificial lights, O. A. Mygatt	763,689
Rein support, W. Schluter	763,570
Retort lid, C. F. A. Hentschel	763,752
Revetment, R. B. McGregor	764,503
Revolver, D. B. Wesson	763,581
Rifle wind gage sight, J. T. Peddle	763,790
Ring. See Curtain ring.	
Rinsing device, W. H. Walter	763,647
Rivet holder, pneumatic, A. L. Hastings	763,887
Road, dustless, Barr & Rees	763,457
Rocking chair, J. P. Hokans	763,667
Rod connection, C. H. Knobbs	763,676
Rotary engine, H. T. Dunn	763,865
Rotary motor, H. Van Beresteyn	763,525
Rotary motor, J. Pattinson	763,789
Rotative motor, F. Exline	763,868
Rubber article forming machine, C. E. Longden	763,682
Rubber boots and shoes, vulcanizing India, A. D. Field	763,550
Rubber gasket making machine, F. E. Harthan	763,558
Rule attachment, A. S. Liddle	763,915
Rule, measuring, J. A. & F. L. Traut	763,523
Safety hook or ring, D. L. Troyer	763,813
Salt cellar, W. B. Grimes	763,750
Sash cord guide, W. R. Fox	763,474
Sash fastener, M. L. Gordon	763,879
Sash lock, C. Johnson	763,610
Sash, window, A. C. Goddard	763,747
Sawing machine, wood, C. Holmstrom	763,488
Scaffold, E. M. Hopkins	763,757
Scaffold, L. H. & T. H. Harpin	763,884
Sealing machine, envelop, Sevl & Butts	763,697
Sealing wax melting and applying device, S. J. Johnson	763,767
Secondary battery, J. W. Madigin	763,565
Seed separator and cleaner, cotton, W. L. Crowson	763,858
Sewing machine attachment, G. L. Green	763,880
Sewing machine feeding mechanism, D. Noble	763,624
Sewing machine, two-needle, W. A. Mack	763,497
Shade roller bracket, P. G. Chayer	763,365
Shaft and clip, vehicle, Wilcox & Hunter	763,582

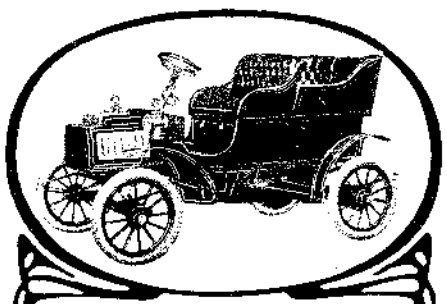

A Rambler Reflection

Thousands of people who are considering the purchase of an automobile want a machine that is strong—powerful—easy riding—simple—durable—graceful and up-to-date. **Model "H,"** here illustrated, has full elliptic springs, two powerful brakes, 28-inch wheels, 3-inch tires, 81-inch wheel base, large cylinder engine of seven actual horse power. It will carry four people over any kind of road in any kind of weather. Fitted with two lamps and horn, **$850.00** at the factory.

Six different models, $750.00 to $1,350.00 at the factory. Write for the new Art Catalog.

THOMAS B. JEFFERY & COMPANY
Kenosha, Wisconsin, U. S. A.

Chicago Branch, 304 Wabash Avenue
Boston Branch, 145 Columbus Avenue

IF YOU SHOOT A RIFLE, *Pistol or Shotgun,* you'll make a **Bull's Eye** by sending three 2c. stamps for the *Ideal Hand-book* "A," 126 pages **FREE.** The latest Encyclopedia of *Arms, Powders, Shot and Bullets.* Mention SCIENTIFIC AMERICAN. Address

IDEAL MFG. CO., 26U St., NEW HAVEN, CONN., U.S.A.

World's Fair Visitors

Will profit by adding a trip to Colorado, Utah or the Pacific Coast, touring the delightful Rocky Mountain region via the

Denver & Rio Grande Railroad,

which has more scenic attractions, mountain resorts mineral springs, and hunting and fishing grounds, than any other line in the world.

The invigorating climate of Colorado makes it especially inviting for a summer vacation. As health resorts Manitou, Colorado Springs, Glenwood Springs, and Salt Lake City, are world-famed.

Low excursion rates prevail to Colorado and Utah, via all lines, allowing liberal stop-overs at and west of Colorado points.

Through car service from St. Louis and Chicago to Colorado, Utah, and California points. Superb dining cars, service a-la-carte, on all through trains. Beautifully illustrated booklets will be sent free on application to

S. K. HOOPER, G. P. & T. A.
Denver, Colo.



MORRIS & RUSHTON Boats and Canoes. We have in stock the most complete assortment of High Grade Cedar and Canvas-covered Boats and Canoes ever seen in this city. Also Firearms and Sporting Goods of every description. Send for catalogue.

The H. & D. Folsom Arms Co., 314 Broadway, NEW YORK

STIMULATION without IRRITATION
Means New Life to the Scalp.

The Evans Vacuum Cap gives the scalp a thorough massage and encourages a free and healthful circulation without rubbing and without the use of drugs or irritants. It will stop hair from falling out and restore a normal growth where live follicles exist. The Cap is used about ten minutes twice a day and its effects are pleasant from the very beginning. We will refund your money in full if results are not satisfactory after a thirty days' use. Call on or address

EVANS VACUUM CAP CO.
ST. LOUIS OFFICE, Fullerton Building.
NEW YORK OFFICE, 1300 Broadway.

NOTE: To those who find it convenient to call at our offices we will give a sufficient number of demonstrations free to satisfy them as to the merits of this appliance.

THE MIETZ & WEISS KEROSENE and GAS ENGINE

Sizes from 1 to 60 H. P.



Send for Catalogue.

burns **KEROSENE** cheaper and safer than gasoline. Automatic, simple, reliable. **No** electric battery or flame used. Perfect regulation. Belted or directly coupled to dynamo for electric lighting, charging storage batteries, pumping and **all power purposes.**

A. MIETZ,
128-138 MOTT ST., NEW YORK.

ADOPTED BY U. S. GOVERNMENT.

Highest Award, direct coupled Generator Set, Paris Exposition, 1900.

Gold Medal, Pan American Exposition, 1901. **Gold Medal,** Charleston, S. C., Exposition, 1902.

GAS ENGINE IGNITERS



Price, $15.00

LATEST TYPE. BEST MADE.

For Marine, Automobile or Stationary Engines. Fully Guaranteed. Write for Circular.

The Carlisle & Finch Co.,
233 E. Clifton Ave., Cincinnati, Ohio



The CURTISS double cylinder 5 horse-power MOTOR

Weight 60 lbs. List price $150.00. The most powerful cycle motor in the world. Holds World's Record of 10 miles in 8 m. 54 2-5 sec. Catalog of motors and complete motor cycles free.

G. H. Curtiss Mfg. Co.,
HAMMONDSPORT, N. Y.

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.

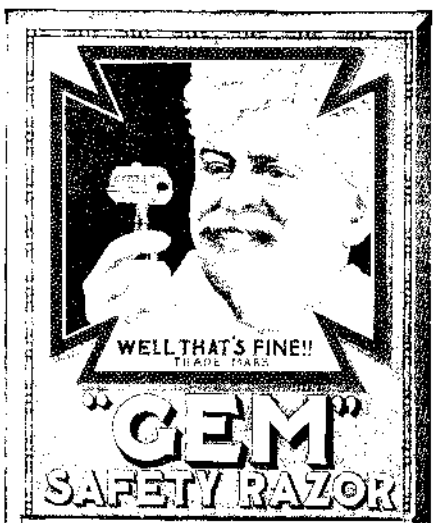

Use the **"GEM"** it's the pleasantest, easiest, quickest, safest way to shave.

Mechanically perfect—finest English cutlery steel blades tested.

Write for interesting FREE Booklet for shavers.

Price, complete outfit	$2.00
Set of Seven Gem Guards, covering two blades	3.50
Stropping Machine and Strop	2.00

At leading dealers or direct on receipt of price.

Gem Cutlery Co., Dept. J, 34 Reade Street, New York.

WATER, 25 Bbls. for 1c.

Greatest Air-Cooled Wonder of the day. Operates any kind of pump. Runs any kind of machinery. No water to freeze. No tanks to bother. Simplest in construction. Most reliable in work. Don't fail to write for circulars and prices to

THE AIR-COOLED MOTOR CO., Lansing, Mich.

The Apple AUTOMATIC

For Gas Engines, Launches, Automobiles, etc.



No more belt, battery and commutator troubles. Dirt and waterproof. Easily attached increases power and speed. Send for full particulars on our ignition apparatus.

The Dayton Electrical Mfg. Co. 88 Reibold Bldg., Dayton, Ohio. SPARKER

Send For It To-Day

You'll find it always convenient to have as a useful and instructive book

Montgomery & Co.'s Tool Catalogue

The new edition has 704 pages and is copiously illustrated. Pocket size 6¼x4½ ins. Sent by mail for 25c.

MONTGOMERY & CO.,
105 Fulton St., New York City.

THE OBER LATHES

For Turning Axe, Adze, Pick, Sledge, Hatchet, Hammer, Auger, File, Knife and Chisel Handles, Whiffletrees, Yokes, Spokes, Porch Spindles, Stair Balusters Table and Chair Legs and other irregular work.

Send for Circular A.

The Ober Mfg. Co., 10 Bell St., Chagrin Falls, O., U.S.A.



Angle Benders

we make hand-power benders for forming angles in stock 1 in thick and under. Light stock can be bent cold.

WALLACE SUPPLY COMPANY
910 Royal Insurance Building, CHICAGO

Squabs Pay Beat Hens

Easier, need attention only part of time, bring big prices. Raised in one month. Attractive for poultrymen, farmers, women. Send for **FREE BOOKLET** and learn this *immensely rich home industry.*

PLYMOUTH ROCK SQUAB CO., 289 Atlantic Ave., Boston, Mass.

WE BUILD MACHINES

We have the advantage of having a large and perfectly appointed shop in a town where expenses are very light; and our customers profit by it. We are expert designers of experimental machinery, and are equipped to manufacture in quantities.

MARVIN & CASLER CO.,
Dept. L. **Canastota, N. Y.**



This **Insisting and Compelling**

Electrical Alarm Clock

awakes you in spite of yourself. Rings for hours unless stopped. Complete outfit, **$3.50.** Electric bell attachment for ordinary clock, $1.50

SEND FOR FREE CATALOGUE.

GANNETT ELECTRICAL CO.,
90 Weybosset St., Providence, R. I.

BICYCLES FOR SALE

At Prices All Can Pay

9,000 wheels to be sold this month. Factories have gone down with a crash. Dealers are swamped. We are seizing lot after lot for defaulted storage.

5,000 Bicycles, $12.50, $15, worth $25 to $30.

4,000 Bicycles, $18 to $25, worth $35 to $50.

Manhattan Racers, $25. Regular $50 wheel, with coaster brake.

Second-Hand Bicycles, $5 up. In this lot are fine police wheels from Philadelphia and Baltimore. Some very slightly used.

98 cents for $2 Tires. A special sale. An unpaid storage seizure cuts prices. Other tires, $1.25, $1.50, $2

$3 Lamps, 68 cents. Great factory clearing sale. $1 worth of sundries for 40c. See famous bargain windows.

MANHATTAN STORAGE CO.
No. 42 Cortlandt Street, New York, N. Y.

Williams' Shaving Stick

signifies—Perfection.

Williams' Shaving Sticks, Shaving Tablets, Toilet Waters, Talcum Powder, Jersey Cream Toilet Soap, etc., sold everywhere

Write for booklet "How to Shave"

THE J. B. WILLIAMS CO.
GLASTONBURY, CONN.

Valuable Books

REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia

Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.



This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

TWENTY-THIRD EDITION

EXPERIMENTAL SCIENCE.

By GEORGE M. HOPKINS

Revised and Greatly Enlarged. 2 Octavo Volumes. 1,100 Pages. 900 Illustrations. Cloth Bound, Postpaid, $5.00. Half Morocco, Postpaid, $7.00. Or Volumes Sold Separately: Cloth, $3.00 per Volume; Half Morocco, $4.00 per Volume.

EXPERIMENTAL SCIENCE is so well known to many of our readers that it is hardly necessary now to give a description of this work. Mr. Hopkins decided some months ago that it would be necessary to prepare a new edition of this work in order that the many wonderful discoveries of modern times might be fully described in its pages. Since the last edition was published, wonderful developments in wireless telegraphy, for example, have been made. It was necessary, therefore, that a good deal of new matter should be added to the work in order to make it thoroughly up-to-date, and with this object in view some 200 pages have been added. On account of the increased size of the work, it has been necessary to divide it into two volumes handsomely bound in buckram.

Practical Pointers For Patentees

Containing Valuable Information and Advice on

THE SALE OF PATENTS

An Elucidation of the Best Methods Employed by the Most Successful Inventors in Handling Their Inventions.

By F. A. CRESEE, M. E.

144 Pages. Cloth. Price, $1.00.

APPLETON'S

Cyclopedia of Applied Mechanics

A Magnificent Set in Three Vols.

Handsomely bound in half morocco, each volume containing over 900 pages, with nearly 8,000 engravings, with full explanatory details.



Special Offer!

Heretofore the publishers' price of this work has never been less than $22 50 and sold only by subscription. We have secured a special edition of this valuable work, and will box and ship, *prepaid*, the three volumes to any address in the United States or Canada on receipt of

$12.00

By purchasing *now from us* you save half the original price and have in return a technical cyclopedia and dictionary, the great usefulness of which has been testified to by nearly 100,000 purchasers of this valuable work—technicians and mechanics who refuse to estimate its value to them in their work by mere dollars and cents.

☞ *Add $1 extra for expressage to England and the Continent, or $2 extra to Australia and other countries.*

☞ *Special circular of contents of these volumes sent free*

MUNN & CO.

361 Broadway New York City

Sharpener, knife, A. W. Johnson	763,741
Shingle machine, O. E. Zipperer	763,585
Shoe turning machine, W. C. Meyer	763,620
Shuttle swell, Duckworth & Sunderland	763,468
Sight testing apparatus, Reinhard & Scheinman	763,929
Signal, H. L. Jennings	763,563
Signal device, J. J. Fuller	763,603
Signaling and recording system, automatic train, Wood & Shamberger	763,939
Signaling system, selective, G. Babcock	763,351
Skins, bating or puring, O. P. Amend	763,347
Sled, H. W. Tousey	763,521
Sled draft mechanism, traction, N. E. Brown, reissue	12,238
Smoothing iron, J. Feldmeyer	763,384
Snow plow, adjustable, E. T. Bushley	763,592
Soap saving device, G. L. Catalde	763,463
Sound collecting and magnifying device, C. H. Viggars	763,575
Sound recording apparatus, J. W. Jones	763,903
Sound records, production of, J. W. Jones	763,564, 763,904
Spinning or other machinery, drawing mechanism for, W. H. Drury	763,863
Spoke extractor, W. G. Pfeiffer	763,423
Spring, M. H. Naber	763,505
Square, folding, J. Offermann	763,419
Stamp, hand, W. A. Force	763,551
Stamp, hand, C. A. Fox	763,873
Stand or support, T. E. Barrow	763,838
Steam boiler, S. T. J. Bray	763,359
Steam generator, T. W. Barber	763,655
Steam trap, S. Belt	763,843
Steering apparatus, E. E. Taylor	763,701
Stereoscopic apparatus, V. S. L. Owen	763,788
Sterilizer, F. E. Stilwell	763,936
Stone mold, artificial, A. Lake	763,679
Stop mechanism, C. A. Juengst	763,673
Stove, gas, H. H. Brown	763,363
Stove grate, A. Alitto	763,454
Stove, heating, E. R. Cahoon	763,851
Stove oven, gas, gasoline or oil, E. D. Harris	763,751
Stovepipe ventilator, W. P. Garrison	763,476
Sulfids from ores, apparatus for extracting, G. B. Delprat	763,662
Switchboard apparatus, W. Kaisling	763,404
Telegraphy, apparatus for wireless, G. Marconi	763,772
Telegraphy, submarine, I. Kitsee	763,908
Telegraphy, wireless, W. S. Hogg	763,893
Telephone exchange signaling system, C. E. Scribner	763,803
Telephone receiver and transmitter, combined, J. G. Holmstrom	763,755
Telephone system, W. M. Davis	763,374
Telephone system call register, Lattig & Goodrum	763,911
Telescope adjustment, R. Seelig	763,433
Tentering machine, A. McLean	763,415
Thawing frozen ground, portable apparatus for, C. W. Joyce	763,612
Therapeutical purposes, electrical apparatus for, J. P. Brown	763,657
Thermostatic device, C. F. Hilkier	763,754
Thill coupling, L. J. Dillon	763,734
Threshing machine, Davis & Lehenbauer	763,731
Threshing machine, pea, Briggs & Sitts	763,361
Ticket system, traffic, J. F. Ohmer	763,922
Tie. See Cross tie.	
Timber, drying, A. Gray	763,482
Tire covering, pneumatic, G. F. Brown	763,539
Tire, rubber, A. S. Kretz	763,909
Tire, vehicle wheel, J. Alleatti	763,536
Tobacco pipe, C. W. McKinney	763,504
Tobacco press, plug, G. W. Forberg	763,744
Tool, compound, A. L. Gheen	763,7[illegible]
Tool feed and speed changing device, machine, Le Blond & Groene	763,770, 763,812
Tool hand, W. W. Barton	763,352
Tool holder, B. Hepp	763,605
Toy, T. Petersen	763,422
Toy bench or settee, G. H. Lennon	763,617
Track sander, W. M. Deal	763,543
Track switch, E. Smith	763,806
Trap, O. B. Burroughs	763,850
Trolley, Hunsinger & Dewald	763,759
Trolley guard and finder, W. F. Reichenbach	763,509
Trolley pole, A. S. Weaver	763,820
Trousers stretcher, A. Helmer	763,608
Truck, A. O. Smith	763,698
Trunk, E. W. Hawley	763,395
Tubes or hollow bodies, manufacture of, B. F. McTear	763,566
Turbine impulse wheel, fluid pressure, Hodgkinson & Frik	763,397
Turbine, steam, W. L. Pope	763,425
Turbine, water, E. Roth	763,695
Twine holder, S. J. Curry	763,729
Typewriter, J. Alexander	763,452
Typewriter carriage mechanism, F. X. Wagner	763,529
Typewriter paper controller, J. H. Cornelison	763,660
Typewriter ribbon mechanism, F. X. Wagner	763,938
Typewriters, etc., universal bar mechanism for, F. X. Wagner	763,528
Typewriting machine, B. C. Stickney	763,699
Typewriting machine, O. C. Kavle	763,906
Typewriting machine, paper controller, J. H. Cornelison	763,661
Upholstery spring support, J. Hoey	763,607
Valve, E. R. Stoddard	763,643
Valve, balanced hydraulic, F. Hennebohle	763,889
Valve, fluid pressure reducing, F. L. Dodgson	763,375
Valve gear, S. L. McCain	763,502
Valve, high pressure, H. B. Robinson	763,694
Valves or other like purposes, machine for facing, F. L. Smith	763,642
Vehicle attachment, W. H. Wansbrough	763,530
Vehicle body, C. C. Adelsperger	763,251
Vehicle brake, automatic, T. & L. Edwards	763,739
Vehicle front gear, C. G. Streich	763,700
Vehicle lap robe holder, E. Blickensderfer	763,459
Vehicle, motor, F. Schlais	763,931
Vehicle safety horse release, F. C. Goettert	763,480
Vehicle spring, C. A. Behlen	763,842
Vehicle steering mechanism, J. Morig	763,500
Vehicle wheel, cycle or other, J. E. Wahlstrom	763,576
Vending apparatus, coin controlled liquid, M. A. van der Wielen	763,645
Vending machine, F. Lynes	763,413
Vending machine, Baker & Mercer	763,456
Vessel top, P. Lindemeyr	763,618
Veterinary surgeon forceps, J. F. Hemphill	763,396
Vine cutter, S. V. Jeffords	763,763
Vise, floor, J. M. Butcher	763,941
Voting machine, N. Smith	763,436
Wagon, platform, S. L. Greene	763,555
Wall and blocks for forming same, building, W. Whitmore	763,945
Watch, B. Redepenning	763,508
Water closet, L. M. Hooper	763,561
Water closet seat, H. H. Phillips	763,791
Water fountain, ornamental, J. Keith	763,614
Water gage, J. J. Aull	763,588
Water gage shield, glass, P. Layton	763,408
Water heater and garbage crematory, A. Long	763,410
Water tower, J. Curry	763,372
Water wheel governor, D. W. Starrett	763,572
Weighing machine, M. Hofmann	763,560
Well drilling machine, H. H. Wilburn	763,824
Whirler, G. W. Hinton	763,487
Wind motor, J. H. Ravelli	763,795
Wind or water motor, W. B. Nance	763,623
Windmill pitman and means for its automatic lubrication, W. P. Brett	763,360
Window cleaner or the like, H. A. Hayden	763,888
Window construction, E. H. Lunken	763,496
Window construction, Hausfeld & Lunken	763,484
Window, horizontally pivoted, H. E. Essig	763,471
Window protector, F. O. Carlson	763,853
Wire stretcher, Ferguson & Prevost	763,549
Woven fabric formed chiefly of leather fibers, W. H. Drury	763,737
Woven fabric formed of fibrous materials, W. H. Drury	763,864
Wrench, R. J. Berthoud	763,590
Yarn formed of fibrous materials, W. H. Drury	763,377
Yarn from fibrous materials, machinery for manufacturing, W. H. Drury	763,378

DESIGNS.

Bag frame member, C. Flax	37,011
Knife, table, J. J. A. Munro	37,007

"Get out of the old ruts"

Don't put up with bad roads that are always dusty or muddy and need constant repairing. Such roads have been endured for years, only because there was nothing better. All this is now changed by

The Steel Highway Track

the greatest road improvement that was ever made.

Its first cost is less than an ordinary stone road and the cost of maintenance is reduced to a minimum—no constant repairing.

Insures a good, hard, smooth road all year round, free from dust and mud.

Enables one horse to easily pull a load that would require at least six horses on a good macadam road. Better for the horses and makes travel easier for vehicles of every kind.

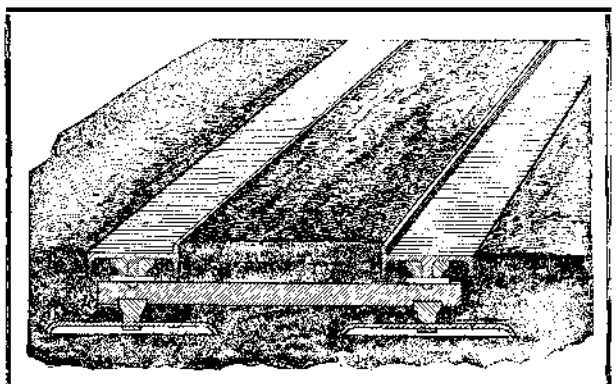

Here is a picture of the *Steel Highway Track*—no wood or bolts; all metal, interlocking and practically indestructible

Are you interested in this new road that means so much to all tax-payers and owners of vehicles of every kind? Then write for booklet "A" containing full information and

"Let us put you on the Right Track"

STEEL HIGHWAY TRACK CONSTRUCTION CO.

Main Offices: 758 Drexel Building, Philadelphia

Don't Drink Dirty Water

The best way to be sure is to filter it. Sometimes it **looks clean** when it isn't. Be on the right side and protect yourself and your family from the possibility of water contamination by always using a

Berkefeld Filter

in your home. Scientifically constructed. Furnishes one gallon of absolutely pure drinking water in four minutes. Easy to clean and care for.

BERKEFELD FILTER CO., 4 Cedar Street, New York

B. F. BARNES DRILL AND LATHE BUILDERS COMPANY ROCKFORD, ILL. U.S.A.

THE MERKEL MOTOR CYCLE



For pleasure or business is quickest, most convenient, safest and cheapest. Long rides made without tiring yourself.

Durability, simplicity and economy are combined in the Merkel.

Write for our Free Booklet.

THE D. MERKEL MFG. CO.,
Factory, Layton Park, Milwaukee, Wis.

ELECTRIC SEWING MACHINE MOTOR.—The instructions and numerous illustrations of details contained in this article will enable any mechanic of average ability to build an efficient motor that will operate a sewing machine. The cost of materials for this machine should not exceed five dollars. See SCIENTIFIC AMERICAN SUPPLEMENT, No. **1210.** Price 10 cents by mail, from this office and from all newsdealers

WORK SHOPS

of Wood and Metal Workers, without steam power, equipped with

BARNES' FOOT POWER MACHINERY

allow lower bids on jobs, and give greater profit on the work. Machines sent on trial if desired. *Catalog Free.*

W. F. & JOHN BARNES CO.
Established 1872.
1999 RUBY ST., ROCKFORD, ILL.

GAS ENGINE CASTINGS

for the Franklin One-Half Horse Power Gas Engine

Castings, materials, drawings, etc., for amateurs. An ideal motor for practical use. Not a toy. Complete set of castings, etc., for either horizontal or vertical type, **$16.50.** Send for illustrated booklet No. 9.

PARSELL & WEED, 129-131 W. 31st St., N. Y. City

The Right Hand of the Busy Man is the minute hand on an

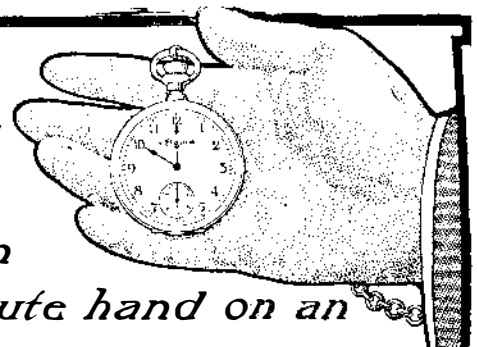

ELGIN WATCH

Every Elgin Watch is fully guaranteed. All jewelers have Elgin Watches. "Timemakers and Timekeepers," an illustrated history of the watch, sent free upon request to

ELGIN NATIONAL WATCH CO., ELGIN, ILL.

Founded by Mathew Carey, 1785.
A House in touch with Three Centuries.

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS.
810 Walnut St., Philadelphia, Pa., U.S.A.

☞ *Our New and Revised Catalogue of Practical and Scientific Books, 94 pages, 8vo; a Catalogue of Books on Metallurgy, Mining, Prospecting, Mineralogy, Geology, Assaying, Analysis, etc.; a Catalogue of Books on Steam and the Steam Engine, Machinery, etc.; a Catalogue of Books on Sanitary Science, Gas Fitting, Plumbing, etc., and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to anyone in any part of the world who will furnish his address.*

Columbia

Electric and Gasoline Automobiles present the most perfect combination of the arts of vehicle and motor building. The body and furnishings of each **COLUMBIA**, no less than its locomotive parts, reflect the best ideas of the best designers, and the highest order of skilled workmanship



Our artistic Catalogue of Columbia High and Medium Powered Gasoline Cars and Electric Pleasure Vehicles will be sent to any address on application; also separate catalogues of our Electric Town Carriages of the coach class and Electric Commercial Vehicles.

ELECTRIC VEHICLE CO., Hartford, Conn.
NEW YORK 134-138 West 38th St. | CHICAGO 1413 Michigan Ave. | BOSTON 74 Stanhope St.
Member Association of Licensed Automobile Manufacturers

Write To-day

for a **Dean Boiler Tube Cleaner** for a free trial.

After trying it, if you wish to buy, we will guarantee the cleaner to at least pay for itself in six months' use or refund your money. "Economy in the Boiler Room" tells about it. We send it free.

WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

THE INTERNAL WORK OF THE Wind. By S. P. LANGLEY. A painstaking discussion by the leading authority on Aerodynamics, of a subject of value to all interested in airships. SCIENTIFIC AMERICAN SUPPLEMENTS **946** and **947**. Price 10 cents each, by mail. Munn & Company, 361 Broadway, New York City, and all newsdealers.

IF YOU NEED A GOOD OILSTONE



Try an INDIA. Guaranteed to give satisfaction or money returned

Size.	By Mail.	Size.	By Mail.
8x2x1	$1.10	4½x1½x⅝	$0.50
7x2x1	85	3x1x½	40

Send for Price List

THE PIKE MFG. CO. - PIKE, N. H.
New York Store, 151 Chambers Street

SKEDOODLE

Socket Plugs fit any electric sign or show window fixture, and hold a common electric bulb 8 or 16 candle power automatically winking the light on and off five to fifteen times a minute. Anybody can put in place. No skill required. An electric flashing effect for everybody at low cost. Send seventy-five cents for sample. Sold by electricians and fully guaranteed.

THE PHELPS CO., 18 State St., Detroit

This Tool is Polished and Nickel-Plated

"You Cannot Stumble at Any Step of the Temple"

in measuring with this combination Triple-Beam Roller Gauge. A great convenience and a labor saver for single, double or triple measurements. $1.25 each, postpaid.

GOODELL-PRATT COMPANY Greenfield, Mass.

50 Years' Experience

PATENTS

Trade Marks, Designs, Copyrights, Etc.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through MUNN & Co. receive *Special Notice*, without charge, in the

Scientific American

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers

MUNN & CO. 361 Broadway, **New York**
Branch Office 625 F St. Washington, D. C.

Paper weight, Paulsen & Heinbockel	37,010
Rug, A. W. Bosch	37,013
Rug, J. A. Gillies	37,014
Rug, E. Hill	37,015
Rug, H. A. Miller	37,016
Rug, W. Reinhardt	37,017
Rug, R. D. Stevens	37,018, 37,019
Shade for illuminating devices, F. L. Perkins	37,012
Spoons, forks or similar articles, handle for W. C. Codman	37,006
Tea or coffee pot or similar article, A. Steffin	37,008
Tray, A. Steffin	37,009

TRADE MARKS.

Bitters, Carmeliter Stomach Bitters Co.	42,890
Bolts, their parts and appliances, expansion, Star Expansion Bolt Co.,	42,908, 42,909
Boots and shoes, leather, George E. Keith Co.	42,878
Braids, certain named, Sutcliffe & Swift	42,874
Bridles and sets of harness, G. Gibson	42,880
Canned and bottled fruits and vegetables, Seeman Bros.	42,883
Canned sardines and sprats, "Excelsior" Societe Anonyme Commerciale Industrielle et Maritime	42,917
Cartridges, Austin Cartridge Co.	42,911, 42,912
Cider, American Fruit Product Co.	42,887
Circuit controller or switches, Albert & J. M. Anderson Mfg. Co.	42,926
Cleaning and polishing preparations, certain named, W. B. Tyler	42,924
Cleaning compound for certain named purposes, F. S. Bacon	42,923
Cleansing compounds, certain named, M. M. Hodges	42,885
Coats, vests, pantaloons and overcoats for boys, Greenstein, Simon & Leerburger	42,915
Coffee, W. Childs, Jr.	42,918
Corsets, J. Siegel & Co.	42,877
Disinfectant, odorless liquid, Norman C. Hayner Co.	42,902
Electrical apparatus, certain named, H. O. Swoboda	42,906
Fencing, wire, Pacific Steel and Wire Co.	42,930
Floor mats, certain named, Keystone Wire Matting Co.	42,881
Flours, certain named, S. Hamill Company.	42,882
Insect repellent, combustible, Culecide Company	42,905
Malt preparations, legumine, Sussmann & Hoffmann	42,888
Medical preparations for certain named diseases, Pineule Medicine Co.	42,893
Medicinal absorbents, certain named plastic, Dr. Van Vleck Co.	42,900
Medicinal salve, Larkey & Pitt	42,901
Medicine for the cure of certain named diseases, liquid, M. P. Blair	42,898
Medicine for treatment of the blood and viscera, East India Chemical Co.	42,892
Medicines, certain named, C. F. Keller, Jr.	42,891
Meters, certain named, Controller Company of America	42,928
Peanuts, salted, D. Auerbach & Sons	42,884
Poisons for animals, K. Weiss	42,904
Powder for certain named diseases, effervescent, Gotham Chemical Co.	42,899
Powder, tooth, McKesson & Robbins	42,921
Remedies for asthma, L. di Nola	42,897
Remedies for certain named diseases, American Drug Co.	42,895
Remedy for certain named diseases, Pineule Medicine Co.	42,894
Remedy for diseases among live stock and poultry, Nitroline Manufacturing Co.	42,903
Remedy for ear affections, J. W. Evenden	42,896
Rings, Stone Bros.	42,873
Rock drills and hammers, pneumatic, M. Hardsegg	42,907
Roofing felt prepared in asphalt and gravel, Argen Asphalte Co.	42,910
Roofing material, certain named, Eastern Granite Roofing Co.	42,929
Rouge, Allison & Lamson	42,920
Rubber shoes and goloshes, India, Gesellschaftische Handels-Gesellschaft	42,916
Sewing machines, Abraham & Straus	42,927
Sheetings, drills and flannels, cotton, American Trading Co.	42,875
Slippers, Capital Knitting Co.	42,879
Telephone tolls, devices for receiving, Controller Company of America	42,925
Toys, A. Schoenhut Co.	42,913
Undershirts or undervests, infants', M. Lowenthal & Brother	42,914
Vehicles for pleasure use, light road, Premier Manufacturing Co.	42,931
Washing fluids, L. Bloomer	42,886
Washing powder, W. K. Bellis	42,922
Waterproof textile fabrics, Hirsch Brothers.	42,876
Whisky, W. A. Gaines & Co.	42,919
Whisky, rye, J. L. Kennedy	42,889

LABELS.

"Banner Phenyle," for phenyl, Great Western Oil Co.	11,192
"Bu Ko," for tea, A. Lubarsky	11,182 to 11,184
"Bushee Home Cure," for blood medicine, G. H. Bushee	11,197
"Caruso," for cigars, J. E. Doherty & Co.	11,178
"Capitol," for flour, J. D. Warren's Sons.	11,188
"Confection of Senna," for medicine, J. Boot	11,196
"Dr. Wamba's Elixir," for medicine, C. Hunt	11,195
"Dublin Stout," for stout, R. A. Beatty	11,181
"First Justice John Marshall," for cigars, Central Lithograph Co.	11,179
"Gold Medal," for paper bags, Union Bag & Paper Co.	11,201
"Gordon's Improved Borax Axle Soap," for axle soap, R. W. Gordon	11,191
"Grand Opera," for cigars, Schmidt & Co.	11,177
"Klenzine," for cleaning preparation, F. E. Johnson Co.	11,190
"Little Havana," for stogies, Clarksburg Stogie Co.	11,174
"Mexican Curio Candy," for candy, Border Importing Co.	11,185
"Oswald's Lettuce Headache Cure," for medicine, A. E. Barrett	11,194
"Ota-Coa," for breakfast food, M. Lowenthal	11,187
"Ravendock Hair Tonic and Scalp Vitalizer," for hair tonic, F. H. McGuire	11,198
"Red Berry Brand," for canned goods, foods and relishes, J. J. Loughery	11,186
"Red Feather," for incandescent mantles, Raritan Mantle Co.	11,189
"Sta-Kleen," for tooth brushes, J. C. Dowd & Co.	11,199
"T. C. S. Co.'s Cubans," for stogies, Clarksburg Stogie Co.	11,175
"T. C. S. Co.'s Old Plantation Havana Cigars," for cigars, Clarksburg Stogie Co.	11,176
"Whalebone," for paper bags, Union Bag & Paper Co.	11,200
"Who-Who," for a game, W. P. Corbin	11,202
"Winner Pure Rye Whiskey," for whisky, W. Mulherin & Sons	11,180
"Wyman's Sa-Vo Salve," for salve, W. Wyman	11,183

PRINTS.

"Berlin Shape," for eyeglasses and spectacles, F. J. Rief	1,016
"There's Good Bread Ahead," for flour, Washburn, Crosby Co.	1,015

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

PERFORATED METALS
FOR ALL USES. MADE AS REQUIRED.
HARRINGTON & KING PERFORATING CO., 225 N. UNION ST. CHICAGO.

Roof/Leak?

Elliott's Durable Asphalt Coating

(Is composed of pure Utah Asphalt, prepared Linseed-Oil and Pine Creosote)

applied on an old leaky shingle, tin or felt roof will make it absolutely waterproof. Stops the rusting process in tin or iron, and stops warping or rotting of shingles. Will add ten years to the life of a new or old roof.

¶ ROOF LEAK is the most durable sun or winter proof paint or coating possible to make. Does not crack in winter or soften in summer. Easily applied. Imparts no taste to water.

¶ ROOF LEAK SHINGLE DIP renders the wood absolutely weatherproof, and when the shingles are nailed on the roof they become cemented together so tightly that warping which causes cracked shingles and loose nails is positively prevented.

¶ ROOF LEAK is shipped in the heavy liquid cement form, and is applied as received on worn and leaky surfaces. It is reduced with one quart of boiled linseed-oil to each gallon if used as a durable paint on surfaces in good condition. Shingle Dip is shipped ready for dipping.

¶ ROOF LEAK COATING AND ROOF LEAK SHINGLE DIP are made in Black, Maroon and Dark Green. Five gallons up to any quantity, 75c. per gallon, freight paid east of Denver. Returnable at our expense if not approved.

¶ ROOF LEAK is sold by up-to-date paint and hardware dealers. Those who try to sell you something else are not doing you justice, because "there is nothing else like ROOF LEAK."

¶ Liquid samples, together with an interesting booklet showing its various uses, will be sent on request, or to enable you to give it a practical test, we will send you for $1.00, delivered free to your door, one gallon, which is sufficient for cementing 100 square feet of leaky surface, or painting 200 square feet. One gallon of Shingle Dip covers about 400 square feet, shingles both sides.

ELLIOTT VARNISH CO., 156 Fulton Street, CHICAGO
263 Pearl Street, NEW YORK

Manufacturers of Fine Varnishes and Inventors of

Roof/Leak?

EASIER TO ROW ABSOLUTELY SAFE



Write to-day for free catalogue

15-foot boat, crated **$29.00** seat five persons in comfort. able for ladies and children.

Mullins Unsinkable Steel Pleasure Boats

Made of steel. Practically indestructible Air chamber each end. Cannot sink. Cannot leak. Require no caulking. Ideal boat for family use, summer resorts, parks. Guaranteed. Will The modern row boat for pleasure, safety and durability. No other boat so desir

W. H. MULLINS, 384 Depot St., Salem Ohio

CAST STEEL PIPES

We have special facilities for making and finishing steel pipes, crosses and tees and special fittings, to stand heavy pressures and up to ten feet in diameter. Our steel averages about 56,000 pounds tensile. **Open Hearth Steel Castings** for locomotives, ship building, electrical, piling and general machinery purposes. Subject to U. S. Government, Lloyds, Railroad and other specifications. RAIL OR WATER DELIVERIES.

SEABOARD STEELCASTING CO., Chester, Pa.

SPECIAL MANUFACTURING.
DIES AND STAMPINGS TO ORDER.
SPECIAL MACHINERY-MODELS-EXPERIMENTAL WORK.
DROP FORGING DIES AND DROP FORGINGS.
HARDWARE SPECIALTIES ETC. MANFD. TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET.
THE GLOBE MACHINE & STAMPING CO.
970 HAMILTON ST., CLEVELAND, OHIO.

WANTED.—TWENTY SKILLED MACHINE Draftsmen at $140 per diem. A competitive examination will be held about August 2d at the Washington Navy Yard. For additional information address Commandant, Navy Yard, Washington, D. C. The services of draftsmen being needed at once, emergency appointments will be given applicants who furnish satisfactory evidence that they are skilled machine draftsmen and who state their intention to compete for permanent appointment in examination above referred to.

ICE MACHINES. Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis

CHEMICAL EXAMINATIONS OF ALL KINDS.
DR. H. C. STIEFEL, Bissell Block, Pittsburgh, Pa.

MODELS & GEARS CATALOGUES FREE. UNION MODEL WORKS 193 CLARK, CHICAGO.

MODELS & EXPERIMENTAL WORK.
Inventions developed. Special Machinery.
E. V. BAILLARD, Fox Bldg., Franklin Square, New York.

DRYING MACHINES. S. E. WORRELL, Hannibal, Mo.

MODEL AND EXPERIMENTAL WORK.
Electrical and Mechanical Instruments. Small Mach'y.
EDWARD KLEINSCHMIDT, 82 W. Broadway, New York.

MODELS CHICAGO MODEL WORKS
Established 1867 179 E. Madison St., Chicago, Ill
Write for Catalogue of Model Supplies

BUILDERS of Special Machinery. Models, Experimental work. Inventions developed. THE FENN-SADLER MACH. CO., Hartford, Conn.

Dies, Tools, Models and Special Machinery. Metal Specialties and Stampings Manufactured.
HOEFT & MOORE, Chicago, U. S. A.
OFFICE: 846 NORTH AVENUE. WORKS: INDIANA & FRANKLIN STREETS.

We Manufacture on Contract
Anything Mechanical in Any Metal.
MICHIGAN NOVELTY WORKS, Kalamazoo, Mich.

THE STATE UNIVERSITY OF IOWA
SCHOOL OF APPLIED SCIENCE, Iowa City, Iowa.
High grade courses in ENGINEERING. Numerous technical courses in special branches. Adequate equipment *University* environment. Location unsurpassed. Expenses low. Address G. E. MACLEAN, President.

"How to Successfully Operate a Gas or Gasoline Engine." This book is the latest and the "Last Word" on the subject. Pocket Edition. **Price Fifty Cents.** For sale by the EUREKA PUBLISHING Co., Box 467, Rochester, N. Y.

SAVE MONEY and appear neat by wearing **M. & M. Rubber Collars.** They never wilt or turn yellow. Price 25 cents. Send for catalogue. Agents wanted. Address M. & M. MFG. CO., 7th Street, Springfield, Mass.

Manufacturers of **HARDWARE SPECIALTIES**
Contract Manufacturers and will market articles of merit
LORIMER MFG. CO., 153 S. Jefferson St., Chicago, Ill.

SPLITDORF SPARK COILS
25 VANDEWATER ST. N.Y.

MECHANICAL MANUFACTURERS wishing to establish branch in New York City, can be represented by NATIONAL SUPPLY CO., 835 Broadway, N. Y.

TYPEWRITER HEADQUARTERS
352 Broadway, New York, sell all makes under half-price. Don't buy before sending for samples of writing, prices, exchange and unprejudiced advice. Immense stock for selection. Shipped for trial. Guaranteed first-class condition. Dealers supplied.

WINTON



Absolute air governor, guaranteed tires, indestructible crank-shaft, mechanically correct transmission, thoroughly reliable ignition. Completely equipped, **$2,500** f. o. b. Cleveland; without top, **$2,300.** Prompt deliveries.

THE WINTON MOTOR CARRIAGE CO., Cleveland, O., U.S.A.

The Orient Surrey

Price $450



Speed 18 to 20 miles per hour. Will climb all grades and carry four people anywhere they wish to go

Write for catalogue

WALTHAM MANUFACTURING CO.
Waltham, Mass.

Coffin Valve Gear

U. S. PATENT, No. 12,225, MAY 24, 1904.

Box 23. **W. C. SMITH, Amesbury, Mass.**

DARRACQ



12, 15-20, 30-35 Horse Powers

Favorite of two continents. Holds more records for speed and endurance than any other make. Prompt deliveries. Duplicate parts always on hand.

AMERICAN DARRACQ AUTOMOBILE CO.
Controlled by E. A. La Roche Co., 652 Hudson Street
147 West 38th St., New York

Micro Scopes

Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World.

Catalogs free.

BAUSCH & LOMB OPT. CO.
ROCHESTER, N.Y.



In the shop **GAS** is to be **the Predominant Power.**

Use **"TRUE" GAS ENGINE** for speed, power and economy. Four cycle. Vertical type.

Runs as smooth as a new pack of cards.

10, 15, 20—H.P.—30, 40, 60, 100 supplied at once, others on demand.

FRANK RIDLON CO.
200 Summer St. Boston, Mass.



CHARTER

GAS and GASOLINE
For All Work.

Stationaries, Portables, Hoisters, Pumpers, Sawing & Boat Outfits.

Send for Catalogue and Testimonials

State Your Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

What Is Daus' Tip-Top?



TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on ten (10) days' trial.

Price $7.50 less trade discount of 33⅓ per cent, or $5 Net

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM. JESSOP & SONS LTD 91 JOHN ST NEW YORK



COATES FLEXIBLE SHAFT

Ball-bearing, Unit System, Link Construction

¼ H.P. or 150 H.P. all the same to us.
Send for bulletin No. 16.

COATES CLIPPER MANUFACTURING COMPANY - WORCESTER, MASS.



A BRAKE IS "THE JEWEL" OF BICYCLE MECHANISM

It is simply lawlessness to life and apparatus not to take advantage of the new principle applied in the new 1904

MORROW BRAKE

Morrow Trade-Mark

The Morrow avoids all troubles by employing but one clutch. Send for a catalogue and learn the recommendatory features of this perfect device.

PRICE, $5. ECLIPSE MACHINE CO., Elmira, N. Y.

EAT AND SLEEP IN COMFORT

In hot weather it is difficult to eat meals comfortably or to get refreshing sleep at night. These are possible with the use of an Edison Battery Fan Motor Outfit, and the cost is small compared with the comfort obtained. Our Booklet No. 23 F tells more about these Fan Outfits. They operate independently of the street current.

TRADE MARK
Thomas A. Edison

EDISON MFG. COMPANY
Factory **Orange, N. J.**

NEW YORK
83 Chambers Street

CHICAGO
304 Wabash Avenue

The Sun Typewriter No. 2

PERFECT IN MECHANICAL ACTION

It is a type lever or type bar machine. It has visible writing in its truest form. It has unlimited speed. Beautiful print. It is a heavy manifolder. A high-grade writing machine sold for $40. Active agents desired in territory not allotted.

SUN TYPEWRITER CO., 289 Broadway, New York



THE "BEST" LIGHT

Outshines the Sun.

It's pure white light makes day of night. Costs less than kerosene; six times more powerful than electricity. Examined, tested and permitted by underwriters' association.

CATALOG FREE.

NO DIRT -- NO WICK -- NO SMOKE -- NO SMELL

Agents wanted. Exclusive territory, good commission paid

THE BEST LIGHT COMPANY,
Sole Owners of Original Patents. 87 E. 6th St., Canton, Ohio.

Low-Priced Electric Wagons



Capacity 1 to 3 Tons

Double Motor Equipment
Direct Double Chain Drive
No Gears or Pinions

THE AUTO-CAR EQUIPMENT CO.
Buffalo, N. Y.

(Camp Mattress with Pillow attached. Also Showing Mattress deflated.)

THE IDEAL BED

For Home, Camp, Yacht, Hospital

NON-ABSORBENT—HYGIENIC—ODORLESS. When deflated can be rolled into small package for storage or transportation. NO CAMPING OUTFIT COMPLETE WITHOUT THEM. **"Perfection" Air Cushions** for Office, Easy, and Invalid Chairs, Yachts and Small Boats. Send for descriptive booklet "A" and price list.

Mechanical Fabric Co., PROVIDENCE, R. I.

Radium

The Spathariscope, giving most brilliant effects, postpaid, $9.00. Radiant Tubes, containing Radium mixture for demonstrating fluorescence, $7.50. Newton's Radiometer, demonstrating by means of magic lantern the electrical properties of Radium. The N. Radiometer for demonstrating the N. Rays. Radium of both high and low activity. Radiographic Lantern Slides. Uranium Concentrates. Pitchblende, Willemite. Write for circulars to

Williams, Brown & Earle, Dept. 6, 918 Chestnut St., Philadelphia

CRANE PULLER.—"THE TOOL FROM MASSACHUSETTS."

A DELIBERATE ACCEPTANCE OF THIS IMPLEMENT UPON OUR WORD

will reward the buyer with a NEW tool designed for drawing off cams, wheels, pulleys, etc., and forcing on or off sleeves, couplings and the like.

No. 3.—For use in machine shops and automobile repair shops.
No. 2.—For automobile kits.

Under proper conditions the CRANE PULLER can be employed as a shaft straightener and also as a jack. Capacity, 10 tons.

TO GET "ON PULLING TERMS" WITH US

Write to **CRANE & RICHARDSON, 113 Water Street, Boston, Mass.**

ACCURATE RELIABLE DURABLE

New England

STYLISH & EFFECTIVE IN DESIGN

WATCHES

We know that our watches will do what we expect of them, therefore, it is easy to unquestionably guarantee every watch we make, from the cheapest to the most expensive grade.

THE NEW ENGLAND WATCH CO., 37 & 39 Maiden Lane, New York
7 Snow Hill, London, England

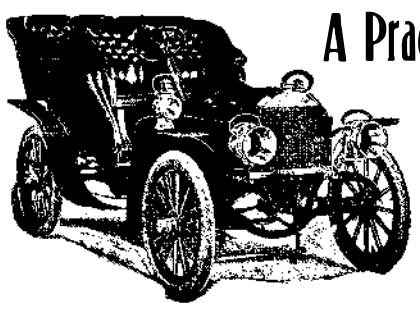

A Practical Car for American Roads.

Three Speeds and Reverse. Sliding Transmission. Interlocking Devices Throughout. Bevel Gear Drive Direct in Top Speed.

2 cylinder upright motor, 18-20 Horse Power.
4 " " " 32-35 " "

Prices $2,300 to $4,000.

Aluminum Bodies. Canopy Top or Limousene Types. Descriptive Catalogue sent upon request.

ROYAL MOTOR CAR CO.,
100 Marquette St., Cleveland, Ohio, U. S. A.

COLD GALVANIZING.

AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.



NICKEL AND **Electro-Plating** Apparatus and Material.

THE **Hanson & VanWinkle Co.,**
Newark, N. J.
92 William St., N. Y.
30 & 32 S. Canal St. Chicago.

Perkins Power Presses



The Model "La" Press
Our Famous No. 6

a miracle of precision and power starts to work on operating this press. Owing to being built in lots of 100, we can place this

PUNCHING PRESS

within the reach of all.

In Their Respective Walks of Utility the output illustrated and described in our catalogues, shows an incontestable preeminence. Send for them. Free of cost.

PERKINS MACHINE CO., 12 Perkins St., Warren, Mass.

RAVEL

Important To All Who Travel

Waterman's Ideal Fountain Pen

Among the essentials — not luxuries — to your traveling equipment you must class the Waterman's Ideal. It is as indispensable to the vest pocket of the gentleman tourist as to the business man.

Sold by leading dealers in all towns and cities of importance and in all fashionable resorts as well as by your local dealer at home.

L. E. Waterman Co.
173 Broadway New York City
12 Golden Lane, London, E. C.
Cor. 7th and Olive Sts., Varied Industries Bldg., St. Louis

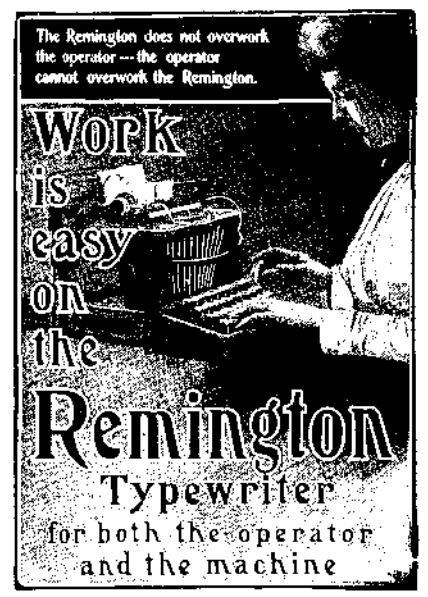
The Remington does not overwork the operator — the operator cannot overwork the Remington.
Work is easy on the
Remington
Typewriter
for both the operator and the machine

Remington Typewriter Co., 327 B'way, N. Y.

MENNEN'S BORATED TALCUM TOILET POWDER



A Positive Relief for PRICKLY HEAT, CHAFING, and SUNBURN, and all affections of the skin.

Removes all odor of perspiration. Delightful after Shaving. Sold everywhere, or mailed on receipt of 25c. Get Mennen's (the original). *Sample Free.*

GERHARD MENNEN COMPANY, Newark, N.J.

WATER

So simple!
So powerful!!
So easy to start!!
Built to do work!

For Pleasure Water Works. Skilfully Installed.

BOSTON—Hunt, Moss & Co. 43 S. Market St.
Send for Catalogue.

RUST ON GUNS TOOLS & CYCLES **PREVENTED** BY **MANNOCITIN**
C. M. BESLY & CO. CHICAGO ILLUS.

15 to 21 Clinton Street.